

D-09-CF


CARBON MEDIA FILTER

Duplex Activated Carbon Filter for High Capacity Service Flow Rate

Reduces Chlorine, chlorine taste and odour. Decreases organic based colour, taste and odour. Lowers pesticides and chemicals.




ACTIVATED CARBON FILTER



FEATURES

- Save time and reduce labour costs with this preassembled kit
- Easy to order with a single product code
- Reduce maintenance costs with the No Unfiltered Water Bypass Valve option
- Choice of different metered control options
- Save on costs with fewer media replacements with separate source backwash option
- Suitable for any site application with flexible Filter configurations
- Reduced downtime with sequential or parallel controls for multiple Filters

PLANS/DRAWINGS

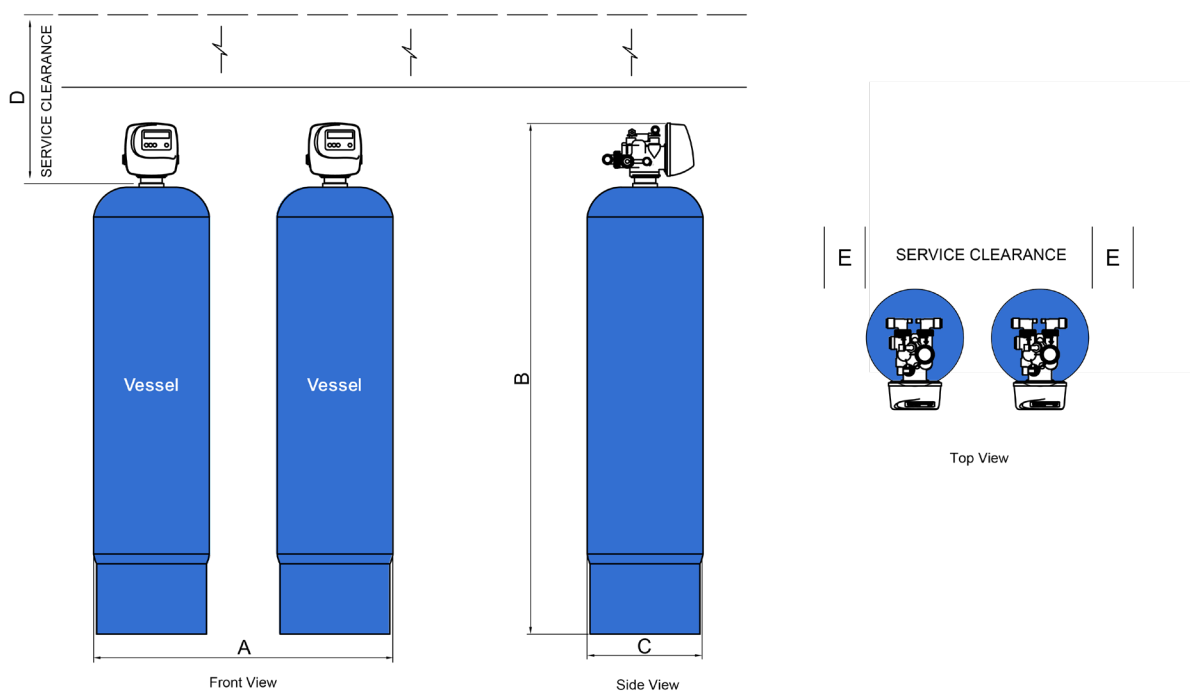

SPECIFICATIONS

PRODUCT CODE

D-09-CF

FLOW RATES

Service Flow (lpm)	16
Peak Service Flow (lpm)	32
Backwash Flow (lpm)	16

OPERATING PRESSURES

Min Operating Pressure	240kPa
Max Operating Pressure	700kPa

CONNECTIONS

Inlet/Outlet Connection size	25mm BSPM
Drain Connection Size	19mm Hose Barb

TEMPERATURE RANGE

5°C - 43°C

WEIGHT

Approximate Operating Weight (kg) 120

ELECTRICAL

Supply 2 x GPO 240V,10Amp

DIMENSIONS

Overall System Width (A)	770mm
Overall System Height (B)	1470mm
Overall System Depth (C)	585mm
Service Clearance (D)	500mm
Service Clearance (E)	500mm

Disclaimer. Southland Filtration reserves the right to, at any time change any details of design, specifications and performance figures of any published data.

Freecall 1800 656 771
southlandfiltration.com.au

southland
 FILTRATION

D-10-CF


CARBON MEDIA FILTER

Duplex Activated Carbon Filter for High Capacity Service Flow Rate

Reduces Chlorine, chlorine taste and odour. Decreases organic based colour, taste and odour. Lowers pesticides and chemicals.




ACTIVATED CARBON FILTER



FEATURES

- Save time and reduce labour costs with this preassembled kit
- Easy to order with a single product code
- Reduce maintenance costs with the No Unfiltered Water Bypass Valve option
- Choice of different metered control options
- Save on costs with fewer media replacements with separate source backwash option
- Suitable for any site application with flexible Filter configurations
- Reduced downtime with sequential or parallel controls for multiple Filters

PLANS/DRAWINGS

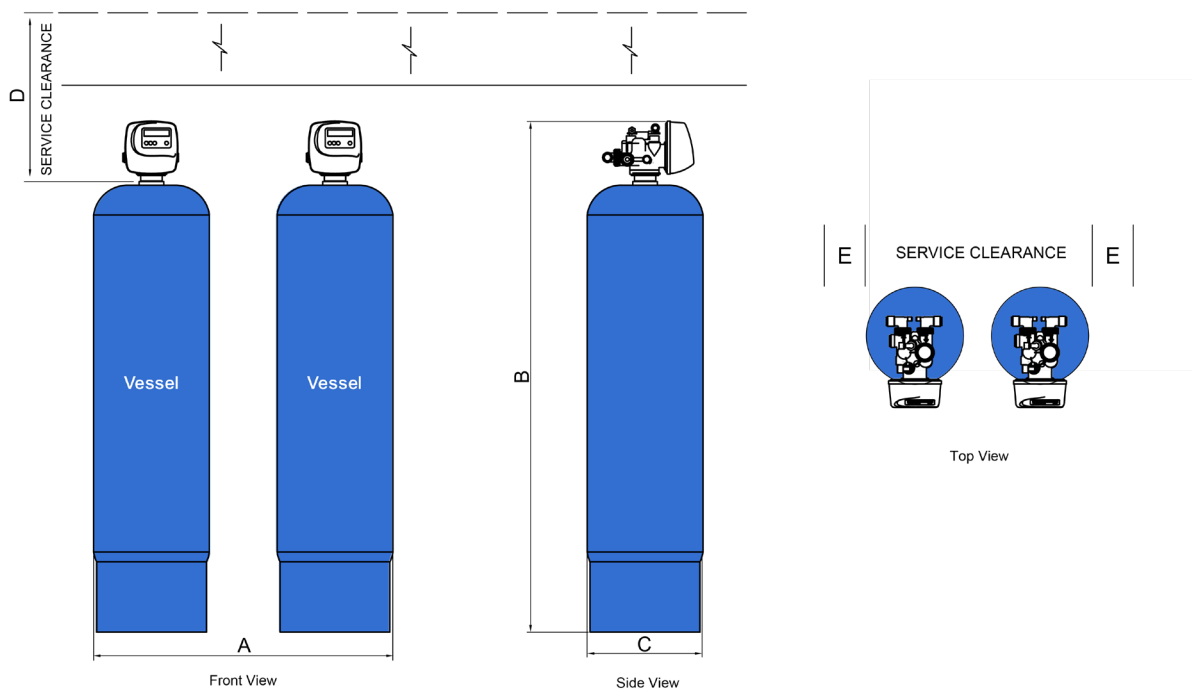

SPECIFICATIONS

PRODUCT CODE

D-10-CF

FLOW RATES

Service Flow (lpm)	20
Peak Service Flow (lpm)	40
Backwash Flow (lpm)	20

OPERATING PRESSURES

Min Operating Pressure	240kPa
Max Operating Pressure	700kPa

CONNECTIONS

Inlet/Outlet Connection size	25mm BSPM
Drain Connection Size	19mm Hose Barb

TEMPERATURE RANGE

5°C - 43°C

WEIGHT

Approximate Operating Weight (kg) 170

ELECTRICAL

Supply 2 x GPO 240V,10Amp

DIMENSIONS

Overall System Width (A)	800mm
Overall System Height (B)	1575mm
Overall System Depth (C)	600mm
Service Clearance (D)	500mm
Service Clearance (E)	500mm

Disclaimer. Southland Filtration reserves the right to, at any time change any details of design, specifications and performance figures of any published data.

Freecall 1800 656 771
southlandfiltration.com.au

southland
 FILTRATION

D-12-CF


CARBON MEDIA FILTER

Duplex Activated Carbon Filter for High Capacity Service Flow Rate

Reduces Chlorine, chlorine taste and odour. Decreases organic based colour, taste and odour. Lowers pesticides and chemicals.




ACTIVATED CARBON FILTER



FEATURES

- Save time and reduce labour costs with this preassembled kit
- Easy to order with a single product code
- Reduce maintenance costs with the No Unfiltered Water Bypass Valve option
- Choice of different metered control options
- Save on costs with fewer media replacements with separate source backwash option
- Suitable for any site application with flexible Filter configurations
- Reduced downtime with sequential or parallel controls for multiple Filters

PLANS/DRAWINGS

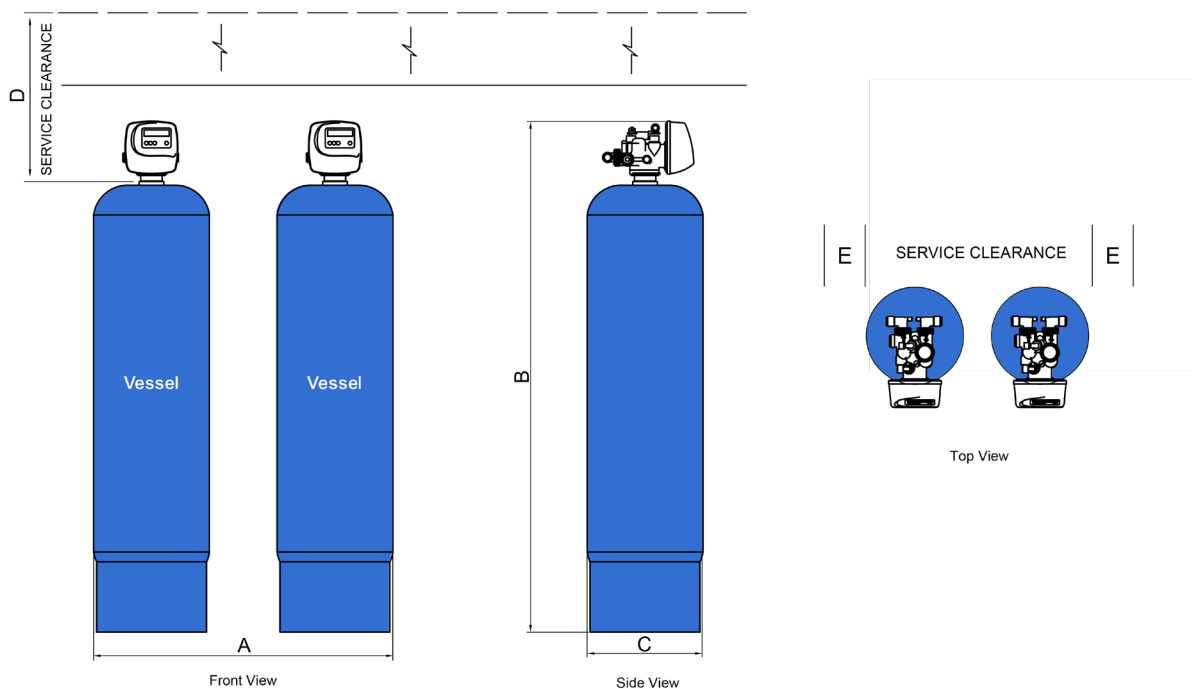

SPECIFICATIONS

PRODUCT CODE

D-12-CF

FLOW RATES

Service Flow (lpm)	30
Peak Service Flow (lpm)	60
Backwash Flow (lpm)	28

OPERATING PRESSURES

Min Operating Pressure	240kPa
Max Operating Pressure	700kPa

CONNECTIONS

Inlet/Outlet Connection size	25mm BSPM
Drain Connection Size	19mm Hose Barb

TEMPERATURE RANGE

5°C - 43°C

WEIGHT

Approximate Operating Weight (kg) 220

ELECTRICAL

Supply 2 x GPO 240V,10Amp

DIMENSIONS

Overall System Width (A)	910mm
Overall System Height (B)	1525mm
Overall System Depth (C)	655mm
Service Clearance (D)	500mm
Service Clearance (E)	500mm

Disclaimer. Southland Filtration reserves the right to, at any time change any details of design, specifications and performance figures of any published data.

Freecall 1800 656 771
southlandfiltration.com.au

southland
 FILTRATION

D-13-CF


CARBON MEDIA FILTER

**Duplex Activated Carbon Filter for
High Capacity Service Flow Rate**

Reduces Chlorine, chlorine taste and odour. Decreases organic based colour, taste and odour. Lowers pesticides and chemicals.



**ACTIVATED
CARBON
FILTER**




FEATURES

- Save time and reduce labour costs with this preassembled kit
- Easy to order with a single product code
- Reduce maintenance costs with the No Unfiltered Water Bypass Valve option
- Choice of different metered control options
- Save on costs with fewer media replacements with separate source backwash option
- Suitable for any site application with flexible Filter configurations
- Reduced downtime with sequential or parallel controls for multiple Filters

Freecall 1800 656 771
southlandfiltration.com.au

PLANS/DRAWINGS

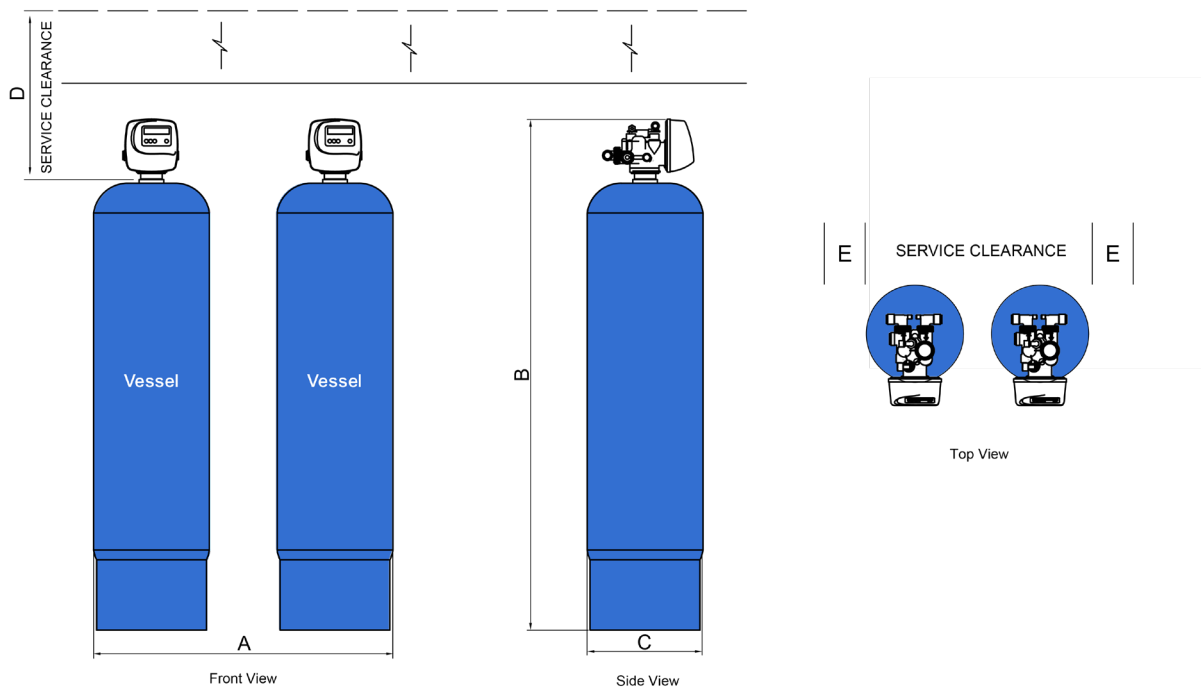

SPECIFICATIONS

PRODUCT CODE

D-13-CF

FLOW RATES

Service Flow (lpm)	36
Peak Service Flow (lpm)	72
Backwash Flow (lpm)	34

OPERATING PRESSURES

Min Operating Pressure	240kPa
Max Operating Pressure	700kPa

CONNECTIONS

Inlet/Outlet Connection size	25mm BSPM
Drain Connection Size	19mm Hose Barb

TEMPERATURE RANGE

5°C - 43°C

WEIGHT

Approximate Operating Weight (kg) 260

ELECTRICAL

Supply 2 x GPO 240V,10Amp

DIMENSIONS

Overall System Width (A)	960mm
Overall System Height (B)	1635mm
Overall System Depth (C)	680mm
Service Clearance (D)	500mm
Service Clearance (E)	500mm

Disclaimer. Southland Filtration reserves the right to, at any time change any details of design, specifications and performance figures of any published data.

Freecall 1800 656 771
southlandfiltration.com.au

southland
 FILTRATION

D-14-CF


CARBON MEDIA FILTER

Duplex Activated Carbon Filter for High Capacity Service Flow Rate

Reduces Chlorine, chlorine taste and odour. Decreases organic based colour, taste and odour. Lowers pesticides and chemicals.




ACTIVATED CARBON FILTER



FEATURES

- Save time and reduce labour costs with this preassembled kit
- Easy to order with a single product code
- Reduce maintenance costs with the No Unfiltered Water Bypass Valve option
- Choice of different metered control options
- Save on costs with fewer media replacements with separate source backwash option
- Suitable for any site application with flexible Filter configurations
- Reduced downtime with sequential or parallel controls for multiple Filters

PLANS/DRAWINGS

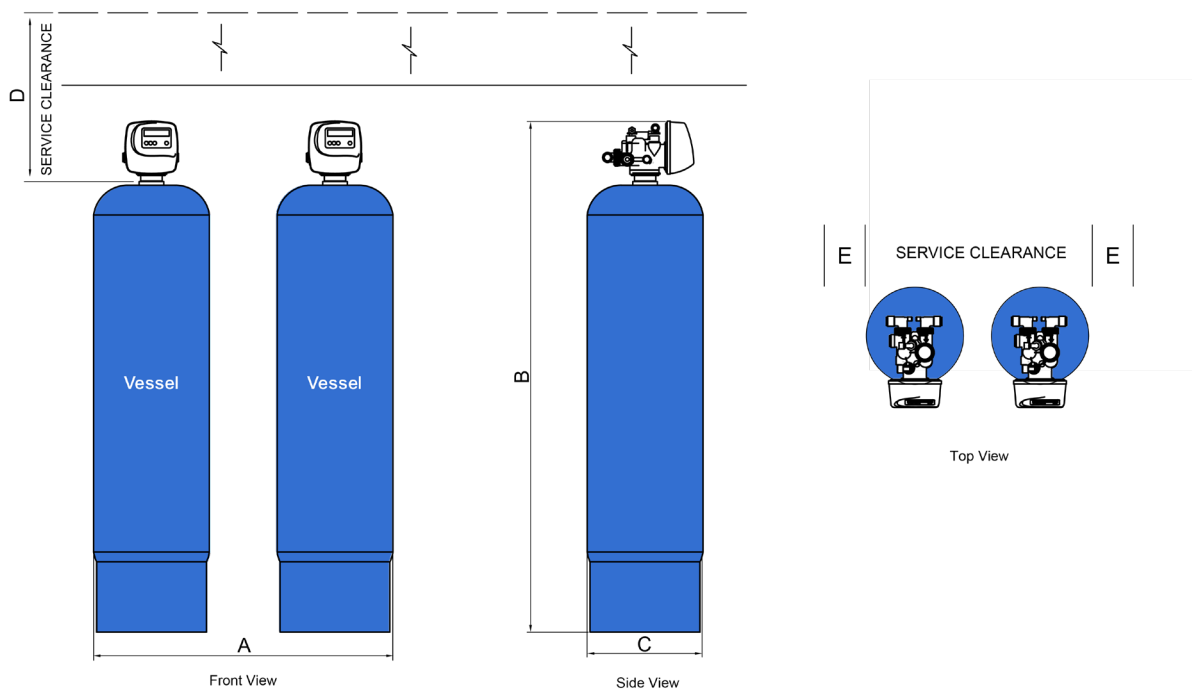

SPECIFICATIONS

PRODUCT CODE

D-14-CF

FLOW RATES

Service Flow (lpm)	40
Peak Service Flow (lpm)	80
Backwash Flow (lpm)	41

OPERATING PRESSURES

Min Operating Pressure	240kPa
Max Operating Pressure	700kPa

CONNECTIONS

Inlet/Outlet Connection size	32mm BSPM
Drain Connection Size	25mm Hose Barb

TEMPERATURE RANGE

5°C - 43°C

WEIGHT

Approximate Operating Weight (kg) 370

ELECTRICAL

Supply 2 x GPO 240V,10Amp

DIMENSIONS

Overall System Width (A)	1020mm
Overall System Height (B)	1865mm
Overall System Depth (C)	710mm
Service Clearance (D)	500mm
Service Clearance (E)	500mm

Disclaimer. Southland Filtration reserves the right to, at any time change any details of design, specifications and performance figures of any published data.

Freecall 1800 656 771
southlandfiltration.com.au

southland
 FILTRATION

D-16-CF


CARBON MEDIA FILTER

Duplex Activated Carbon Filter for High Capacity Service Flow Rate

Reduces Chlorine, chlorine taste and odour. Decreases organic based colour, taste and odour. Lowers pesticides and chemicals.




ACTIVATED CARBON FILTER



FEATURES

- Save time and reduce labour costs with this preassembled kit
- Easy to order with a single product code
- Reduce maintenance costs with the No Unfiltered Water Bypass Valve option
- Choice of different metered control options
- Save on costs with fewer media replacements with separate source backwash option
- Suitable for any site application with flexible Filter configurations
- Reduced downtime with sequential or parallel controls for multiple Filters

PLANS/DRAWINGS

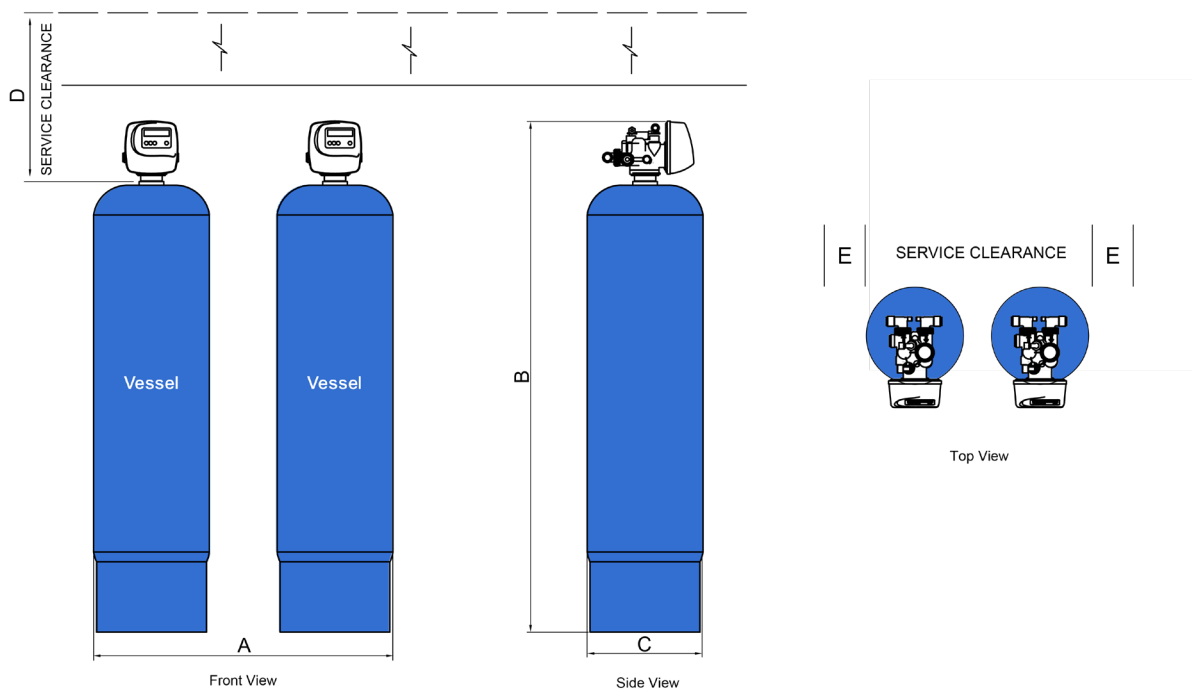

SPECIFICATIONS

PRODUCT CODE

D-16-CF

FLOW RATES

Service Flow (lpm) 53

Peak Service Flow (lpm) 106

Backwash Flow (lpm) 56

OPERATING PRESSURES

Min Operating Pressure 240kPa

Max Operating Pressure 700kPa

CONNECTIONS

Inlet/Outlet Connection size 32mm BSPM

Drain Connection Size 25mm Hose Barb

TEMPERATURE RANGE

5°C - 43°C

WEIGHT

Approximate Operating Weight (kg) 500

ELECTRICAL

Supply 2 x GPO 240V,10Amp

DIMENSIONS

Overall System Width (A) 1220mm

Overall System Height (B) 1944mm

Overall System Depth (C) 810mm

Service Clearance (D) 500mm

Service Clearance (E) 500mm

Disclaimer. Southland Filtration reserves the right to, at any time change any details of design, specifications and performance figures of any published data.

Freecall 1800 656 771
southlandfiltration.com.au

southland
 FILTRATION

D-18-CF


CARBON MEDIA FILTER

Duplex Activated Carbon Filter for High Capacity Service Flow Rate

Reduces Chlorine, chlorine taste and odour. Decreases organic based colour, taste and odour. Lowers pesticides and chemicals.




ACTIVATED CARBON FILTER



FEATURES

- Save time and reduce labour costs with this preassembled kit
- Easy to order with a single product code
- Reduce maintenance costs with the No Unfiltered Water Bypass Valve option
- Choice of different metered control options
- Save on costs with fewer media replacements with separate source backwash option
- Suitable for any site application with flexible Filter configurations
- Reduced downtime with sequential or parallel controls for multiple Filters

PLANS/DRAWINGS

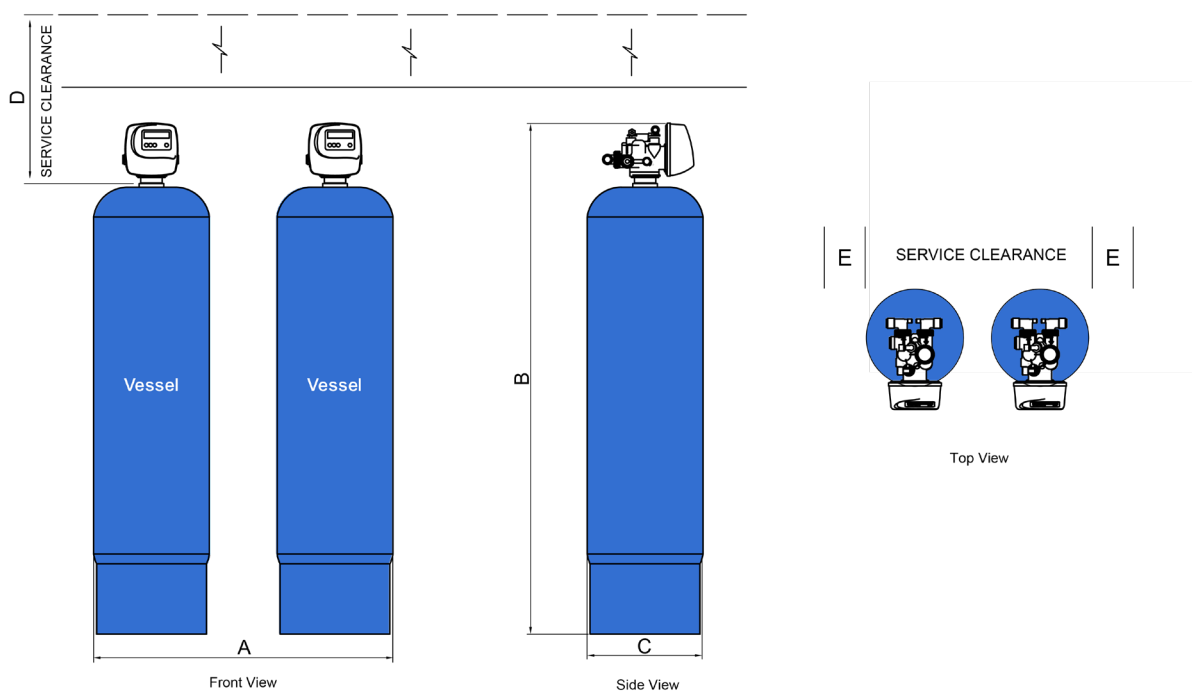

SPECIFICATIONS

PRODUCT CODE

D-18-CF

FLOW RATES

Service Flow (lpm) 67

Peak Service Flow (lpm) 134

Backwash Flow (lpm) 66

OPERATING PRESSURES

Min Operating Pressure 240kPa

Max Operating Pressure 700kPa

CONNECTIONS

Inlet/Outlet Connection size 40mm BSPF

Drain Connection Size 40mm BSPF

TEMPERATURE RANGE

5°C - 43°C

WEIGHT

Approximate Operating Weight (kg) 710

ELECTRICAL

Supply 2 x GPO 240V,10Amp

DIMENSIONS

Overall System Width (A) 1320mm

Overall System Height (B) 2000mm

Overall System Depth (C) 860mm

Service Clearance (D) 1000mm

Service Clearance (E) 500mm

Disclaimer. Southland Filtration reserves the right to, at any time change any details of design, specifications and performance figures of any published data.

Freecall 1800 656 771
southlandfiltration.com.au

southland
 FILTRATION

D-21-CF


CARBON MEDIA FILTER

Duplex Activated Carbon Filter for High Capacity Service Flow Rate

Reduces Chlorine, chlorine taste and odour. Decreases organic based colour, taste and odour. Lowers pesticides and chemicals.




ACTIVATED CARBON FILTER



FEATURES

- Save time and reduce labour costs with this preassembled kit
- Easy to order with a single product code
- Reduce maintenance costs with the No Unfiltered Water Bypass Valve option
- Choice of different metered control options
- Save on costs with fewer media replacements with separate source backwash option
- Suitable for any site application with flexible Filter configurations
- Reduced downtime with sequential or parallel controls for multiple Filters

PLANS/DRAWINGS

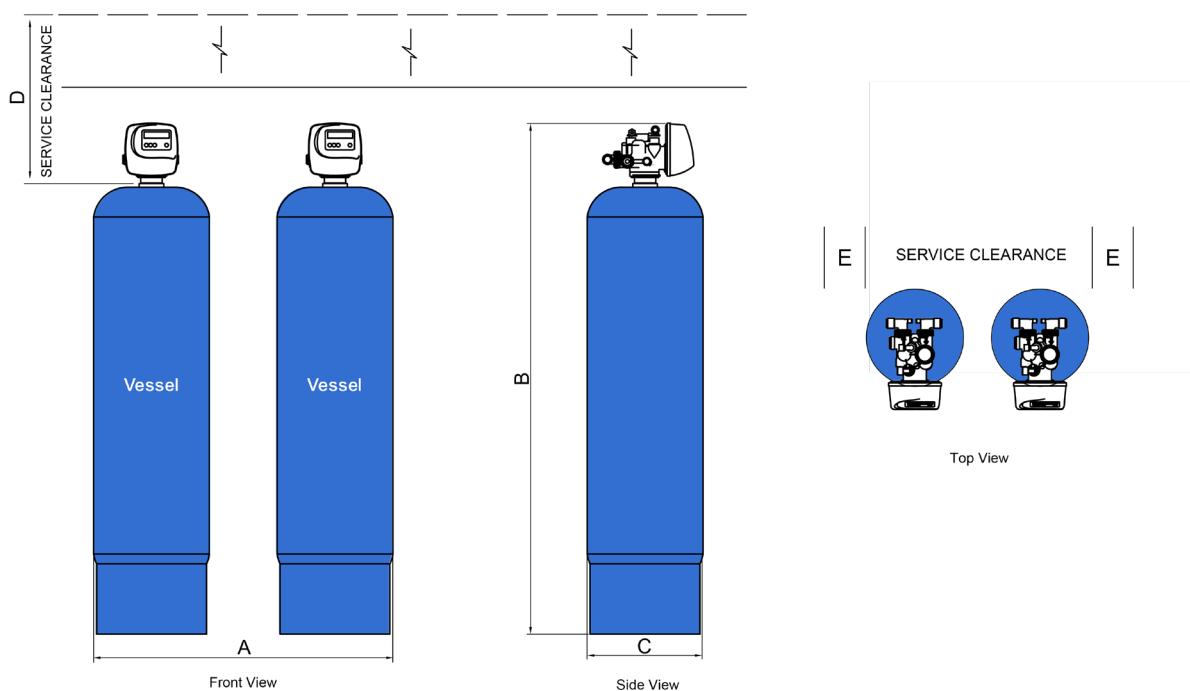

SPECIFICATIONS

PRODUCT CODE

D-21-CF

FLOW RATES

Service Flow (lpm) 91

Peak Service Flow (lpm) 182

Backwash Flow (lpm) 92

OPERATING PRESSURES

Min Operating Pressure 240kPa

Max Operating Pressure 700kPa

CONNECTIONS

Inlet/Outlet Connection size 40mm BSPF

Drain Connection Size 40mm BSPF

TEMPERATURE RANGE

5°C - 43°C

WEIGHT

Approximate Operating Weight (kg) 900

ELECTRICAL

Supply 2 x GPO 240V,10Amp

DIMENSIONS

Overall System Width (A) 1470mm

Overall System Height (B) 2000mm

Overall System Depth (C) 935mm

Service Clearance (D) 1000mm

Service Clearance (E) 500mm

Disclaimer. Southland Filtration reserves the right to, at any time change any details of design, specifications and performance figures of any published data.

Freecall 1800 656 771
southlandfiltration.com.au

southland
 FILTRATION

D-24-CF


CARBON MEDIA FILTER

Duplex Activated Carbon Filter for High Capacity Service Flow Rate

Reduces Chlorine, chlorine taste and odour. Decreases organic based colour, taste and odour. Lowers pesticides and chemicals.




ACTIVATED CARBON FILTER



FEATURES

- Save time and reduce labour costs with this preassembled kit
- Easy to order with a single product code
- Reduce maintenance costs with the No Unfiltered Water Bypass Valve option
- Choice of different metered control options
- Save on costs with fewer media replacements with separate source backwash option
- Suitable for any site application with flexible Filter configurations
- Reduced downtime with sequential or parallel controls for multiple Filters

PLANS/DRAWINGS

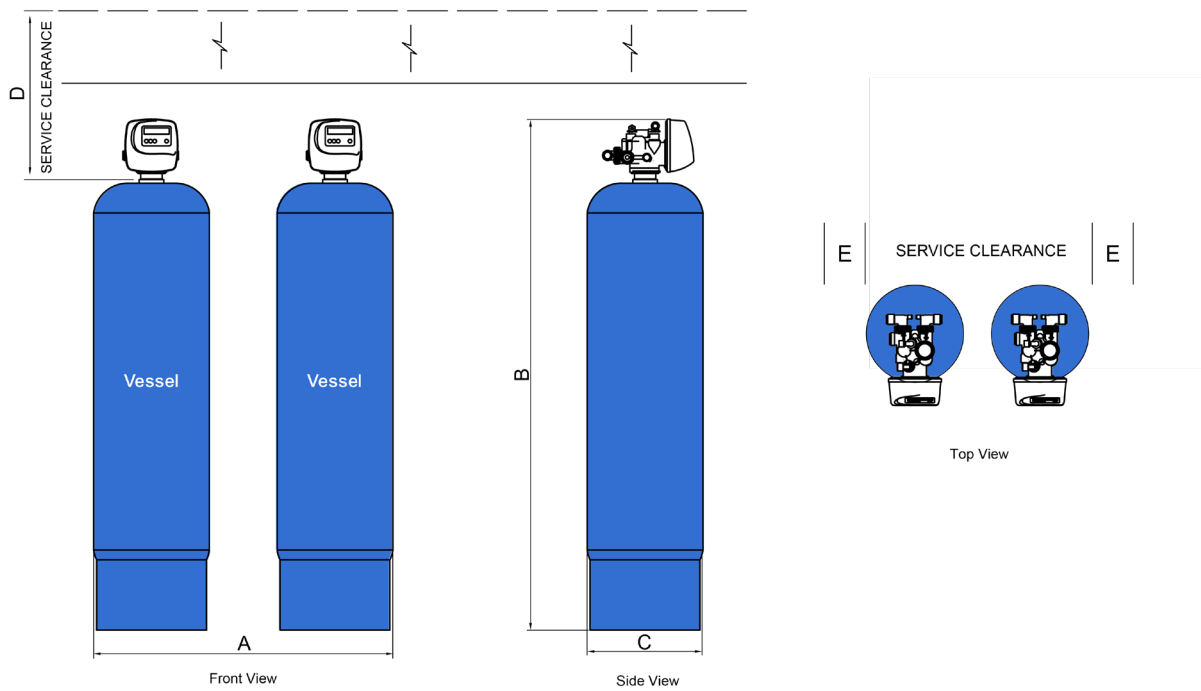

SPECIFICATIONS

PRODUCT CODE

D-24-CF

FLOW RATES

Service Flow (lpm)	119
Peak Service Flow (lpm)	238
Backwash Flow (lpm)	119

OPERATING PRESSURES

Min Operating Pressure	240kPa
Max Operating Pressure	700kPa

CONNECTIONS

Inlet/Outlet Connection size	50mm BSPF
Drain Connection Size	50mm BSPF

TEMPERATURE RANGE

5°C - 43°C

WEIGHT

Approximate Operating Weight (kg) 1230

ELECTRICAL

Supply 2 x GPO 240V,10Amp

DIMENSIONS

Overall System Width (A)	1620mm
Overall System Height (B)	2200mm
Overall System Depth (C)	1010mm
Service Clearance (D)	1000mm
Service Clearance (E)	500mm

Disclaimer. Southland Filtration reserves the right to, at any time change any details of design, specifications and performance figures of any published data.

Freecall 1800 656 771
southlandfiltration.com.au

southland
 FILTRATION

D-30-CF


CARBON MEDIA FILTER

Duplex Activated Carbon Filter for High Capacity Service Flow Rate

Reduces Chlorine, chlorine taste and odour. Decreases organic based colour, taste and odour. Lowers pesticides and chemicals.




ACTIVATED CARBON FILTER



FEATURES

- Save time and reduce labour costs with this preassembled kit
- Easy to order with a single product code
- Reduce maintenance costs with the No Unfiltered Water Bypass Valve option
- Choice of different metered control options
- Save on costs with fewer media replacements with separate source backwash option
- Suitable for any site application with flexible Filter configurations
- Reduced downtime with sequential or parallel controls for multiple Filters

PLANS/DRAWINGS

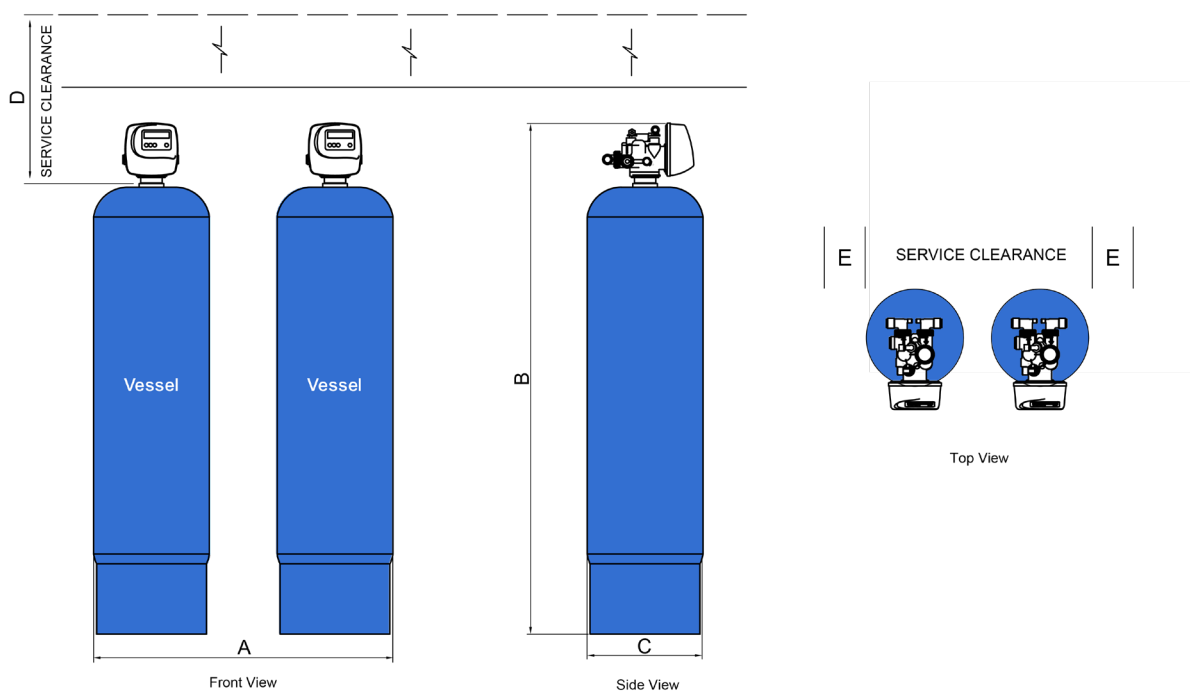

SPECIFICATIONS

PRODUCT CODE

D-30-CF

FLOW RATES

Service Flow (lpm) 187

Peak Service Flow (lpm) 376

Backwash Flow (lpm) 186

OPERATING PRESSURES

Min Operating Pressure 240kPa

Max Operating Pressure 700kPa

CONNECTIONS

Inlet/Outlet Connection size 50mm BSPF

Drain Connection Size 50mm BSPF

TEMPERATURE RANGE

5°C - 43°C

WEIGHT

Approximate Operating Weight (kg) 1890

ELECTRICAL

Supply 2 x GPO 240V,10Amp

DIMENSIONS

Overall System Width (A) 1940mm

Overall System Height (B) 2060mm

Overall System Depth (C) 1170mm

Service Clearance (D) 1000mm

Service Clearance (E) 500mm

Disclaimer. Southland Filtration reserves the right to, at any time change any details of design, specifications and performance figures of any published data.

Freecall 1800 656 771
southlandfiltration.com.au

southland
 FILTRATION

D-36-CF


CARBON MEDIA FILTER

Duplex Activated Carbon Filter for High Capacity Service Flow Rate

Reduces Chlorine, chlorine taste and odour. Decreases organic based colour, taste and odour. Lowers pesticides and chemicals.




ACTIVATED CARBON FILTER



FEATURES

- Save time and reduce labour costs with this preassembled kit
- Easy to order with a single product code
- Reduce maintenance costs with the No Unfiltered Water Bypass Valve option
- Choice of different metered control options
- Save on costs with fewer media replacements with separate source backwash option
- Suitable for any site application with flexible Filter configurations
- Reduced downtime with sequential or parallel controls for multiple Filters

PLANS/DRAWINGS

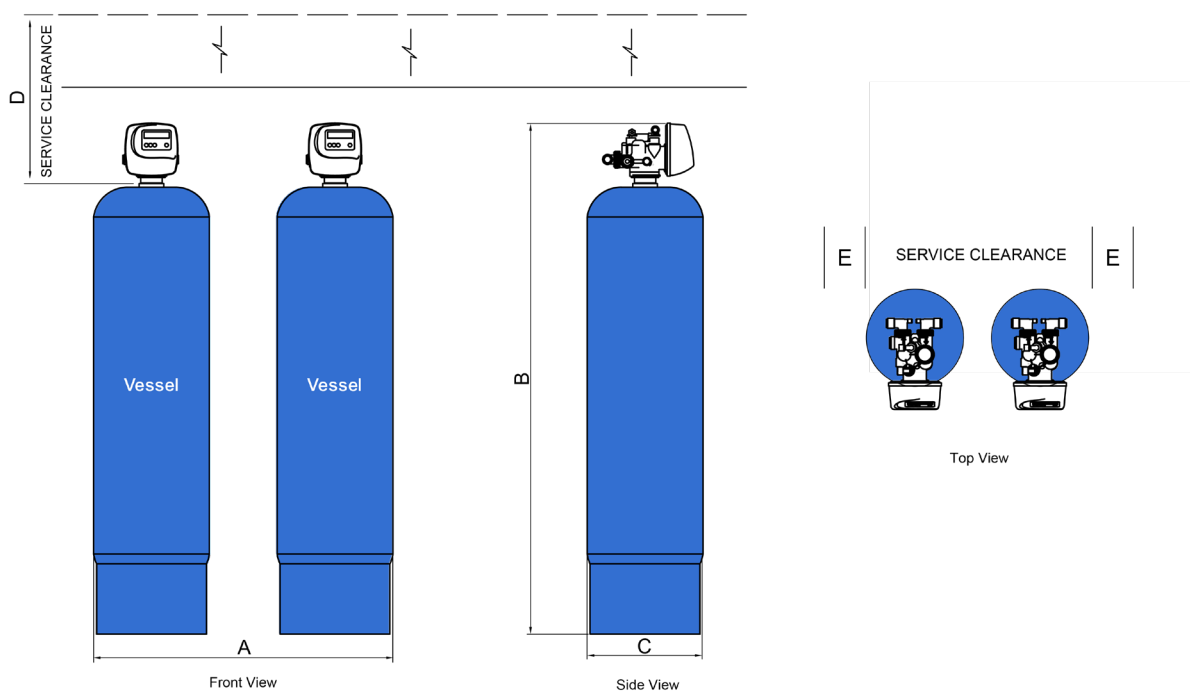

SPECIFICATIONS

PRODUCT CODE

D-36-CF

FLOW RATES

Service Flow (lpm)	269
Peak Service Flow (lpm)	538
Backwash Flow (lpm)	269

OPERATING PRESSURES

Min Operating Pressure	240kPa
Max Operating Pressure	700kPa

CONNECTIONS

Inlet/Outlet Connection size	50mm BSPF
Drain Connection Size	50mm BSPF

TEMPERATURE RANGE

5°C - 43°C

WEIGHT

Approximate Operating Weight (kg) 2620

ELECTRICAL

Supply 2 x GPO 240V,10Amp

DIMENSIONS

Overall System Width (A)	2230mm
Overall System Height (B)	2075mm
Overall System Depth (C)	1315mm
Service Clearance (D)	1000mm
Service Clearance (E)	500mm

Disclaimer. Southland Filtration reserves the right to, at any time change any details of design, specifications and performance figures of any published data.

Freecall 1800 656 771
southlandfiltration.com.au

southland
 FILTRATION

D-42-CF


CARBON MEDIA FILTER

Duplex Activated Carbon Filter for High Capacity Service Flow Rate

Reduces Chlorine, chlorine taste and odour. Decreases organic based colour, taste and odour. Lowers pesticides and chemicals.




ACTIVATED CARBON FILTER



FEATURES

- Save time and reduce labour costs with this preassembled kit
- Easy to order with a single product code
- Reduce maintenance costs with the No Unfiltered Water Bypass Valve option
- Choice of different metered control options
- Save on costs with fewer media replacements with separate source backwash option
- Suitable for any site application with flexible Filter configurations
- Reduced downtime with sequential or parallel controls for multiple Filters

PLANS/DRAWINGS

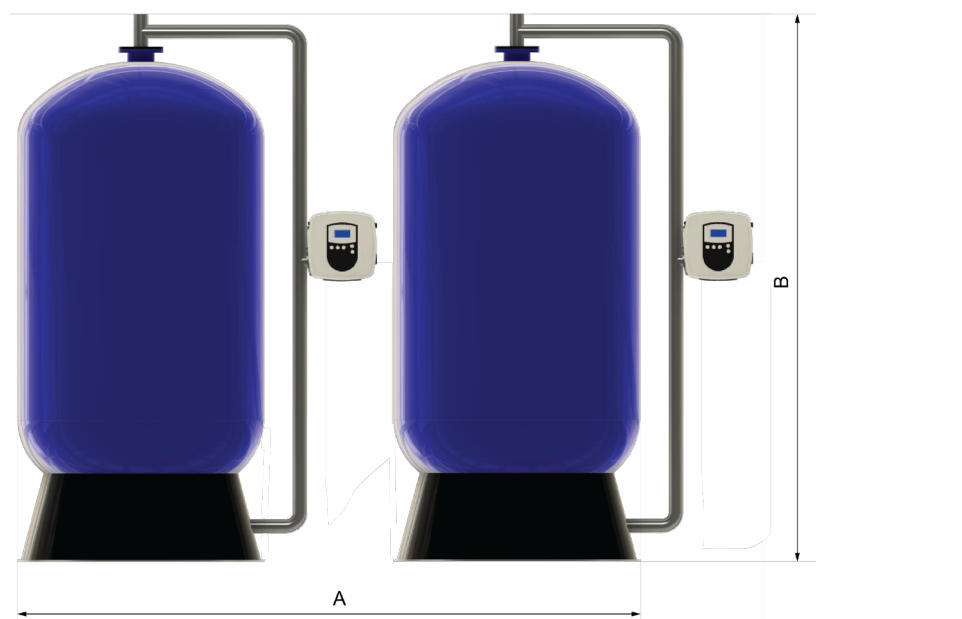

FRONT VIEW

SPECIFICATIONS

PRODUCT CODE

D-42-CF

FLOW RATES

Service Flow (lpm)	366
Peak Service Flow (lpm)	732
Backwash Flow (lpm)	365

OPERATING PRESSURES

Min Operating Pressure	240kPa
Max Operating Pressure	700kPa

CONNECTIONS

Inlet/Outlet Connection size	80mm BSPF
Drain Connection Size	80mm BSPF

TEMPERATURE RANGE

5°C - 43°C

WEIGHT

Approximate Operating Weight (kg) 4270

ELECTRICAL

Supply 2 x GPO 240V,10Amp

DIMENSIONS

Overall System Width (A)	3140mm
Overall System Height (B)	2580mm
Overall System Depth (C)	1670mm
Service Clearance (D)	1000mm
Service Clearance (E)	500mm

Disclaimer. Southland Filtration reserves the right to, at any time change any details of design, specifications and performance figures of any published data.

Freecall 1800 656 771
southlandfiltration.com.au

southland
 FILTRATION

D-48-CF


CARBON MEDIA FILTER

Duplex Activated Carbon Filter for High Capacity Service Flow Rate

Reduces Chlorine, chlorine taste and odour. Decreases organic based colour, taste and odour. Lowers pesticides and chemicals.



ACTIVATED CARBON FILTER



FEATURES

- Save time and reduce labour costs with this preassembled kit
- Easy to order with a single product code
- Reduce maintenance costs with the No Unfiltered Water Bypass Valve option
- Choice of different metered control options
- Save on costs with fewer media replacements with separate source backwash option
- Suitable for any site application with flexible Filter configurations
- Reduced downtime with sequential or parallel controls for multiple Filters

PLANS/DRAWINGS



SPECIFICATIONS

PRODUCT CODE

D-48-CF

FLOW RATES

Service Flow (lpm) 478

Peak Service Flow (lpm) 956

Backwash Flow (lpm) 479

OPERATING PRESSURES

Min Operating Pressure 240kPa

Max Operating Pressure 700kPa

CONNECTIONS

Inlet/Outlet Connection size 80mm BSPF

Drain Connection Size 80mm BSPF

TEMPERATURE RANGE

5°C - 43°C

WEIGHT

Approximate Operating Weight (kg) 5350

ELECTRICAL

Supply 2 x GPO 240V,10Amp

DIMENSIONS

Overall System Width (A) 3440mm

Overall System Height (B) 2580mm

Overall System Depth (C) 1820mm

Service Clearance (D) 1000mm

Service Clearance (E) 500mm

Disclaimer. Southland Filtration reserves the right to, at any time change any details of design, specifications and performance figures of any published data.

Freecall 1800 656 771
southlandfiltration.com.au

southland
FILTRATION

D-63-CF


CARBON MEDIA FILTER

Duplex Activated Carbon Filter for High Capacity Service Flow Rate

Reduces Chlorine, chlorine taste and odour. Decreases organic based colour, taste and odour. Lowers pesticides and chemicals.



ACTIVATED CARBON FILTER



FEATURES

- Save time and reduce labour costs with this preassembled kit
- Easy to order with a single product code
- Reduce maintenance costs with the No Unfiltered Water Bypass Valve option
- Choice of different metered control options
- Save on costs with fewer media replacements with separate source backwash option
- Suitable for any site application with flexible Filter configurations
- Reduced downtime with sequential or parallel controls for multiple Filters

PLANS/DRAWINGS



SPECIFICATIONS

PRODUCT CODE

D-63-CF

FLOW RATES

Service Flow (lpm) 822

Peak Service Flow (lpm) 1644

Backwash Flow (lpm) 821

OPERATING PRESSURES

Min Operating Pressure 240kPa

Max Operating Pressure 700kPa

CONNECTIONS

Inlet/Outlet Connection size 80mm BSPF

Drain Connection Size 80mm BSPF

TEMPERATURE RANGE

5°C - 43°C

WEIGHT

Approximate Operating Weight (kg) 9870

ELECTRICAL

Supply 2 x GPO 240V,10Amp

DIMENSIONS

Overall System Width (A) 4200mm

Overall System Height (B) 3000mm

Overall System Depth (C) 2200mm

Service Clearance (D) 1000mm

Service Clearance (E) 500mm

Disclaimer. Southland Filtration reserves the right to, at any time change any details of design, specifications and performance figures of any published data.

Freecall 1800 656 771
southlandfiltration.com.au

southland
FILTRATION