


# S-09-CF


# CARBON MEDIA FILTER

## Single Activated Carbon Filter

Reduces Chlorine, chlorine taste and odour. Decreases organic based colour, taste, odour, pesticides and chemicals.

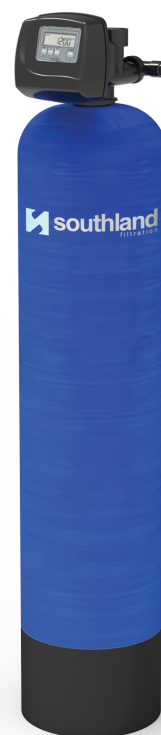


## ACTIVATED CARBON FILTER



## FEATURES

- Save time and reduce labour costs with this preassembled kit
- Easy to order with a single product code
- Reduce maintenance costs with the No Unfiltered Water Bypass Valve option
- Choice of different metered control options
- Save on costs with fewer media replacements with separate source backwash option
- Suitable for any site application with flexible Filter configurations
- Reduced downtime with sequential or parallel controls for multiple Filters

# PLANS/DRAWINGS

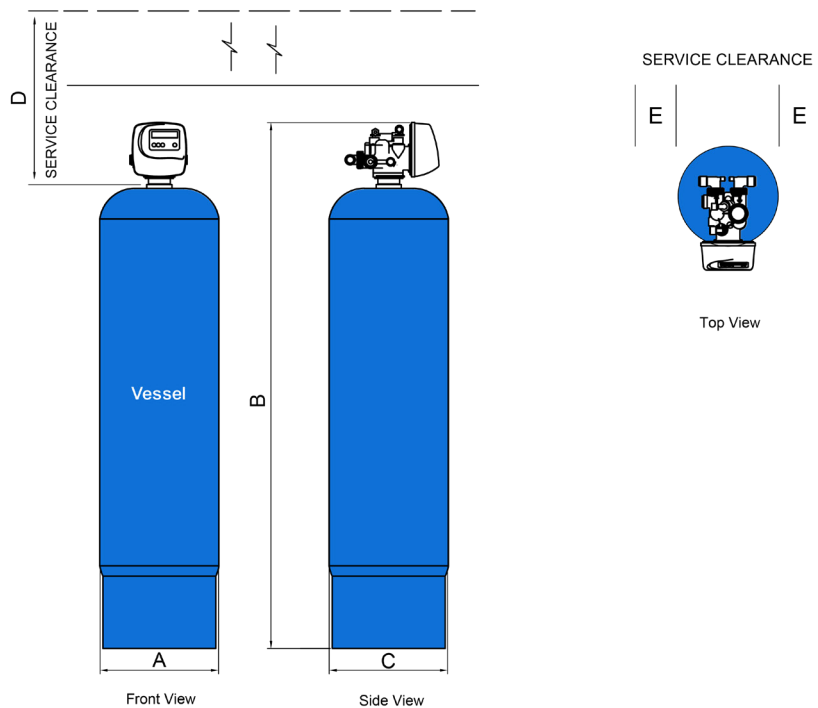

## SPECIFICATIONS

### PRODUCT CODE

S-09-CF

### FLOW RATES

Service Flow (lpm)	8
Peak Service Flow (lpm)	16
Backwash Flow (lpm)	16

### OPERATING PRESSURES

Min Operating Pressure	240kPa
Max Operating Pressure	700kPa

### CONNECTIONS

Inlet/Outlet Connection size	25mm BSPM
Drain Connection Size	19mm Hose Barb

### TEMPERATURE RANGE

5°C - 43°C

### WEIGHT

Approximate Operating Weight (kg) 60

### ELECTRICAL

Supply 1 x GPO 240V,10Amp

### DIMENSIONS

Overall System Width (A)	385mm
Overall System Height (B)	1470mm
Overall System Depth (C)	385mm
Service Clearance (D)	500mm
Service Clearance (E)	500mm

Disclaimer. Southland Filtration reserves the right to, at any time change any details of design, specifications and performance figures of any published data.

Freecall 1800 656 771  
[southlandfiltration.com.au](http://southlandfiltration.com.au)


**southland**  
 FILTRATION

# S-10-CF


# CARBON MEDIA FILTER

## Single Activated Carbon Filter

Reduces Chlorine, chlorine taste and odour. Decreases organic based colour, taste, odour, pesticides and chemicals.

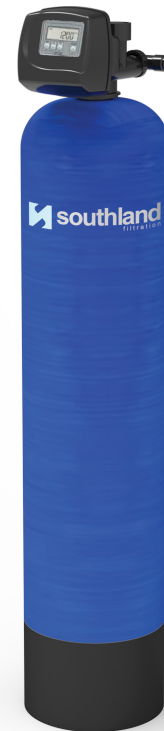


## ACTIVATED CARBON FILTER



## FEATURES

- Save time and reduce labour costs with this preassembled kit
- Easy to order with a single product code
- Reduce maintenance costs with the No Unfiltered Water Bypass Valve option
- Choice of different metered control options
- Save on costs with fewer media replacements with separate source backwash option
- Suitable for any site application with flexible Filter configurations
- Reduced downtime with sequential or parallel controls for multiple Filters

# PLANS/DRAWINGS

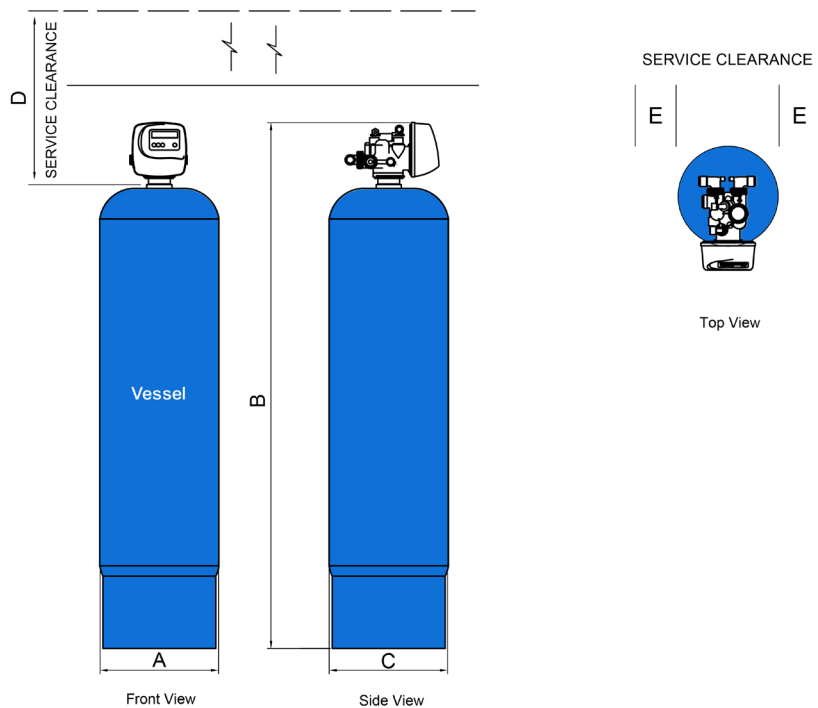

# SPECIFICATIONS

## PRODUCT CODE

S-10-CF

## FLOW RATES

Service Flow (lpm) 10

Peak Service Flow (lpm) 20

Backwash Flow (lpm) 20

## OPERATING PRESSURES

Min Operating Pressure 240kPa

Max Operating Pressure 700kPa

## CONNECTIONS

Inlet/Outlet Connection size 25mm BSPM

Drain Connection Size 19mm Hose Barb

## TEMPERATURE RANGE

5°C - 43°C

## WEIGHT

Approximate Operating Weight (kg) 85

## ELECTRICAL

Supply 1 x GPO 240V,10Amp

## DIMENSIONS

Overall System Width (A) 400mm

Overall System Height (B) 1625mm

Overall System Depth (C) 400mm

Service Clearance (D) 500mm

Service Clearance (E) 500mm

Disclaimer. Southland Filtration reserves the right to, at any time change any details of design, specifications and performance figures of any published data.

Freecall 1800 656 771  
[southlandfiltration.com.au](http://southlandfiltration.com.au)

**southland**  
 FILTRATION

# S-12-CF


# CARBON MEDIA FILTER

## Single Activated Carbon Filter

Reduces Chlorine, chlorine taste and odour. Decreases organic based colour, taste, odour, pesticides and chemicals.




## ACTIVATED CARBON FILTER



## FEATURES

- Save time and reduce labour costs with this preassembled kit
- Easy to order with a single product code
- Reduce maintenance costs with the No Unfiltered Water Bypass Valve option
- Choice of different metered control options
- Save on costs with fewer media replacements with separate source backwash option
- Suitable for any site application with flexible Filter configurations
- Reduced downtime with sequential or parallel controls for multiple Filters

# PLANS/DRAWINGS

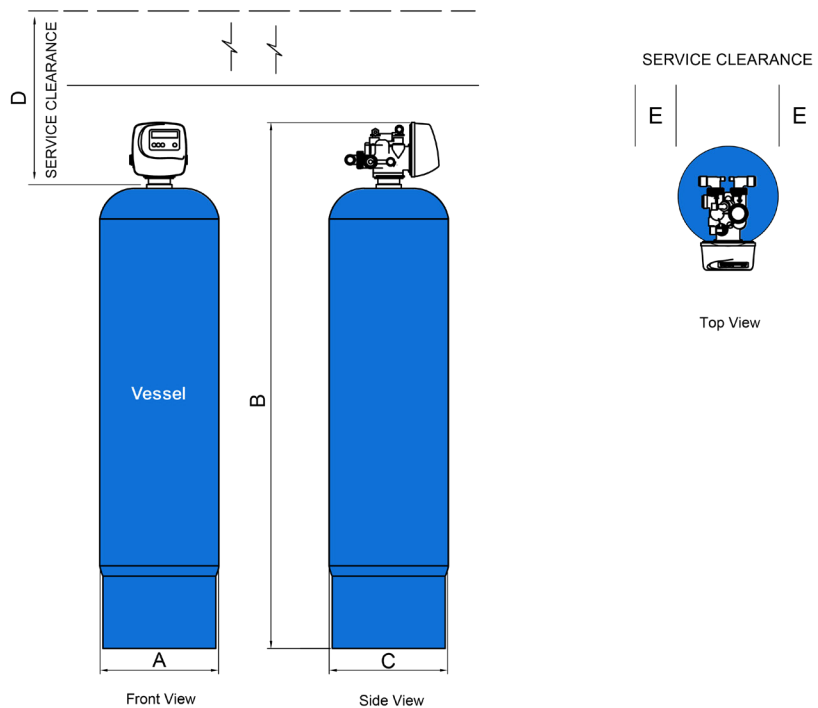

# SPECIFICATIONS

## PRODUCT CODE

S-12-CF

## FLOW RATES

Service Flow (lpm) 15

Peak Service Flow (lpm) 30

Backwash Flow (lpm) 28

## OPERATING PRESSURES

Min Operating Pressure 240kPa

Max Operating Pressure 700kPa

## CONNECTIONS

Inlet/Outlet Connection size 25mm BSPM

Drain Connection Size 19mm Hose Barb

## TEMPERATURE RANGE

5°C - 43°C

## WEIGHT

Approximate Operating Weight (kg) 110

## ELECTRICAL

Supply 1 x GPO 240V,10Amp

## DIMENSIONS

Overall System Width (A) 455mm

Overall System Height (B) 1575mm

Overall System Depth (C) 455mm

Service Clearance (D) 500mm

Service Clearance (E) 500mm

Disclaimer. Southland Filtration reserves the right to, at any time change any details of design, specifications and performance figures of any published data.

Freecall 1800 656 771  
[southlandfiltration.com.au](http://southlandfiltration.com.au)

**southland**  
 FILTRATION

# S-13-CF


# CARBON MEDIA FILTER

## Single Activated Carbon Filter

Reduces Chlorine, chlorine taste and odour. Decreases organic based colour, taste, odour, pesticides and chemicals.




## ACTIVATED CARBON FILTER



## FEATURES

- Save time and reduce labour costs with this preassembled kit
- Easy to order with a single product code
- Reduce maintenance costs with the No Unfiltered Water Bypass Valve option
- Choice of different metered control options
- Save on costs with fewer media replacements with separate source backwash option
- Suitable for any site application with flexible Filter configurations
- Reduced downtime with sequential or parallel controls for multiple Filters

# PLANS/DRAWINGS

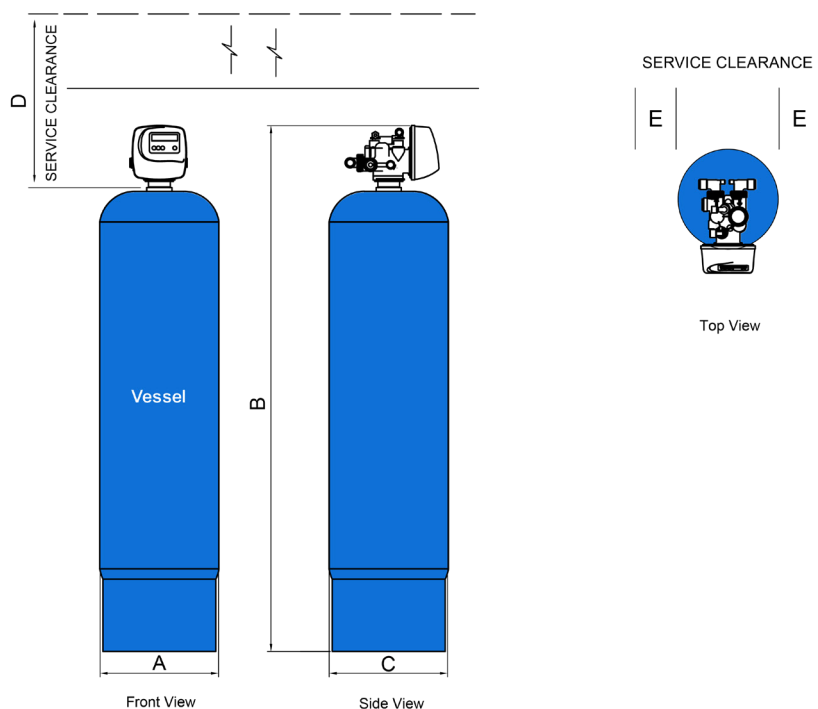

## SPECIFICATIONS

### PRODUCT CODE

S-13-CF

### FLOW RATES

Service Flow (lpm)	18
Peak Service Flow (lpm)	36
Backwash Flow (lpm)	34

### OPERATING PRESSURES

Min Operating Pressure	240kPa
Max Operating Pressure	700kPa

### CONNECTIONS

Inlet/Outlet Connection size	25mm BSPM
Drain Connection Size	19mm Hose Barb

### TEMPERATURE RANGE

5°C - 43°C

### WEIGHT

Approximate Operating Weight (kg) 130

### ELECTRICAL

Supply 1 x GPO 240V,10Amp

### DIMENSIONS

Overall System Width (A)	480mm
Overall System Height (B)	1635mm
Overall System Depth (C)	480mm
Service Clearance (D)	500mm
Service Clearance (E)	500mm

Disclaimer. Southland Filtration reserves the right to, at any time change any details of design, specifications and performance figures of any published data.

Freecall 1800 656 771  
[southlandfiltration.com.au](http://southlandfiltration.com.au)

**southland**  
 FILTRATION




# S-14-CF


# CARBON MEDIA FILTER

## Single Activated Carbon Filter

Reduces Chlorine, chlorine taste and odour. Decreases organic based colour, taste, odour, pesticides and chemicals.

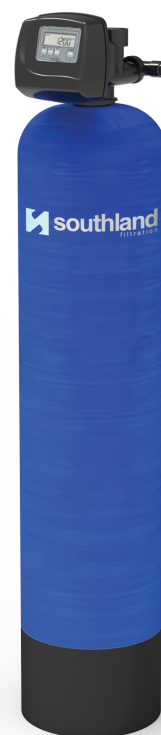


## ACTIVATED CARBON FILTER



## FEATURES

- Save time and reduce labour costs with this preassembled kit
- Easy to order with a single product code
- Reduce maintenance costs with the No Unfiltered Water Bypass Valve option
- Choice of different metered control options
- Save on costs with fewer media replacements with separate source backwash option
- Suitable for any site application with flexible Filter configurations
- Reduced downtime with sequential or parallel controls for multiple Filters

# PLANS/DRAWINGS

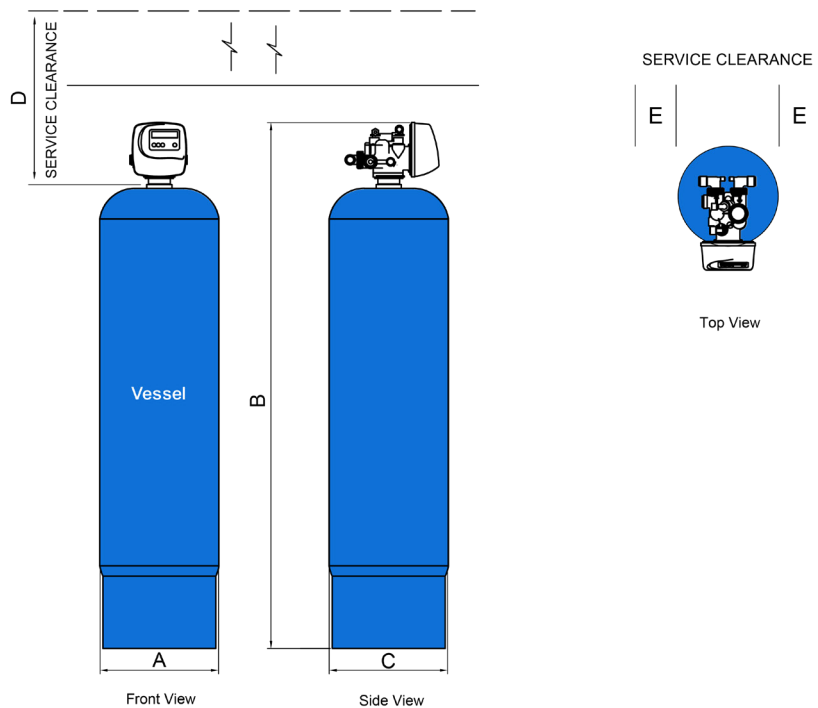

# SPECIFICATIONS

## PRODUCT CODE

S-14-CF

## FLOW RATES

Service Flow (lpm)	20
Peak Service Flow (lpm)	40
Backwash Flow (lpm)	41

## OPERATING PRESSURES

Min Operating Pressure	240kPa
Max Operating Pressure	700kPa

## CONNECTIONS

Inlet/Outlet Connection size	32mm BSPM
Drain Connection Size	25mm Hose Barb

## TEMPERATURE RANGE

5°C - 43°C

## WEIGHT

Approximate Operating Weight (kg) 185

## ELECTRICAL

Supply 1 x GPO 240V,10Amp

## DIMENSIONS

Overall System Width (A)	510mm
Overall System Height (B)	1910mm
Overall System Depth (C)	510mm
Service Clearance (D)	500mm
Service Clearance (E)	500mm

Disclaimer. Southland Filtration reserves the right to, at any time change any details of design, specifications and performance figures of any published data.

Freecall 1800 656 771  
[southlandfiltration.com.au](http://southlandfiltration.com.au)

**southland**  
 FILTRATION

# **S-16-CF**


# **CARBON MEDIA FILTER**

## **Single Activated Carbon Filter**

Reduces Chlorine, chlorine taste and odour. Decreases organic based colour, taste, odour, pesticides and chemicals.




## **ACTIVATED CARBON FILTER**



## **FEATURES**

- Save time and reduce labour costs with this preassembled kit
- Easy to order with a single product code
- Reduce maintenance costs with the No Unfiltered Water Bypass Valve option
- Choice of different metered control options
- Save on costs with fewer media replacements with separate source backwash option
- Suitable for any site application with flexible Filter configurations
- Reduced downtime with sequential or parallel controls for multiple Filters

# PLANS/DRAWINGS

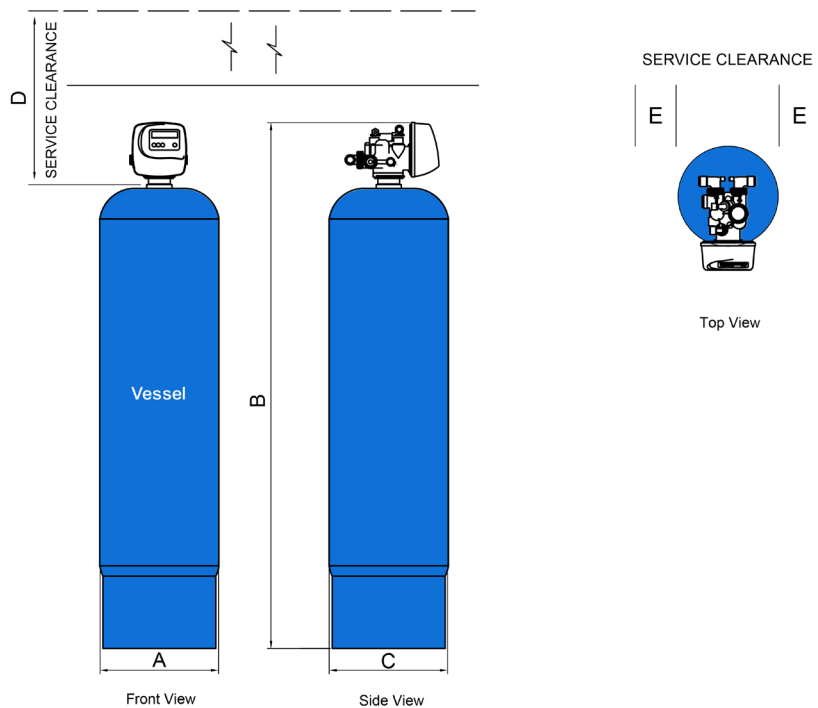

# SPECIFICATIONS

## PRODUCT CODE

S-16-CF

## FLOW RATES

Service Flow (lpm)	26
Peak Service Flow (lpm)	53
Backwash Flow (lpm)	56

## OPERATING PRESSURES

Min Operating Pressure	240kPa
Max Operating Pressure	700kPa

## CONNECTIONS

Inlet/Outlet Connection size	32mm BSPM
Drain Connection Size	25mm Hose Barb

## TEMPERATURE RANGE

5°C - 43°C

## WEIGHT

Approximate Operating Weight (kg) 250

## ELECTRICAL

Supply 1 x GPO 240V,10Amp

## DIMENSIONS

Overall System Width (A)	610mm
Overall System Height (B)	2000mm
Overall System Depth (C)	610mm
Service Clearance (D)	500mm
Service Clearance (E)	500mm

Disclaimer. Southland Filtration reserves the right to, at any time change any details of design, specifications and performance figures of any published data.

Freecall 1800 656 771  
[southlandfiltration.com.au](http://southlandfiltration.com.au)

**southland**  
 FILTRATION

# S-18-CF


# CARBON MEDIA FILTER

## Single Activated Carbon Filter

Reduces Chlorine, chlorine taste and odour. Decreases organic based colour, taste, odour, pesticides and chemicals.




## ACTIVATED CARBON FILTER



## FEATURES

- Save time and reduce labour costs with this preassembled kit
- Easy to order with a single product code
- Reduce maintenance costs with the No Unfiltered Water Bypass Valve option
- Choice of different metered control options
- Save on costs with fewer media replacements with separate source backwash option
- Suitable for any site application with flexible Filter configurations
- Reduced downtime with sequential or parallel controls for multiple Filters

# PLANS/DRAWINGS

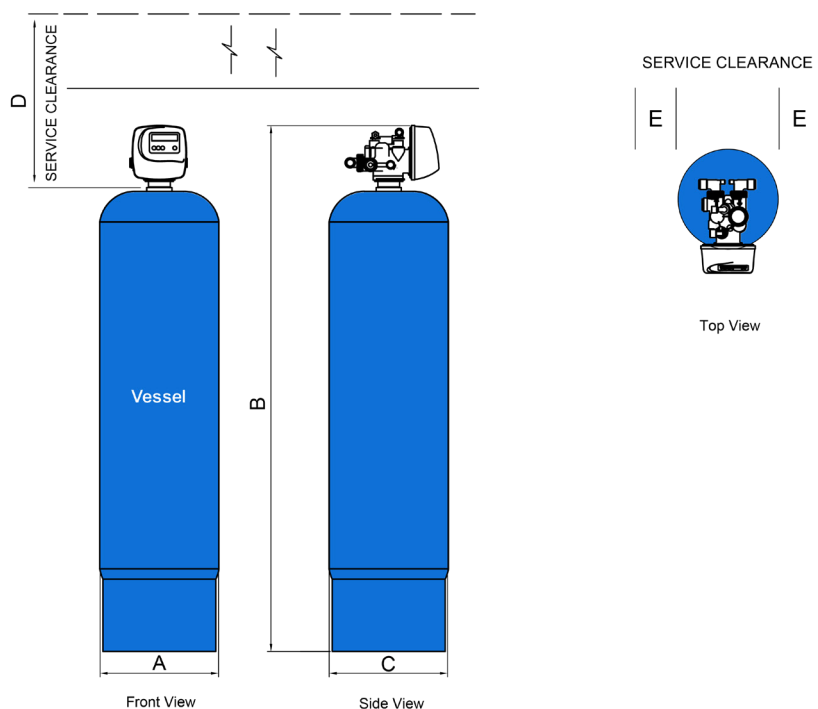

# SPECIFICATIONS

## PRODUCT CODE

S-18-CF

## FLOW RATES

Service Flow (lpm)	33
Peak Service Flow (lpm)	67
Backwash Flow (lpm)	66

## OPERATING PRESSURES

Min Operating Pressure	240kPa
Max Operating Pressure	700kPa

## CONNECTIONS

Inlet/Outlet Connection size	40mm BSPF
Drain Connection Size	40mm BSPF

## TEMPERATURE RANGE

5°C - 43°C

## WEIGHT

Approximate Operating Weight (kg) 355

## ELECTRICAL

Supply 1 x GPO 240V,10Amp

## DIMENSIONS

Overall System Width (A)	660mm
Overall System Height (B)	2100mm
Overall System Depth (C)	660mm
Service Clearance (D)	1000mm
Service Clearance (E)	500mm

Disclaimer. Southland Filtration reserves the right to, at any time change any details of design, specifications and performance figures of any published data.

Freecall 1800 656 771  
[southlandfiltration.com.au](http://southlandfiltration.com.au)

**southland**  
 FILTRATION

# S-21-CF


# CARBON MEDIA FILTER

## Single Activated Carbon Filter

Reduces Chlorine, chlorine taste and odour. Decreases organic based colour, taste, odour, pesticides and chemicals.




## ACTIVATED CARBON FILTER



## FEATURES

- Save time and reduce labour costs with this preassembled kit
- Easy to order with a single product code
- Reduce maintenance costs with the No Unfiltered Water Bypass Valve option
- Choice of different metered control options
- Save on costs with fewer media replacements with separate source backwash option
- Suitable for any site application with flexible Filter configurations
- Reduced downtime with sequential or parallel controls for multiple Filters

# PLANS/DRAWINGS

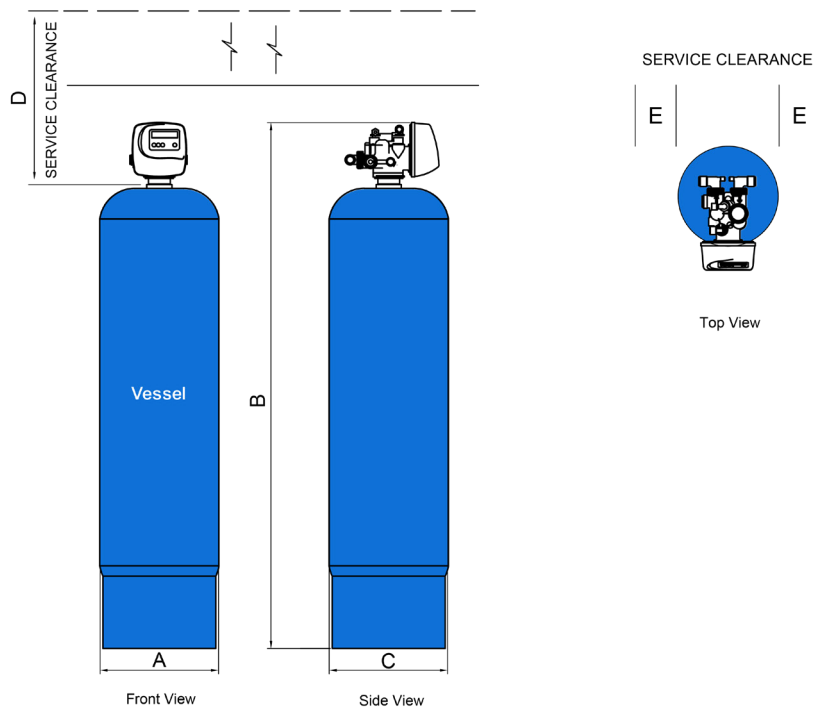

## SPECIFICATIONS

### PRODUCT CODE

S-21-CF

### FLOW RATES

Service Flow (lpm)	45
Peak Service Flow (lpm)	91
Backwash Flow (lpm)	92

### OPERATING PRESSURES

Min Operating Pressure	240kPa
Max Operating Pressure	700kPa

### CONNECTIONS

Inlet/Outlet Connection size	40mm BSPF
Drain Connection Size	40mm BSPF

### TEMPERATURE RANGE

5°C - 43°C

### WEIGHT

Approximate Operating Weight (kg) 450

### ELECTRICAL

Supply 1 x GPO 240V,10Amp

### DIMENSIONS

Overall System Width (A)	735mm
Overall System Height (B)	2100mm
Overall System Depth (C)	735mm
Service Clearance (D)	1000mm
Service Clearance (E)	500mm

Disclaimer. Southland Filtration reserves the right to, at any time change any details of design, specifications and performance figures of any published data.

Freecall 1800 656 771  
[southlandfiltration.com.au](http://southlandfiltration.com.au)

**southland**  
 FILTRATION



# S-24-CF


# CARBON MEDIA FILTER

## Single Activated Carbon Filter

Reduces Chlorine, chlorine taste and odour. Decreases organic based colour, taste, odour, pesticides and chemicals.




## ACTIVATED CARBON FILTER



## FEATURES

- Save time and reduce labour costs with this preassembled kit
- Easy to order with a single product code
- Reduce maintenance costs with the No Unfiltered Water Bypass Valve option
- Choice of different metered control options
- Save on costs with fewer media replacements with separate source backwash option
- Suitable for any site application with flexible Filter configurations
- Reduced downtime with sequential or parallel controls for multiple Filters

# PLANS/DRAWINGS

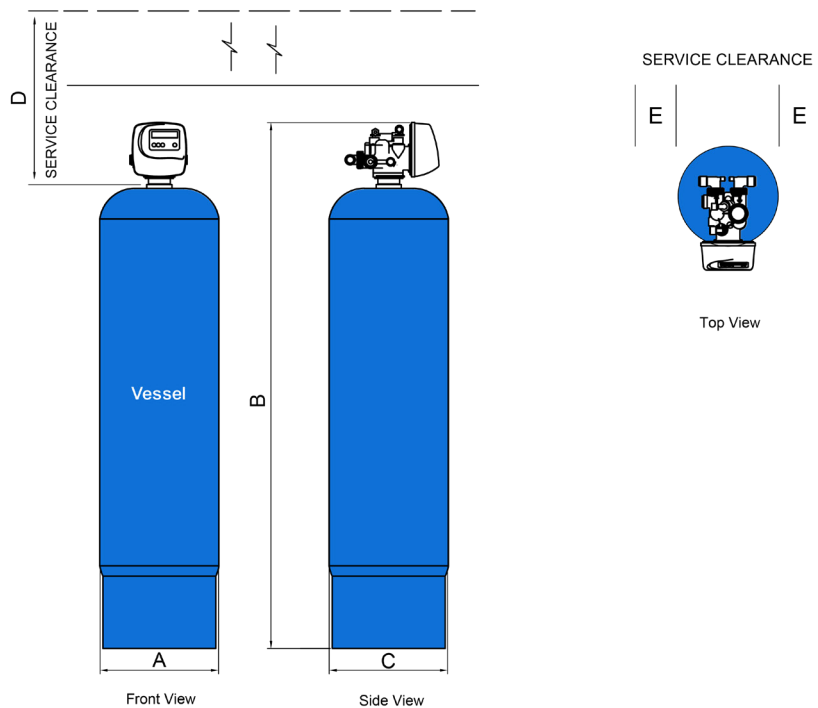

# SPECIFICATIONS

## PRODUCT CODE

S-24-CF

## FLOW RATES

Service Flow (lpm)	59
Peak Service Flow (lpm)	119
Backwash Flow (lpm)	119

## OPERATING PRESSURES

Min Operating Pressure	240kPa
Max Operating Pressure	700kPa

## CONNECTIONS

Inlet/Outlet Connection size	50mm BSPF
Drain Connection Size	50mm BSPF

## TEMPERATURE RANGE

5°C - 43°C

## WEIGHT

Approximate Operating Weight (kg) 615

## ELECTRICAL

Supply 1 x GPO 240V,10Amp

## DIMENSIONS

Overall System Width (A)	810mm
Overall System Height (B)	2250mm
Overall System Depth (C)	810mm
Service Clearance (D)	1000mm
Service Clearance (E)	500mm

Disclaimer. Southland Filtration reserves the right to, at any time change any details of design, specifications and performance figures of any published data.

Freecall 1800 656 771  
[southlandfiltration.com.au](http://southlandfiltration.com.au)

**southland**  
 FILTRATION

# **S-30-CF**


# **CARBON MEDIA FILTER**

## **Single Activated Carbon Filter**

Reduces Chlorine, chlorine taste and odour. Decreases organic based colour, taste, odour, pesticides and chemicals.




## **ACTIVATED CARBON FILTER**



## **FEATURES**

- Save time and reduce labour costs with this preassembled kit
- Easy to order with a single product code
- Reduce maintenance costs with the No Unfiltered Water Bypass Valve option
- Choice of different metered control options
- Save on costs with fewer media replacements with separate source backwash option
- Suitable for any site application with flexible Filter configurations
- Reduced downtime with sequential or parallel controls for multiple Filters

# PLANS/DRAWINGS

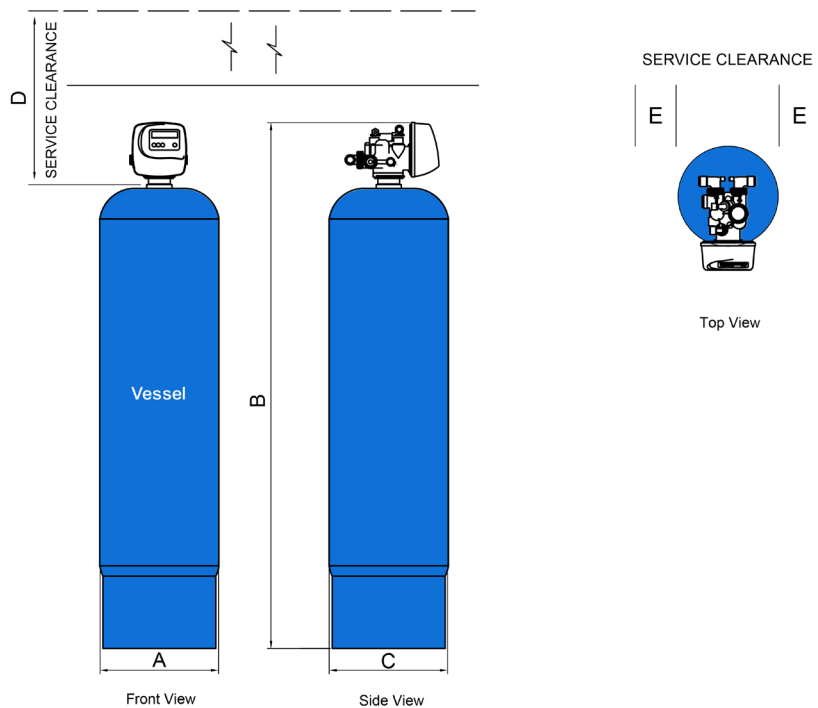

# SPECIFICATIONS

## PRODUCT CODE

S-30-CF

## FLOW RATES

Service Flow (lpm) 93

Peak Service Flow (lpm) 187

Backwash Flow (lpm) 186

## OPERATING PRESSURES

Min Operating Pressure 240kPa

Max Operating Pressure 700kPa

## CONNECTIONS

Inlet/Outlet Connection size 50mm BSPF

Drain Connection Size 50mm BSPF

## TEMPERATURE RANGE

5°C - 43°C

## WEIGHT

Approximate Operating Weight (kg) 945

## ELECTRICAL

Supply 1 x GPO 240V,10Amp

## DIMENSIONS

Overall System Width (A) 970mm

Overall System Height (B) 2200mm

Overall System Depth (C) 970mm

Service Clearance (D) 1000mm

Service Clearance (E) 500mm

Disclaimer. Southland Filtration reserves the right to, at any time change any details of design, specifications and performance figures of any published data.

Freecall 1800 656 771  
[southlandfiltration.com.au](http://southlandfiltration.com.au)

**southland**  
 FILTRATION

# **S-36-CF**


# **CARBON MEDIA FILTER**

## **Single Activated Carbon Filter**

Reduces Chlorine, chlorine taste and odour. Decreases organic based colour, taste, odour, pesticides and chemicals.




## **ACTIVATED CARBON FILTER**



## **FEATURES**

- Save time and reduce labour costs with this preassembled kit
- Easy to order with a single product code
- Reduce maintenance costs with the No Unfiltered Water Bypass Valve option
- Choice of different metered control options
- Save on costs with fewer media replacements with separate source backwash option
- Suitable for any site application with flexible Filter configurations
- Reduced downtime with sequential or parallel controls for multiple Filters

# PLANS/DRAWINGS

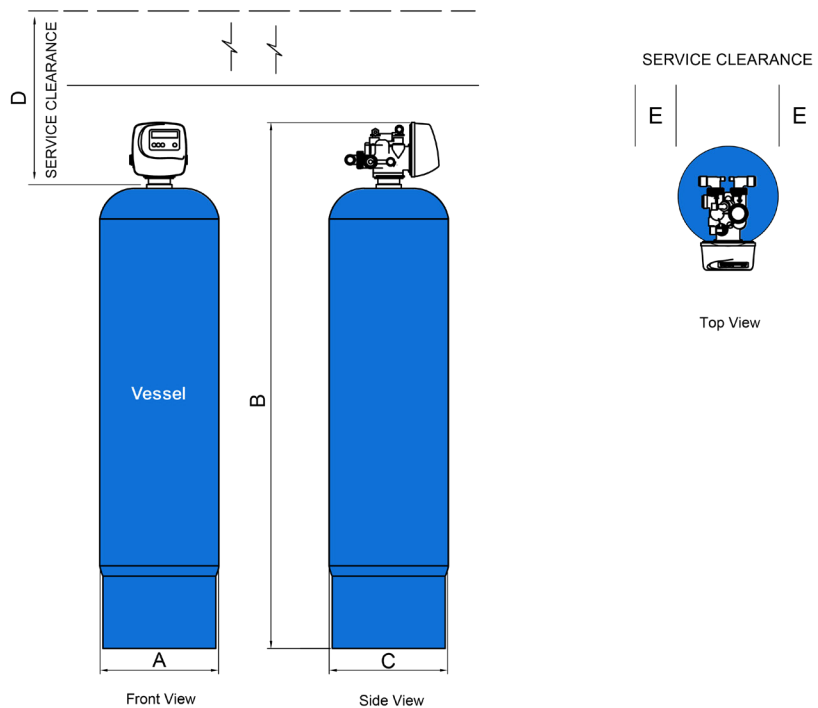

# SPECIFICATIONS

## PRODUCT CODE

S-36-CF

## FLOW RATES

Service Flow (lpm)	134
Peak Service Flow (lpm)	269
Backwash Flow (lpm)	269

## OPERATING PRESSURES

Min Operating Pressure	240kPa
Max Operating Pressure	700kPa

## CONNECTIONS

Inlet/Outlet Connection size	50mm BSPF
Drain Connection Size	50mm BSPF

## TEMPERATURE RANGE

5°C - 43°C

## WEIGHT

Approximate Operating Weight (kg) 1310

## ELECTRICAL

Supply 1 x GPO 240V,10Amp

## DIMENSIONS

Overall System Width (A)	1115mm
Overall System Height (B)	2300mm
Overall System Depth (C)	1115mm
Service Clearance (D)	1000mm
Service Clearance (E)	500mm

Disclaimer. Southland Filtration reserves the right to, at any time change any details of design, specifications and performance figures of any published data.

Freecall 1800 656 771  
[southlandfiltration.com.au](http://southlandfiltration.com.au)

**southland**  
 FILTRATION

# S-42-CF


# CARBON MEDIA FILTER

## Single Activated Carbon Filter

Reduces Chlorine, chlorine taste and odour. Decreases organic based colour, taste, odour, pesticides and chemicals.



## ACTIVATED CARBON FILTER




## FEATURES

- Save time and reduce labour costs with this preassembled kit
- Easy to order with a single product code
- Reduce maintenance costs with the No Unfiltered Water Bypass Valve option
- Choice of different metered control options
- Save on costs with fewer media replacements with separate source backwash option
- Suitable for any site application with flexible Filter configurations
- Reduced downtime with sequential or parallel controls for multiple Filters

Freecall 1800 656 771  
[southlandfiltration.com.au](http://southlandfiltration.com.au)

# PLANS/DRAWINGS

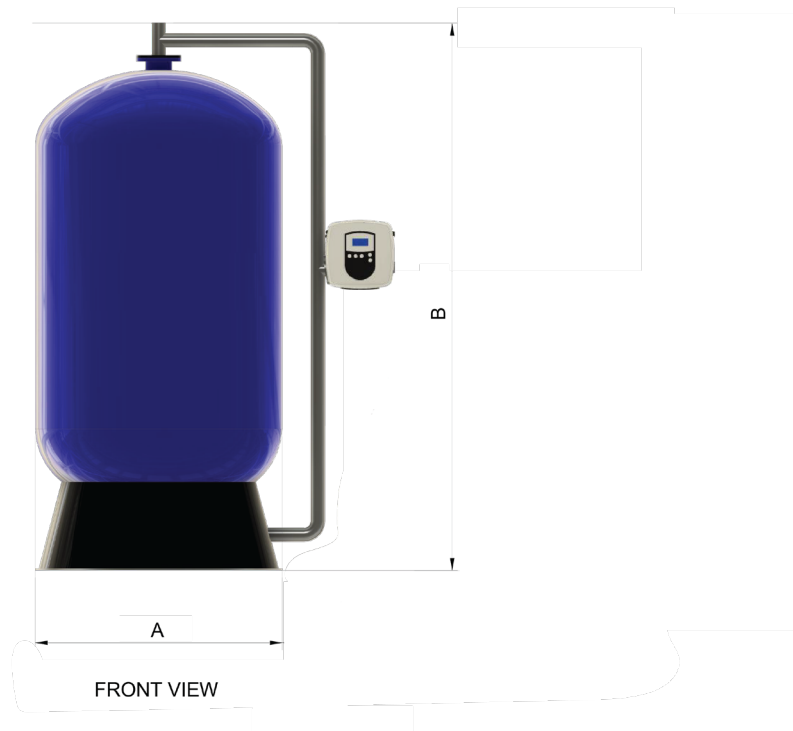

## SPECIFICATIONS

### PRODUCT CODE

S-42-CF

### FLOW RATES

Service Flow (lpm)	183
Peak Service Flow (lpm)	366
Backwash Flow (lpm)	365

### OPERATING PRESSURES

Min Operating Pressure	240kPa
Max Operating Pressure	700kPa

### CONNECTIONS

Inlet/Outlet Connection size	80mm BSPF
Drain Connection Size	80mm BSPF

### TEMPERATURE RANGE

5°C - 43°C

### WEIGHT

Approximate Operating Weight (kg) 2135

### ELECTRICAL

Supply 1 x GPO 240V,10Amp

### DIMENSIONS

Overall System Width (A)	1570mm
Overall System Height (B)	2900mm
Overall System Depth (C)	1270mm
Service Clearance (D)	1000mm
Service Clearance (E)	500mm

Disclaimer. Southland Filtration reserves the right to, at any time change any details of design, specifications and performance figures of any published data.

Freecall 1800 656 771  
[southlandfiltration.com.au](http://southlandfiltration.com.au)

**southland**  
 FILTRATION



# S-48-CF


# CARBON MEDIA FILTER

## Single Activated Carbon Filter

Reduces Chlorine, chlorine taste and odour. Decreases organic based colour, taste, odour, pesticides and chemicals.



## ACTIVATED CARBON FILTER



## FEATURES

- Save time and reduce labour costs with this preassembled kit
- Easy to order with a single product code
- Reduce maintenance costs with the No Unfiltered Water Bypass Valve option
- Choice of different metered control options
- Save on costs with fewer media replacements with separate source backwash option
- Suitable for any site application with flexible Filter configurations
- Reduced downtime with sequential or parallel controls for multiple Filters

# PLANS/DRAWINGS



FRONT VIEW

## SPECIFICATIONS

### PRODUCT CODE

S-48-CF

### FLOW RATES

Service Flow (lpm)	239
Peak Service Flow (lpm)	478
Backwash Flow (lpm)	479

### OPERATING PRESSURES

Min Operating Pressure	240kPa
Max Operating Pressure	700kPa

### CONNECTIONS

Inlet/Outlet Connection size	80mm BSPF
Drain Connection Size	80mm BSPF

### TEMPERATURE RANGE

5°C - 43°C

### WEIGHT

Approximate Operating Weight (kg) 2675

### ELECTRICAL

Supply 1 x GPO 240V,10Amp

### DIMENSIONS

Overall System Width (A)	1720mm
Overall System Height (B)	2900mm
Overall System Depth (C)	1420mm
Service Clearance (D)	1000mm
Service Clearance (E)	500mm

Disclaimer. Southland Filtration reserves the right to, at any time change any details of design, specifications and performance figures of any published data.

Freecall 1800 656 771  
[southlandfiltration.com.au](http://southlandfiltration.com.au)

**southland**  
 FILTRATION

# S-63-CF


## CARBON MEDIA FILTER

### Single Activated Carbon Filter

Reduces Chlorine, chlorine taste and odour. Decreases organic based colour, taste, odour, pesticides and chemicals.



### ACTIVATED CARBON FILTER



## FEATURES

- Save time and reduce labour costs with this preassembled kit
- Easy to order with a single product code
- Reduce maintenance costs with the No Unfiltered Water Bypass Valve option
- Choice of different metered control options
- Save on costs with fewer media replacements with separate source backwash option
- Suitable for any site application with flexible Filter configurations
- Reduced downtime with sequential or parallel controls for multiple Filters

# PLANS/DRAWINGS



## SPECIFICATIONS

### PRODUCT CODE

S-63-CF

### FLOW RATES

Service Flow (lpm) 411

Peak Service Flow (lpm) 822

Backwash Flow (lpm) 821

### OPERATING PRESSURES

Min Operating Pressure 240kPa

Max Operating Pressure 700kPa

### CONNECTIONS

Inlet/Outlet Connection size 80mm BSPF

Drain Connection Size 80mm BSPF

### TEMPERATURE RANGE

5°C - 43°C

### WEIGHT

Approximate Operating Weight (kg) 4935

### ELECTRICAL

Supply 1 x GPO 240V,10Amp

### DIMENSIONS

Overall System Width (A) 2100mm

Overall System Height (B) 3000mm

Overall System Depth (C) 1800mm

Service Clearance (D) 1000mm

Service Clearance (E) 500mm

Disclaimer. Southland Filtration reserves the right to, at any time change any details of design, specifications and performance figures of any published data.

Freecall 1800 656 771  
[southlandfiltration.com.au](http://southlandfiltration.com.au)

**southland**  
FILTRATION