

D-09-GF


GLASS MEDIA FILTER

Duplex Glass AFM Media Filter for High Capacity Service Flow Rate

Sediment particle filtration to as low as 1 micron, removing hydrocarbons, organics and microplastics.




GLASS MEDIA FILTER



FEATURES

- Save time and reduce labour costs with this preassembled kit
- Easy to order with a single product code
- Reduce equipment maintenance costs with the No Unfiltered Water Bypass Valve option
- Choice of different metered control options
- Save on costs with fewer media replacements with separate source backwash option
- Suitable for any site application with flexible filter configurations
- Reduced downtime with sequential or parallel controls for multiple filters

PLANS/DRAWINGS

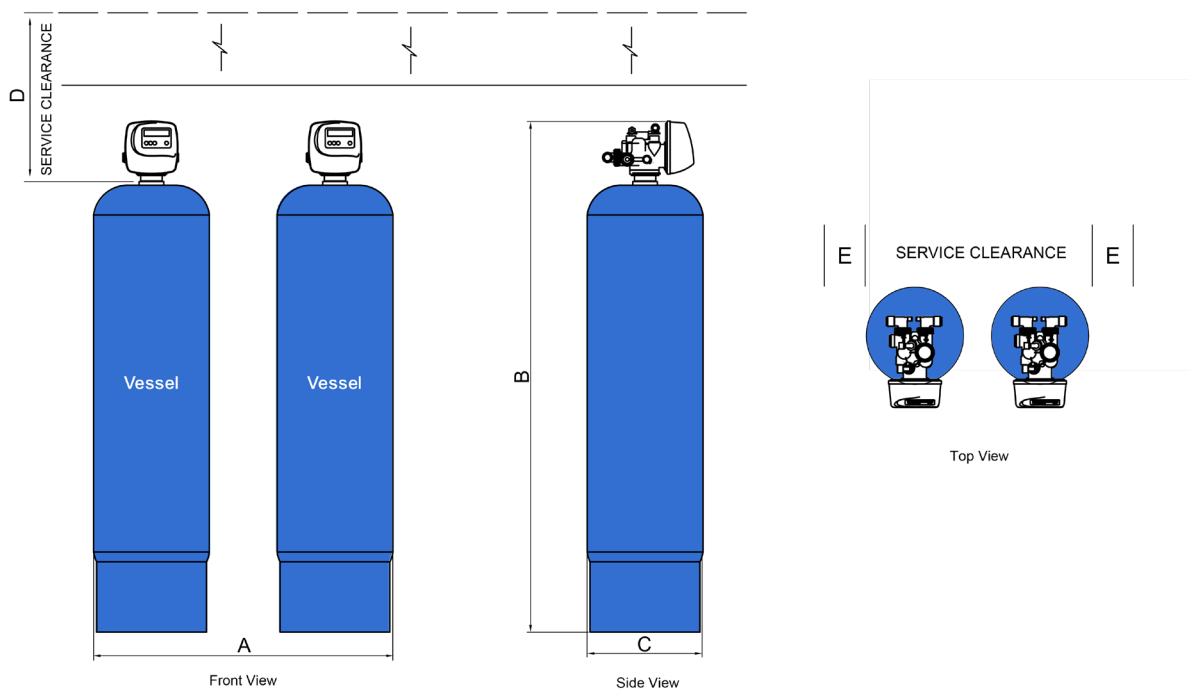

SPECIFICATIONS

PRODUCT CODE

D-09-GF

FLOW RATES

Service Flow (lpm)	12
Peak Service Flow (lpm)	26
Backwash Flow (lpm)	20

OPERATING PRESSURES

Min Operating Pressure	240kPa
Max Operating Pressure	700kPa

CONNECTIONS

Inlet/Outlet Connection size	25mm BSPM
Drain Connection Size	19mm Hose Barb

TEMPERATURE RANGE

5°C - 43°C

WEIGHT

Approximate Operating Weight (kg) 150

ELECTRICAL

Supply 2 x GPO 240V,10Amp

DIMENSIONS

Overall System Width (A)	770mm
Overall System Height (B)	1470mm
Overall System Depth (C)	585mm
Service Clearance (D)	500mm
Service Clearance (E)	500mm

Disclaimer. Southland Filtration reserves the right to, at any time change any details of design, specifications and performance figures of any published data.

Freecall 1800 656 771
southlandfiltration.com.au

southland
 FILTRATION

D-10-GF


GLASS MEDIA FILTER

Duplex Glass AFM Media Filter for High Capacity Service Flow Rate

Sediment particle filtration to
as low as 1 micron, removing
hydrocarbons, organics and
microplastics.




GLASS MEDIA FILTER



FEATURES

- Save time and reduce labour costs with this preassembled kit
- Easy to order with a single product code
- Reduce equipment maintenance costs with the No Unfiltered Water Bypass Valve option
- Choice of different metered control options
- Save on costs with fewer media replacements with separate source backwash option
- Suitable for any site application with flexible filter configurations
- Reduced downtime with sequential or parallel controls for multiple filters

PLANS/DRAWINGS

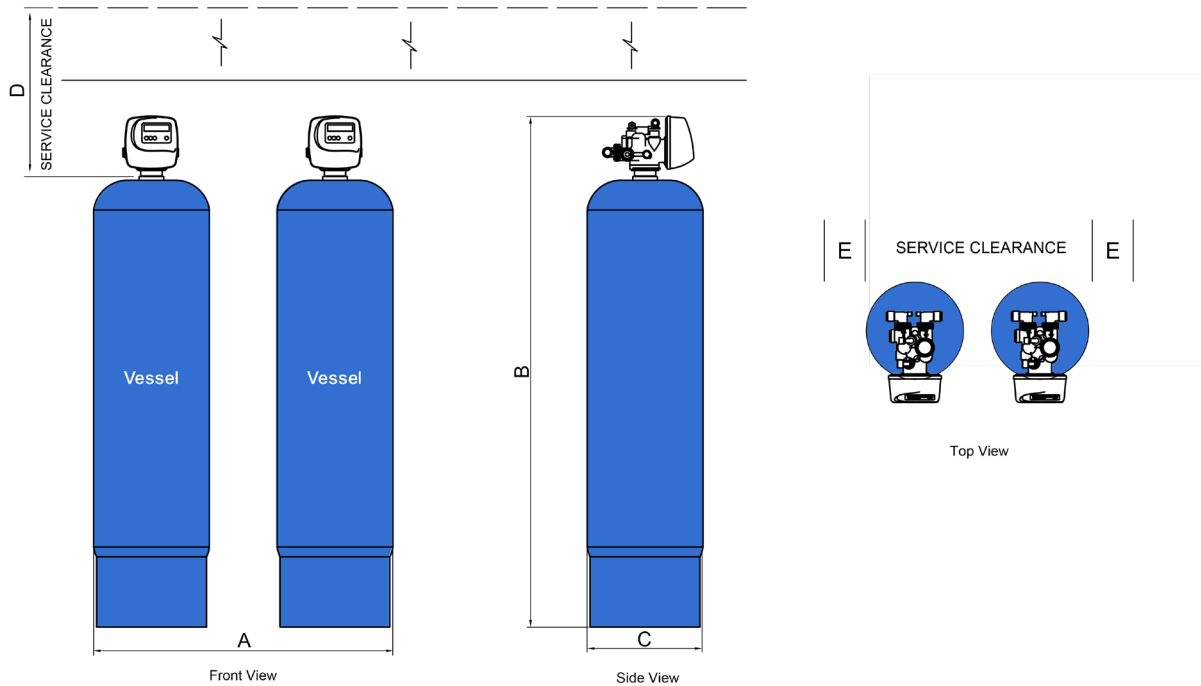

SPECIFICATIONS

PRODUCT CODE

D-10-GF

FLOW RATES

Service Flow (lpm)	16
Peak Service Flow (lpm)	34
Backwash Flow (lpm)	25

OPERATING PRESSURES

Min Operating Pressure	240kPa
Max Operating Pressure	700kPa

CONNECTIONS

Inlet/Outlet Connection size	25mm BSPM
Drain Connection Size	19mm Hose Barb

TEMPERATURE RANGE

5°C - 43°C

WEIGHT

Approximate Operating Weight (kg) 210

ELECTRICAL

Supply 2 x GPO 240V,10Amp

DIMENSIONS

Overall System Width (A)	800mm
Overall System Height (B)	1575mm
Overall System Depth (C)	600mm
Service Clearance (D)	500mm
Service Clearance (E)	500mm

Disclaimer. Southland Filtration reserves the right to, at any time change any details of design, specifications and performance figures of any published data.

Freecall 1800 656 771
southlandfiltration.com.au

southland
 FILTRATION

D-12-GF


GLASS MEDIA FILTER

Duplex Glass AFM Media Filter for High Capacity Service Flow Rate

Sediment particle filtration to
as low as 1 micron, removing
hydrocarbons, organics and
microplastics.




GLASS MEDIA FILTER



FEATURES

- Save time and reduce labour costs with this preassembled kit
- Easy to order with a single product code
- Reduce equipment maintenance costs with the No Unfiltered Water Bypass Valve option
- Choice of different metered control options
- Save on costs with fewer media replacements with separate source backwash option
- Suitable for any site application with flexible filter configurations
- Reduced downtime with sequential or parallel controls for multiple filters

PLANS/DRAWINGS

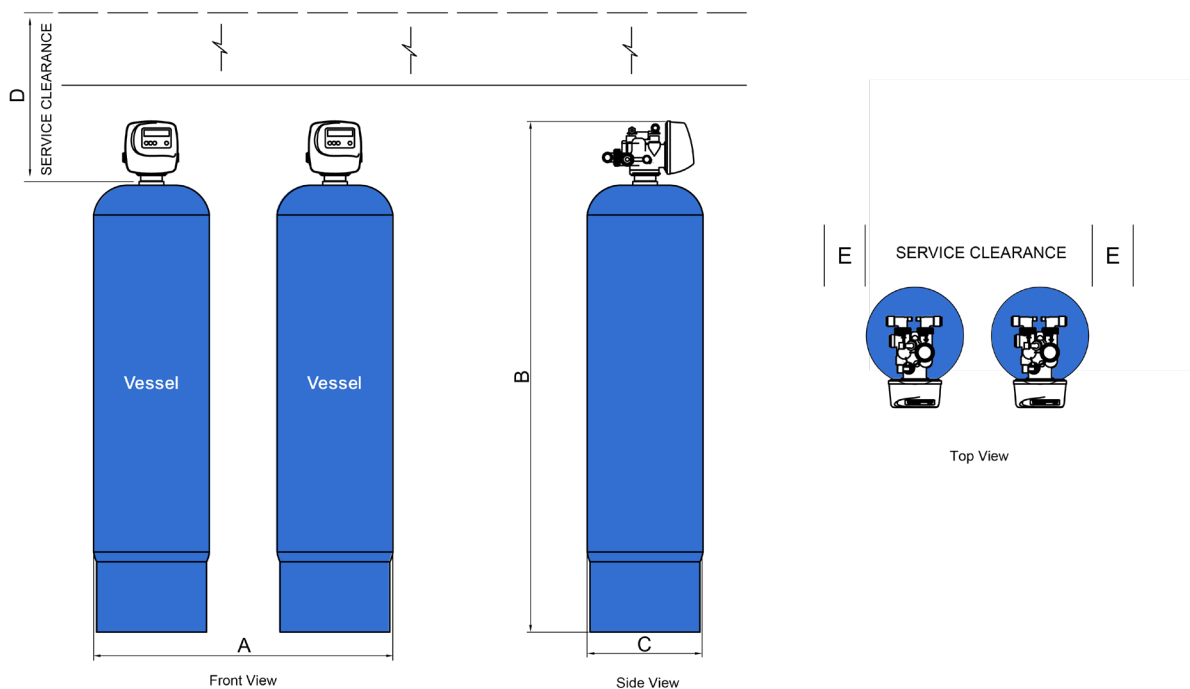

SPECIFICATIONS

PRODUCT CODE

D-12-GF

FLOW RATES

Service Flow (lpm)	24
Peak Service Flow (lpm)	48
Backwash Flow (lpm)	38

OPERATING PRESSURES

Min Operating Pressure	240kPa
Max Operating Pressure	700kPa

CONNECTIONS

Inlet/Outlet Connection size	25mm BSPM
Drain Connection Size	19mm Hose Barb

TEMPERATURE RANGE

5°C - 43°C

WEIGHT

Approximate Operating Weight (kg) 290

ELECTRICAL

Supply 2 x GPO 240V,10Amp

DIMENSIONS

Overall System Width (A)	910mm
Overall System Height (B)	1525mm
Overall System Depth (C)	655mm
Service Clearance (D)	500mm
Service Clearance (E)	500mm

Disclaimer. Southland Filtration reserves the right to, at any time change any details of design, specifications and performance figures of any published data.

Freecall 1800 656 771
southlandfiltration.com.au

southland
 FILTRATION

D-13-GF


GLASS MEDIA FILTER

Duplex Glass AFM Media Filter for High Capacity Service Flow Rate

Sediment particle filtration to as low as 1 micron, removing hydrocarbons, organics and microplastics.




GLASS MEDIA FILTER



FEATURES

- Save time and reduce labour costs with this preassembled kit
- Easy to order with a single product code
- Reduce equipment maintenance costs with the No Unfiltered Water Bypass Valve option
- Choice of different metered control options
- Save on costs with fewer media replacements with separate source backwash option
- Suitable for any site application with flexible filter configurations
- Reduced downtime with sequential or parallel controls for multiple filters

PLANS/DRAWINGS

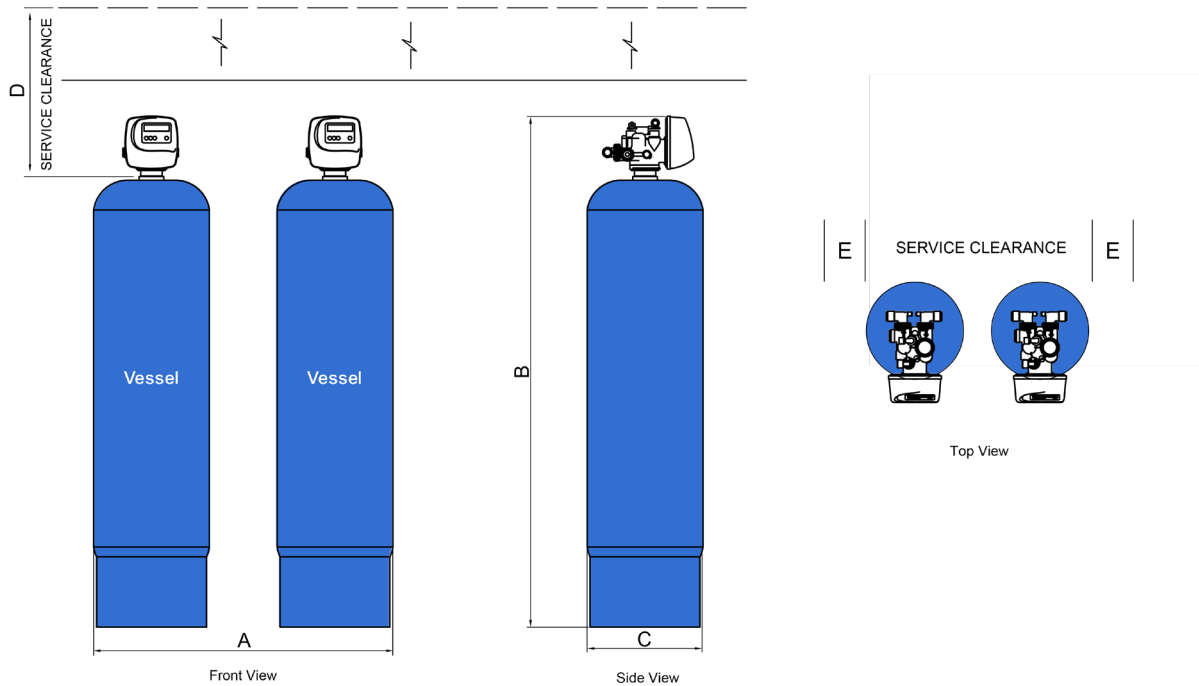

SPECIFICATIONS

PRODUCT CODE

D-13-GF

FLOW RATES

Service Flow (lpm)	28
Peak Service Flow (lpm)	56
Backwash Flow (lpm)	42

OPERATING PRESSURES

Min Operating Pressure	240kPa
Max Operating Pressure	700kPa

CONNECTIONS

Inlet/Outlet Connection size	32mm BSPM
Drain Connection Size	25mm Hose Barb

TEMPERATURE RANGE

5°C - 43°C

WEIGHT

Approximate Operating Weight (kg) 350

ELECTRICAL

Supply 2 x GPO 240V,10Amp

DIMENSIONS

Overall System Width (A)	960mm
Overall System Height (B)	1635mm
Overall System Depth (C)	680mm
Service Clearance (D)	500mm
Service Clearance (E)	500mm

Disclaimer. Southland Filtration reserves the right to, at any time change any details of design, specifications and performance figures of any published data.

Freecall 1800 656 771
southlandfiltration.com.au

southland
 FILTRATION

D-14-GF


GLASS MEDIA FILTER

Duplex Glass AFM Media Filter for High Capacity Service Flow Rate

Sediment particle filtration to as low as 1 micron, removing hydrocarbons, organics and microplastics.




GLASS MEDIA FILTER



FEATURES

- Save time and reduce labour costs with this preassembled kit
- Easy to order with a single product code
- Reduce equipment maintenance costs with the No Unfiltered Water Bypass Valve option
- Choice of different metered control options
- Save on costs with fewer media replacements with separate source backwash option
- Suitable for any site application with flexible filter configurations
- Reduced downtime with sequential or parallel controls for multiple filters

PLANS/DRAWINGS

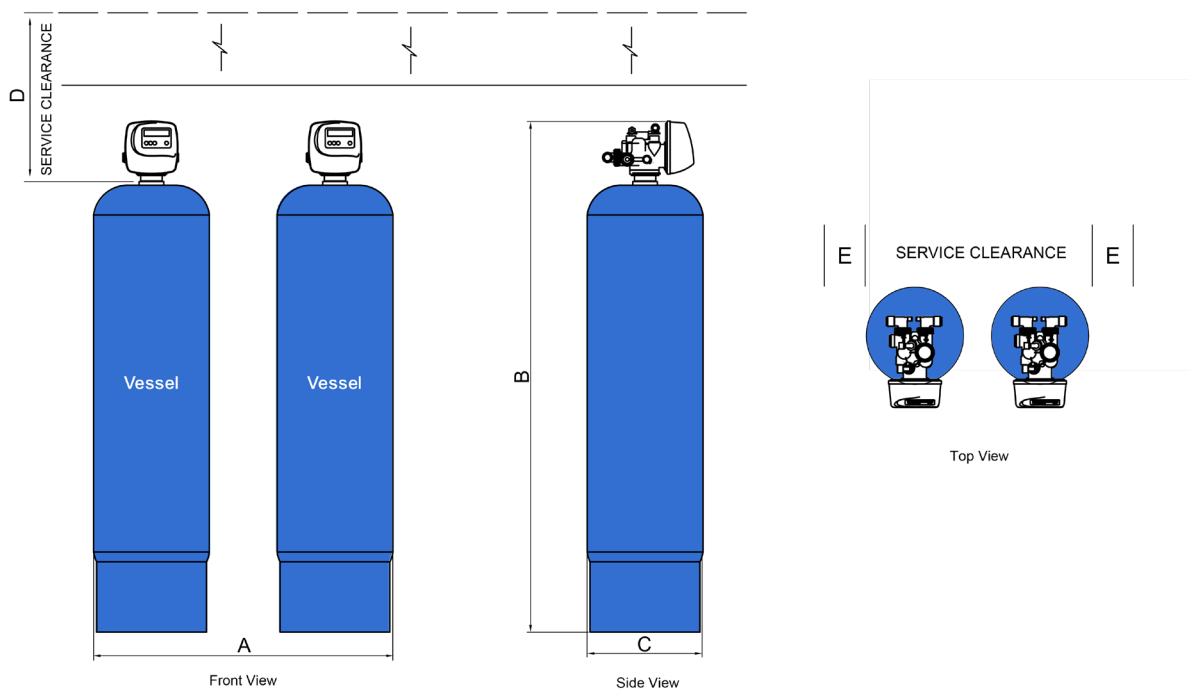

SPECIFICATIONS

PRODUCT CODE

D-14-GF

FLOW RATES

Service Flow (lpm)	32
Peak Service Flow (lpm)	66
Backwash Flow (lpm)	49

OPERATING PRESSURES

Min Operating Pressure	240kPa
Max Operating Pressure	700kPa

CONNECTIONS

Inlet/Outlet Connection size	32mm BSPM
Drain Connection Size	25mm Hose Barb

TEMPERATURE RANGE

5°C - 43°C

WEIGHT

Approximate Operating Weight (kg) 480

ELECTRICAL

Supply 2 x GPO 240V,10Amp

DIMENSIONS

Overall System Width (A)	1020mm
Overall System Height (B)	1865mm
Overall System Depth (C)	710mm
Service Clearance (D)	500mm
Service Clearance (E)	500mm

Disclaimer. Southland Filtration reserves the right to, at any time change any details of design, specifications and performance figures of any published data.

Freecall 1800 656 771
southlandfiltration.com.au

southland
 FILTRATION

D-16-GF


GLASS MEDIA FILTER

Duplex Glass AFM Media Filter for High Capacity Service Flow Rate

Sediment particle filtration to as low as 1 micron, removing hydrocarbons, organics and microplastics.




GLASS MEDIA FILTER



FEATURES

- Save time and reduce labour costs with this preassembled kit
- Easy to order with a single product code
- Reduce equipment maintenance costs with the No Unfiltered Water Bypass Valve option
- Choice of different metered control options
- Save on costs with fewer media replacements with separate source backwash option
- Suitable for any site application with flexible filter configurations
- Reduced downtime with sequential or parallel controls for multiple filters

PLANS/DRAWINGS

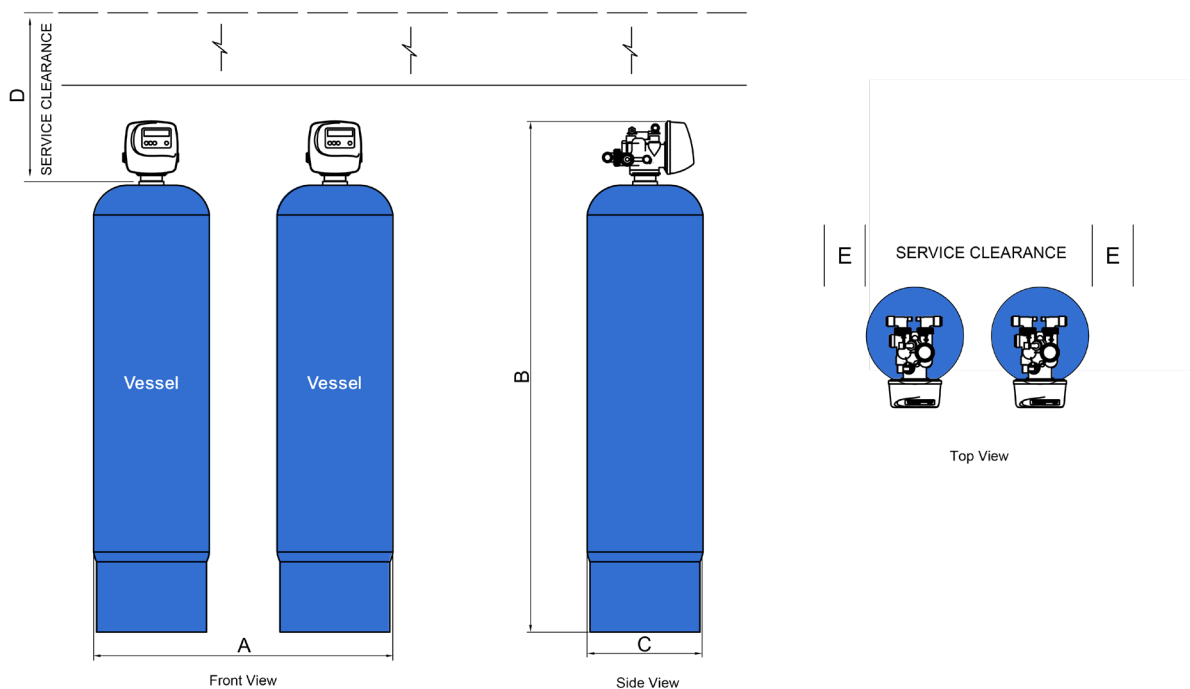

SPECIFICATIONS

PRODUCT CODE

D-16-GF

FLOW RATES

Service Flow (lpm)	41
Peak Service Flow (lpm)	86
Backwash Flow (lpm)	64

OPERATING PRESSURES

Min Operating Pressure	240kPa
Max Operating Pressure	700kPa

CONNECTIONS

Inlet/Outlet Connection size	40mm BSPF
Drain Connection Size	40mm BSPF

TEMPERATURE RANGE

5°C - 43°C

WEIGHT

Approximate Operating Weight (kg) 650

ELECTRICAL

Supply 2 x GPO 240V,10Amp

DIMENSIONS

Overall System Width (A)	1220mm
Overall System Height (B)	1944mm
Overall System Depth (C)	810mm
Service Clearance (D)	500mm
Service Clearance (E)	500mm

Disclaimer. Southland Filtration reserves the right to, at any time change any details of design, specifications and performance figures of any published data.

Freecall 1800 656 771
southlandfiltration.com.au

southland
 FILTRATION

D-18-GF


GLASS MEDIA FILTER

Duplex Glass AFM Media Filter for High Capacity Service Flow Rate

Sediment particle filtration to as low as 1 micron, removing hydrocarbons, organics and microplastics.




GLASS MEDIA FILTER



FEATURES

- Save time and reduce labour costs with this preassembled kit
- Easy to order with a single product code
- Reduce equipment maintenance costs with the No Unfiltered Water Bypass Valve option
- Choice of different metered control options
- Save on costs with fewer media replacements with separate source backwash option
- Suitable for any site application with flexible filter configurations
- Reduced downtime with sequential or parallel controls for multiple filters

PLANS/DRAWINGS

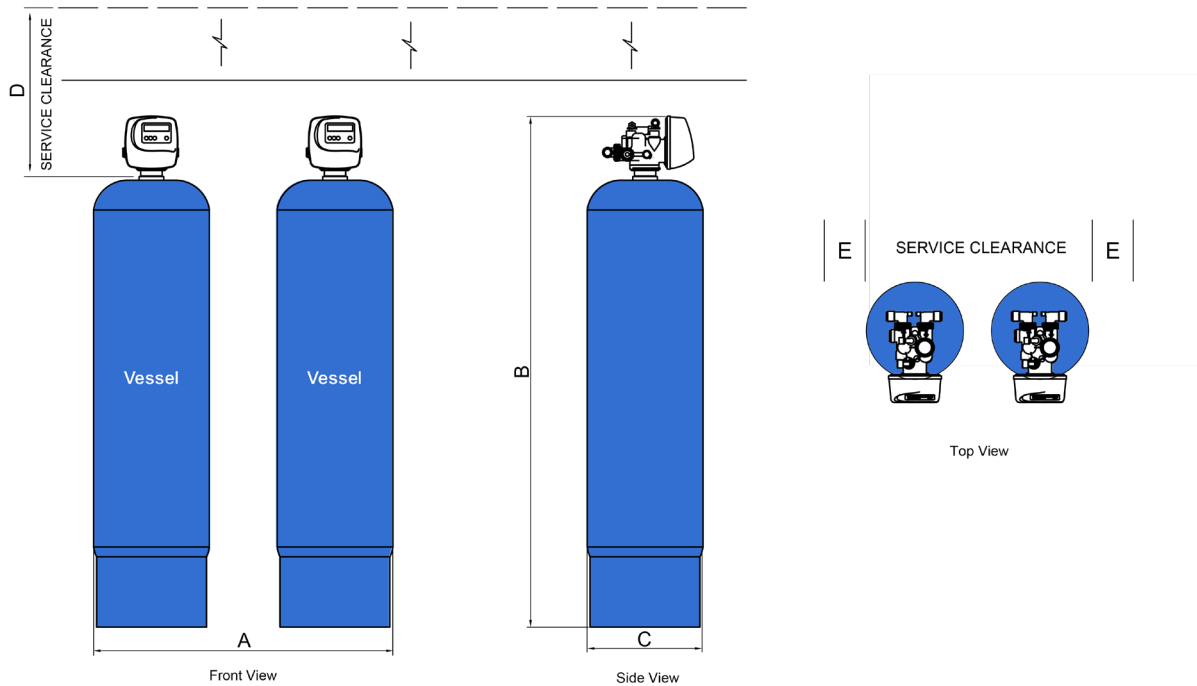

SPECIFICATIONS

PRODUCT CODE

D-18-GF

FLOW RATES

Service Flow (lpm) 54

Peak Service Flow (lpm) 108

Backwash Flow (lpm) 80

OPERATING PRESSURES

Min Operating Pressure 240kPa

Max Operating Pressure 700kPa

CONNECTIONS

Inlet/Outlet Connection size 40mm BSPF

Drain Connection Size 40mm BSPF

TEMPERATURE RANGE

5°C - 43°C

WEIGHT

Approximate Operating Weight (kg) 890

ELECTRICAL

Supply 2 x GPO 240V,10Amp

DIMENSIONS

Overall System Width (A) 1320mm

Overall System Height (B) 2000mm

Overall System Depth (C) 860mm

Service Clearance (D) 1000mm

Service Clearance (E) 1000mm

Disclaimer. Southland Filtration reserves the right to, at any time change any details of design, specifications and performance figures of any published data.

Freecall 1800 656 771
southlandfiltration.com.au

southland
 FILTRATION

D-21-GF


GLASS MEDIA FILTER

Duplex Glass AFM Media Filter for High Capacity Service Flow Rate

Sediment particle filtration to as low as 1 micron, removing hydrocarbons, organics and microplastics.




GLASS MEDIA FILTER



FEATURES

- Save time and reduce labour costs with this preassembled kit
- Easy to order with a single product code
- Reduce equipment maintenance costs with the No Unfiltered Water Bypass Valve option
- Choice of different metered control options
- Save on costs with fewer media replacements with separate source backwash option
- Suitable for any site application with flexible filter configurations
- Reduced downtime with sequential or parallel controls for multiple filters

PLANS/DRAWINGS

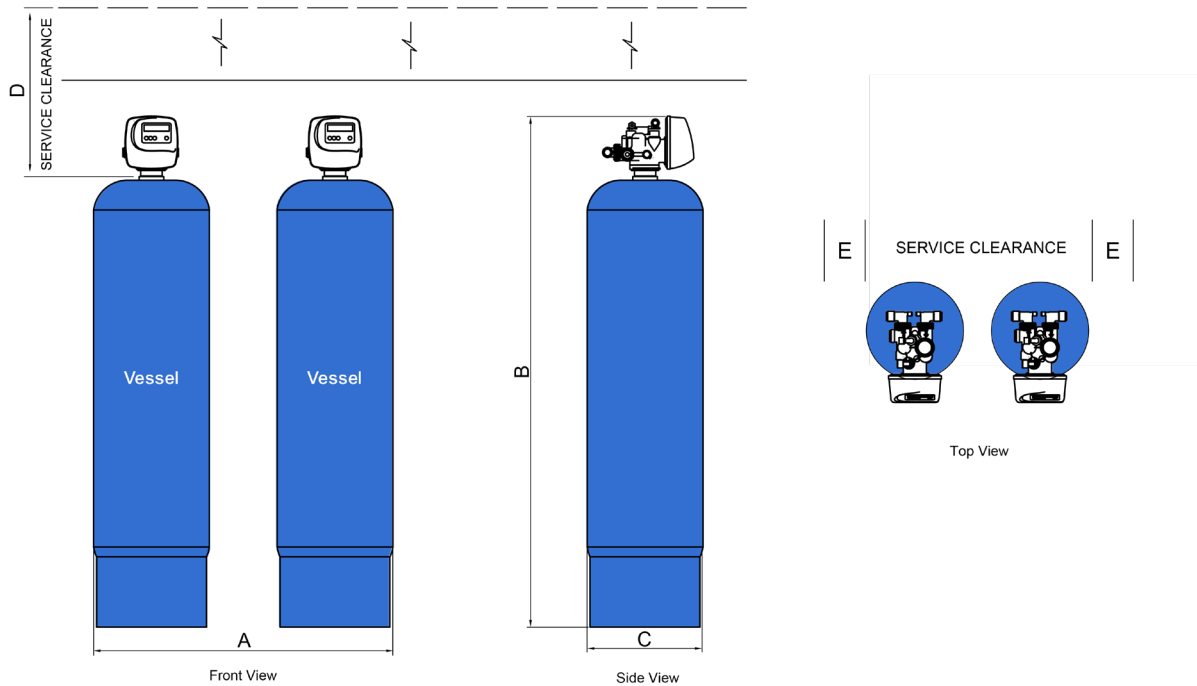

SPECIFICATIONS

PRODUCT CODE

D-21-GF

FLOW RATES

Service Flow (lpm) 74

Peak Service Flow (lpm) 148

Backwash Flow (lpm) 110

OPERATING PRESSURES

Min Operating Pressure 240kPa

Max Operating Pressure 700kPa

CONNECTIONS

Inlet/Outlet Connection size 40mm BSPF

Drain Connection Size 40mm BSPF

TEMPERATURE RANGE

5°C - 43°C

WEIGHT

Approximate Operating Weight (kg) 1154

ELECTRICAL

Supply 2 x GPO 240V,10Amp

DIMENSIONS

Overall System Width (A) 1470mm

Overall System Height (B) 2000mm

Overall System Depth (C) 935mm

Service Clearance (D) 1000mm

Service Clearance (E) 1000mm

Disclaimer. Southland Filtration reserves the right to, at any time change any details of design, specifications and performance figures of any published data.

Freecall 1800 656 771
southlandfiltration.com.au

southland
 FILTRATION

D-24-GF


GLASS MEDIA FILTER

Duplex Glass AFM Media Filter for High Capacity Service Flow Rate

Sediment particle filtration to as low as 1 micron, removing hydrocarbons, organics and microplastics.




GLASS MEDIA FILTER



FEATURES

- Save time and reduce labour costs with this preassembled kit
- Easy to order with a single product code
- Reduce equipment maintenance costs with the No Unfiltered Water Bypass Valve option
- Choice of different metered control options
- Save on costs with fewer media replacements with separate source backwash option
- Suitable for any site application with flexible filter configurations
- Reduced downtime with sequential or parallel controls for multiple filters

PLANS/DRAWINGS

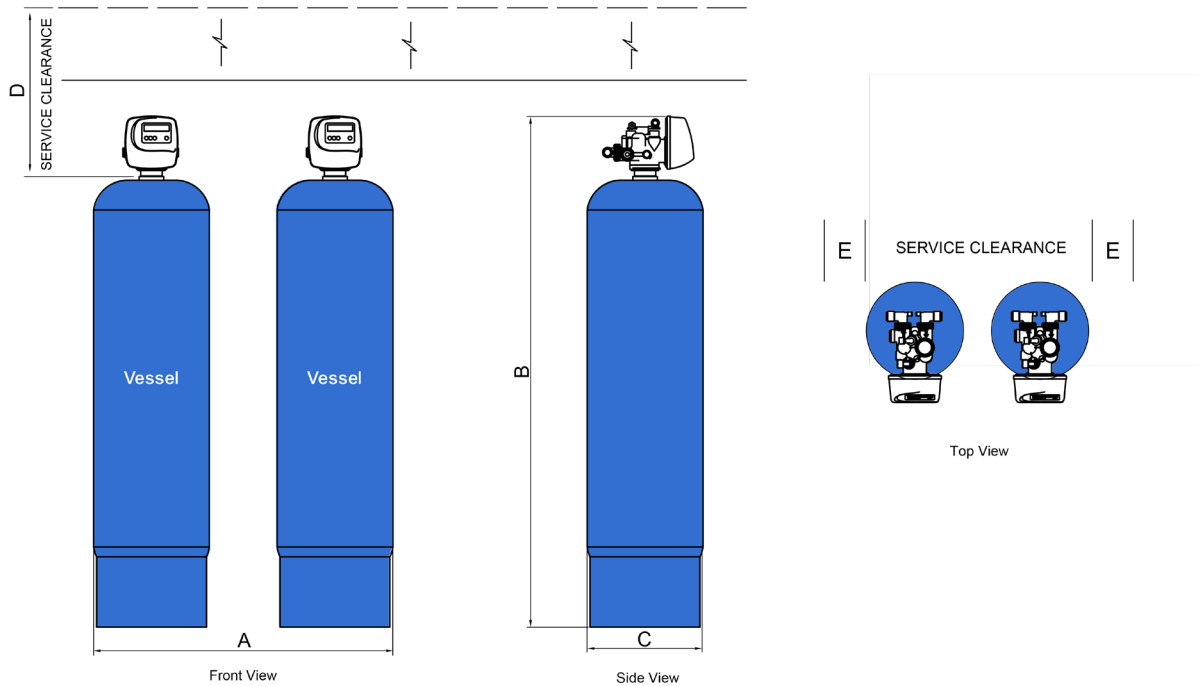

SPECIFICATIONS

PRODUCT CODE

D-24-GF

FLOW RATES

Service Flow (lpm)	96
Peak Service Flow (lpm)	194
Backwash Flow (lpm)	147

OPERATING PRESSURES

Min Operating Pressure	240kPa
Max Operating Pressure	700kPa

CONNECTIONS

Inlet/Outlet Connection size	50mm BSPF
Drain Connection Size	50mm BSPF

TEMPERATURE RANGE

5°C - 43°C

WEIGHT

Approximate Operating Weight (kg) 1588

ELECTRICAL

Supply 2 x GPO 240V,10Amp

DIMENSIONS

Overall System Width (A)	1620mm
Overall System Height (B)	2200mm
Overall System Depth (C)	1010mm
Service Clearance (D)	1000mm
Service Clearance (E)	1000mm

Disclaimer. Southland Filtration reserves the right to, at any time change any details of design, specifications and performance figures of any published data.

Freecall 1800 656 771
southlandfiltration.com.au

southland
 FILTRATION

D-30-GF


GLASS MEDIA FILTER

Duplex Glass AFM Media Filter for High Capacity Service Flow Rate

Sediment particle filtration to as low as 1 micron, removing hydrocarbons, organics and microplastics.




GLASS MEDIA FILTER



FEATURES

- Save time and reduce labour costs with this preassembled kit
- Easy to order with a single product code
- Reduce equipment maintenance costs with the No Unfiltered Water Bypass Valve option
- Choice of different metered control options
- Save on costs with fewer media replacements with separate source backwash option
- Suitable for any site application with flexible filter configurations
- Reduced downtime with sequential or parallel controls for multiple filters

PLANS/DRAWINGS

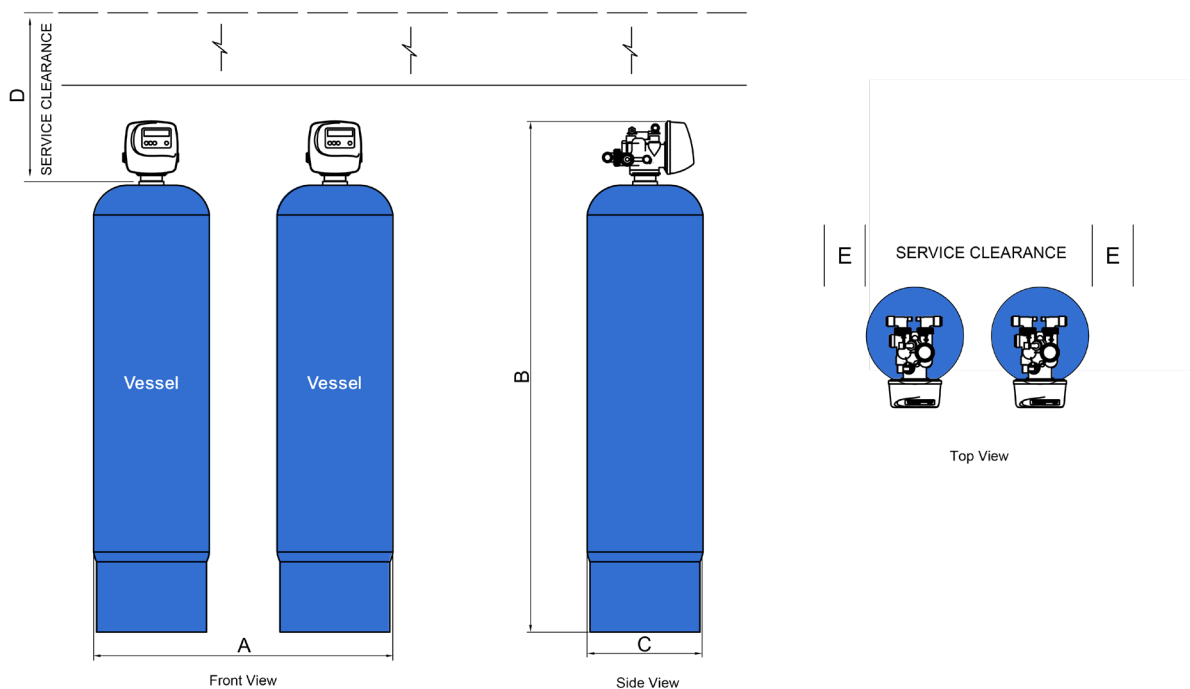

SPECIFICATIONS

PRODUCT CODE

D-30-GF

FLOW RATES

Service Flow (lpm)	152
Peak Service Flow (lpm)	304
Backwash Flow (lpm)	227

OPERATING PRESSURES

Min Operating Pressure	240kPa
Max Operating Pressure	700kPa

CONNECTIONS

Inlet/Outlet Connection size	50mm BSPF
Drain Connection Size	50mm BSPF

TEMPERATURE RANGE

5°C - 43°C

WEIGHT

Approximate Operating Weight (kg) 2490

ELECTRICAL

Supply 2 x GPO 240V,10Amp

DIMENSIONS

Overall System Width (A)	1940mm
Overall System Height (B)	2060mm
Overall System Depth (C)	1170mm
Service Clearance (D)	1000mm
Service Clearance (E)	1000mm

Disclaimer. Southland Filtration reserves the right to, at any time change any details of design, specifications and performance figures of any published data.

Freecall 1800 656 771
southlandfiltration.com.au

southland
 FILTRATION

D-36-GF


GLASS MEDIA FILTER

Duplex Glass AFM Media Filter for High Capacity Service Flow Rate

Sediment particle filtration to
as low as 1 micron, removing
hydrocarbons, organics and
microplastics.




GLASS MEDIA FILTER



FEATURES

- Save time and reduce labour costs with this preassembled kit
- Easy to order with a single product code
- Reduce equipment maintenance costs with the No Unfiltered Water Bypass Valve option
- Choice of different metered control options
- Save on costs with fewer media replacements with separate source backwash option
- Suitable for any site application with flexible filter configurations
- Reduced downtime with sequential or parallel controls for multiple filters

PLANS/DRAWINGS

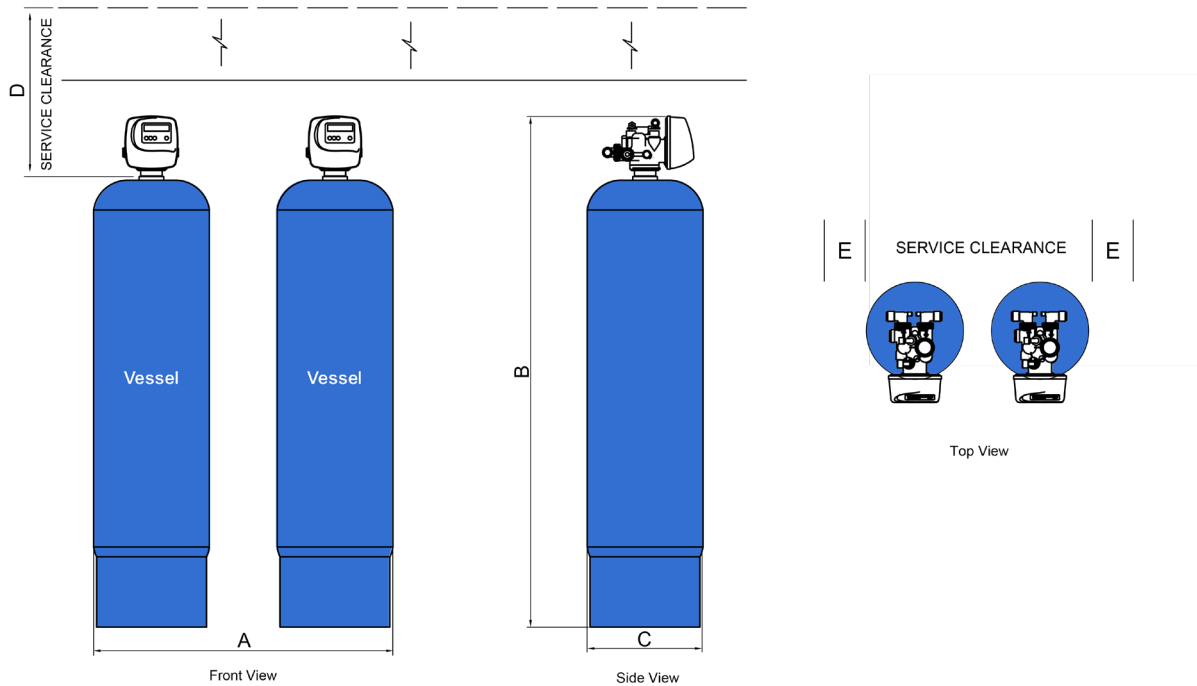

SPECIFICATIONS

PRODUCT CODE

D-36-GF

FLOW RATES

Service Flow (lpm) 218

Peak Service Flow (lpm) 438

Backwash Flow (lpm) 328

OPERATING PRESSURES

Min Operating Pressure 240kPa

Max Operating Pressure 700kPa

CONNECTIONS

Inlet/Outlet Connection size 50mm BSPF

Drain Connection Size 50mm BSPF

TEMPERATURE RANGE

5°C - 43°C

WEIGHT

Approximate Operating Weight (kg) 3430

ELECTRICAL

Supply 2 x GPO 240V,10Amp

DIMENSIONS

Overall System Width (A) 2230mm

Overall System Height (B) 2075mm

Overall System Depth (C) 1315mm

Service Clearance (D) 1000mm

Service Clearance (E) 1000mm

Disclaimer. Southland Filtration reserves the right to, at any time change any details of design, specifications and performance figures of any published data.

Freecall 1800 656 771
southlandfiltration.com.au

southland
 FILTRATION

D-42-GF


GLASS MEDIA FILTER

Duplex Glass AFM Media Filter for High Capacity Service Flow Rate

Sediment particle filtration to as low as 1 micron, removing hydrocarbons, organics and microplastics.




GLASS MEDIA FILTER



FEATURES

- Save time and reduce labour costs with this preassembled kit
- Easy to order with a single product code
- Reduce equipment maintenance costs with the No Unfiltered Water Bypass Valve option
- Choice of different metered control options
- Save on costs with fewer media replacements with separate source backwash option
- Suitable for any site application with flexible filter configurations
- Reduced downtime with sequential or parallel controls for multiple filters

PLANS/DRAWINGS

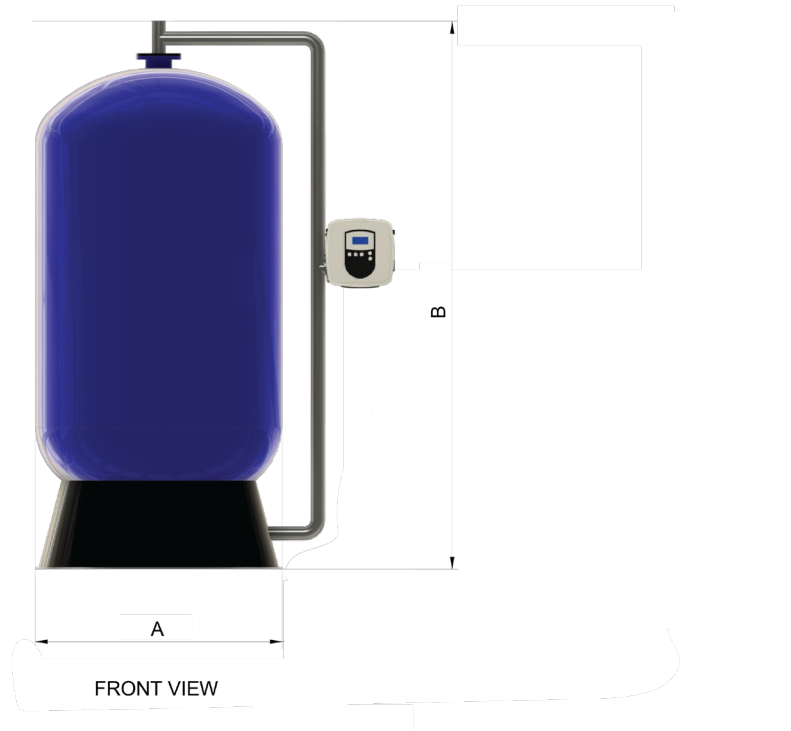

SPECIFICATIONS

PRODUCT CODE

D-42-GF

FLOW RATES

Service Flow (lpm)	298
Peak Service Flow (lpm)	596
Backwash Flow (lpm)	446

OPERATING PRESSURES

Min Operating Pressure	240kPa
Max Operating Pressure	700kPa

CONNECTIONS

Inlet/Outlet Connection size	80mm BSPF
Drain Connection Size	80mm BSPF

TEMPERATURE RANGE

5°C - 43°C

WEIGHT

Approximate Operating Weight (kg) 5310

ELECTRICAL

Supply 2 x GPO 240V,10Amp

DIMENSIONS

Overall System Width (A)	3140mm
Overall System Height (B)	2580mm
Overall System Depth (C)	1670mm
Service Clearance (D)	1000mm
Service Clearance (E)	1000mm

Disclaimer. Southland Filtration reserves the right to, at any time change any details of design, specifications and performance figures of any published data.

Freecall 1800 656 771
southlandfiltration.com.au

southland
FILTRATION

D-48-GF


GLASS MEDIA FILTER

Duplex Glass AFM Media Filter for High Capacity Service Flow Rate

Sediment particle filtration to as low as 1 micron, removing hydrocarbons, organics and microplastics.



GLASS MEDIA FILTER



FEATURES

- Save time and reduce labour costs with this preassembled kit
- Easy to order with a single product code
- Reduce equipment maintenance costs with the No Unfiltered Water Bypass Valve option
- Choice of different metered control options
- Save on costs with fewer media replacements with separate source backwash option
- Suitable for any site application with flexible filter configurations
- Reduced downtime with sequential or parallel controls for multiple filters

PLANS/DRAWINGS



SPECIFICATIONS

PRODUCT CODE

D-48-GF

FLOW RATES

Service Flow (lpm) 388

Peak Service Flow (lpm) 778

Backwash Flow (lpm) 587

OPERATING PRESSURES

Min Operating Pressure 240kPa

Max Operating Pressure 700kPa

CONNECTIONS

Inlet/Outlet Connection size 80mm BSPF

Drain Connection Size 80mm BSPF

TEMPERATURE RANGE

5°C - 43°C

WEIGHT

Approximate Operating Weight (kg) 6880

ELECTRICAL

Supply 2 x GPO 240V,10Amp

DIMENSIONS

Overall System Width (A) 3440mm

Overall System Height (B) 2580mm

Overall System Depth (C) 1820mm

Service Clearance (D) 1000mm

Service Clearance (E) 1000mm

Disclaimer. Southland Filtration reserves the right to, at any time change any details of design, specifications and performance figures of any published data.

Freecall 1800 656 771
southlandfiltration.com.au

southland
FILTRATION