


D1, D2, D3 Series

FILTRATION AND DISINFECTION MODULE

For control of sediment such as dirt, rust, sand, hard water minerals, clay etc. and the control of bad taste and odour.



DUAL STAGED SEDIMENT & CARBON FILTER




FEATURES

- **Modular Design** - Pre-packaged design ensure quick and easy installation.
- **Efficient & Cost Effective** - Minimal pressure drop, with high flow
- **Durable** - Reinforced polypropylene housings, with pressure relief valve, wall-mount bracket and spanner
- **Moulded Head Design** - Moulded twin head system ensures compact installation and no leaks
- **WaterMark Approved** - Independently certified to comply with Plumbing Code of Australia.

D1, D2, D3 Series

PLANS/DRAWINGS

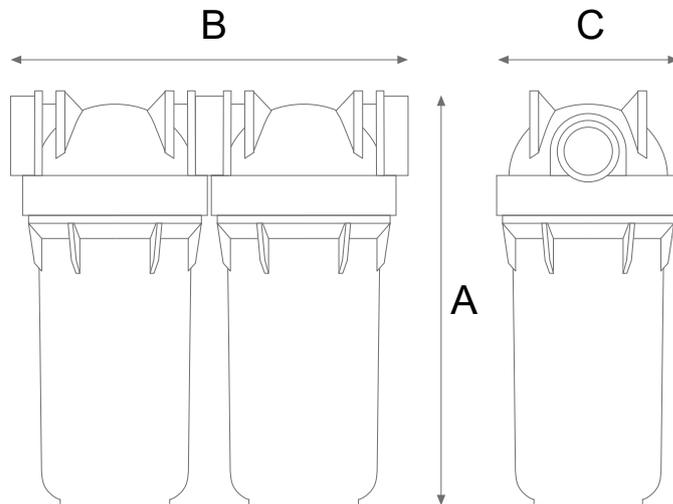

SPECIFICATIONS

PRODUCT CODE

D1	D00100501
D2	D00100502
D3	D00101001

FLOW RATES

D1	Max flow rate	60L/m (3.6m ³ /h)
D2	Max flow rate	90L/m (5.4m ³ /h)
D3	Max flow rate	180L/m (10.8m ³ /h)

OPERATING PRESSURES

D1	Max pressure	830 kPa
D2	Max pressure	830 kPa
D3	Max pressure	830 kPa

CONNECTIONS

D1	Inlet/Outlet	1" BSP (25mm)
D2	Inlet/Outlet	1" BSP (25mm)
D3	Inlet/Outlet	1½" BSP (40mm)

TEMPERATURE

D1	Max temperature	45°C
D2	Max temperature	45°C
D3	Max temperature	45°C

INSTALLED DIMENSIONS (MM)

	Height (A)	Width (B)	Depth (C)
D1	375	390	185
D2	640	390	185
D3	640	390	185

REPLACEMENT ELEMENTS

Sediment Cartridge 1um, 5um, 20um, 50um (Refer to pricelist)

Carbon Cartridge 10um (Refer to pricelist)

Disclaimer. Southland Filtration reserves the right to, at any time change any details of design, specifications and performance figures of any published data.

Freecall 1800 656 771
southlandfiltration.com.au

southland
 FILTRATION