

SLB-P100B

SKAN BAG FILTERS

Versatile solution for water, oils, chemicals, beverages, paints, offering simplicity, speed, and cost-effectiveness over complex systems.




SLB-P100 SERIES

FEATURES

- Strong polypropylene construction
- Wide range of chemical resistance
- Includes 2 support legs
- Side inlet / Bottom outlet
- Fits standard 6"x 20" 05 Size X100 bags
- Easy lid removal for swift bag change
- Optional Pressure Differential Sensor available for filter bag change alert
- Compact: Minimum installation disruption
- Cost effective solution: High flow rates - Low filtration costs
- Efficient: Minimal pressure drop during filtration

Freecall 1800 656 771
southlandfiltration.com.au

PLANS/DRAWINGS

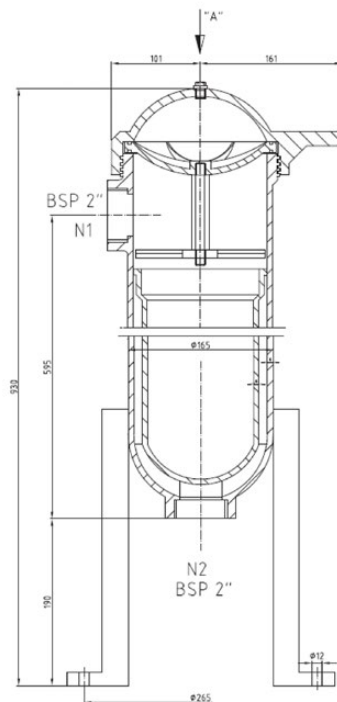

OPERATIONAL REQUIREMENTS

PRODUCT CODE	MICRON RATINGS AVAILABLE		
S05102501	1um, 5um, 10um, 20um, 50um, 100um		
FLOW RATES (M³/HR)	WEIGHT (KG)		
Max Flow Rate	18m ³ / hour	Packaged (kg)	7kg
TEMPERATURE		Empty	5kg
Max temperature	43° C	In service (water)	15kg
OPERATING PRESSURES (KPA)		INSTALLED DIMENSIONS (MM)	
Max operating pressure	620 kPa	Height	930
CONNECTIONS		Width	272
Inlet/Outlet (NPT)	2" NPT (50mm)	Depth	272
FILTER SURFACE AREA (M²)			
0.185M ²			

Disclaimer. Southland Filtration reserves the right to, at any time change any details of design, specifications and performance figures of any published data.

Freecall 1800 656 771
southlandfiltration.com.au

southland
FILTRATION