


D60

FILTRATION & DISINFECTION MODULE

For control of bacteria, bad taste and odour as well as sediment such as dirt, rust, sand, hard water minerals, clay etc.



TRIPLE STAGED SEDIMENT FILTERS + AUTO BACKWASHING + UV DISINFECTION



FEATURES


- **Modular Design** - Pre-packaged design ensure quick and easy installation.
- **Plug & Play** - Compact, pre-packaged design ensures quick and easy installation. Supplied fitted to backboard, minimising footprint.
- **Automatic Backwash Filter** - Complete with Timer Control with 100um stainless steel screen - quality German design and manufacture.
- **Multiple Stages** - dual cartridge housings complete with 20 and 5 micron washable sediment filters
- **Maximum Bacteria Kill** - Utilises high output, eco-friendly UV disinfection technology to ensure maximum bacteria kill
- **Protective Cover** - Streamline powder-coated galvanised cover for weather and security protection

Freecall 1800 656 771
southlandfiltration.com.au

 **southland**
FILTRATION

D60 Series

PLANS/DRAWINGS

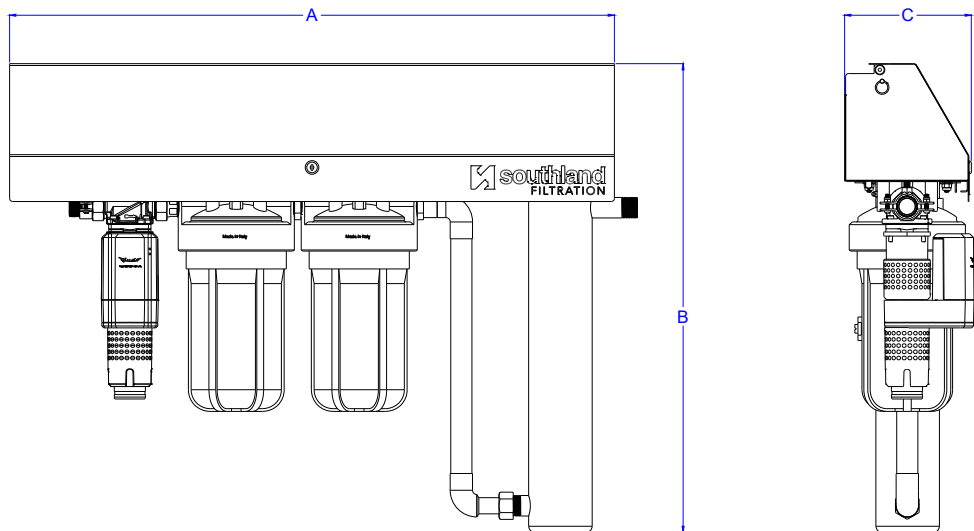

SPECIFICATIONS

PRODUCT CODE	
D00500501	
FLOW RATES	
Max flow rate	60L/m (3.6m3/h)
OPERATING PRESSURES	
Max pressure	830 kPa
CONNECTIONS	
Inlet/Outlet	1" BSP (25mm)
POWER	
Power supply	2 x 10 Amp GPO
TEMPERATURE	
Max temperature	45°C

INSTALLED DIMENSIONS (MM)			
Width (A)	Height (B)	Depth (C)	Lid open (D)
974	755	205	1000
REPLACEMENT ELEMENTS			
Sediment Cartridge	1um, 5um, 20um, 50um (Refer to pricelist)		
Carbon Cartridge	10um (Refer to pricelist)		
Quartz Thimble O-Ring	N/A		
UV Thimble O-Ring	OR25-SK		
UV Lamp	LL053A-S4		
UV Thimble	QD060025		

Disclaimer. Southland Filtration reserves the right to, at any time change any details of design, specifications and performance figures of any published data.

Freecall 1800 656 771
southlandfiltration.com.au

southland
FILTRATION


D120

FILTRATION & DISINFECTION MODULE

For control of bacteria, bad taste and odour as well as sediment such as dirt, rust, sand, hard water minerals, clay etc.



TRIPLE STAGED SEDIMENT FILTERS + AUTO BACKWASHING + UV DISINFECTION



FEATURES


- **Modular Design** - Pre-packaged design ensure quick and easy installation.
- **Plug & Play** - Compact, pre-packaged design ensures quick and easy installation. Supplied fitted to backboard, minimising footprint.
- **Automatic Backwash Filter** - Complete with Timer Control with 100um stainless steel screen - quality German design and manufacture.
- **Multiple Stages** - dual cartridge housings complete with 20 and 5 micron washable sediment filters
- **Maximum Bacteria Kill** - Utilises high output, eco-friendly UV disinfection technology to ensure maximum bacteria kill
- **Protective Cover** - Streamline powder-coated galvanised cover for weather and security protection

Freecall 1800 656 771
southlandfiltration.com.au

 **southland**
FILTRATION

D120 Series

PLANS/DRAWINGS

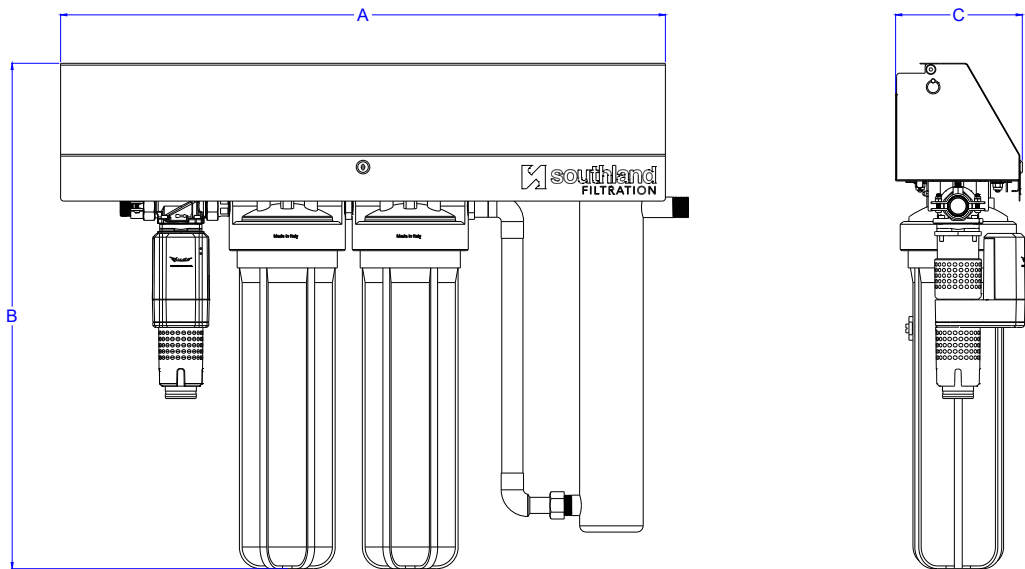

SPECIFICATIONS

PRODUCT CODE	
D00500502	
FLOW RATES	
Max flow rate	120L/m (7.2m3/h)
OPERATING PRESSURES	
Max pressure	830 kPa
CONNECTIONS	
Inlet/Outlet	1" BSP (25mm)
POWER	
Power supply	2 x 10 Amp GPO
TEMPERATURE	
Max temperature	45°C

INSTALLED DIMENSIONS (MM)			
Width (A)	Height (B)	Depth (C)	Lid open (D)
974	814	205	1059
REPLACEMENT ELEMENTS			
Sediment Cartridge	1um, 5um, 20um, 50um (Refer to pricelist)		
Carbon Cartridge	10um (Refer to pricelist)		
Quartz Thimble O-Ring	N/A		
UV Thimble O-Ring	OR25-SK		
UV Lamp	LL053A-S4		
UV Thimble	QD060025		

Disclaimer. Southland Filtration reserves the right to, at any time change any details of design, specifications and performance figures of any published data.

Freecall 1800 656 771
southlandfiltration.com.au

southland
 FILTRATION


D180

FILTRATION & DISINFECTION MODULE

For control of bacteria, bad taste and odour as well as sediment such as dirt, rust, sand, hard water minerals, clay etc.



TRIPLE STAGED SEDIMENT FILTERS + AUTO BACKWASHING + UV DISINFECTION



FEATURES


- **Modular Design** - Pre-packaged design ensure quick and easy installation.
- **Plug & Play** - Compact, pre-packaged design ensures quick and easy installation. Supplied fitted to backboard, minimising footprint.
- **Automatic Backwash Filter** - Complete with Timer Control with 100um stainless steel screen - quality German design and manufacture.
- **Multiple Stages** - dual cartridge housings complete with 20 and 5 micron washable sediment filters
- **Maximum Bacteria Kill** - Utilises high output, eco-friendly UV disinfection technology to ensure maximum bacteria kill
- **Protective Cover** - Streamline powder-coated galvanised cover for weather and security protection

Freecall 1800 656 771
southlandfiltration.com.au

 **southland**
FILTRATION

D180 Series

PLANS/DRAWINGS

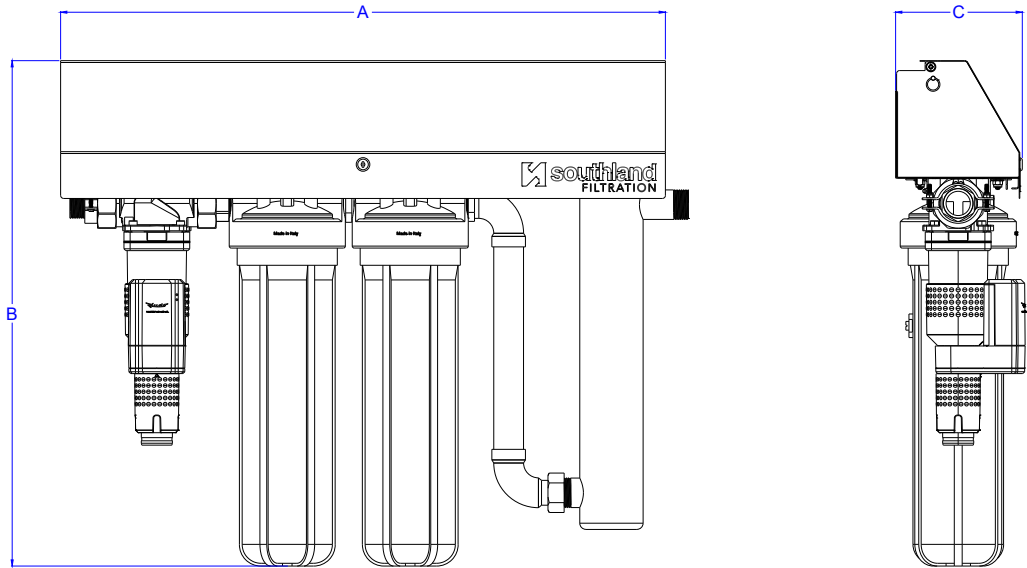

SPECIFICATIONS

PRODUCT CODE

D00500503

FLOW RATES

Max flow rate 180L/m (10.8m3/h)

OPERATING PRESSURES

Max pressure 830 kPa

CONNECTIONS

Inlet/Outlet 1½" BSP (40mm)

POWER

Power supply 2 x 10 Amp GPO

TEMPERATURE

Max temperature 45°C

INSTALLED DIMENSIONS (MM)

Width (A)	Height (B)	Depth (C)	Lid open (D)
974	814	205	1059

REPLACEMENT ELEMENTS

Sediment Cartridge	1um, 5um, 20um, 50um (Refer to pricelist)
Carbon Cartridge	10um (Refer to pricelist)
Quartz Thimble O-Ring	N/A
UV Thimble O-Ring	OR28-SK
UV Lamp	LL085-S4
UV Thimble	QD060028

Disclaimer. Southland Filtration reserves the right to, at any time change any details of design, specifications and performance figures of any published data.

Freecall 1800 656 771
southlandfiltration.com.au

southland
 FILTRATION