

SV0600-C**ULTRA-VIOLET
DISINFECTION
SYSTEMS****SKAN UV-C SERIES****FEATURES**

- Suitable for drinking and process water disinfection
- Configurable for treated wastewater and other low UV-transmission liquids
- Robust stainless-steel reactor for long service life
- Consistent UV performance from high-output lamps
- Integrated lamp status indication with alarm functionality
- Volt-free contacts for remote fault monitoring
- Rated for 1,000kPa operating pressure with 1,600kPa (higher-pressure option available)

SPECIFICATIONS

PRODUCT CODE

SV0600-C

FLOW RATES

Rated flow at dose 16 mJ/cm ² @ 95% UVT	139.1 L/m (2.31 L/s)
Rated flow at dose 25 mJ/cm ² @ 95% UVT	89 L/m (1.48 L/s)
Rated flow at dose 30 mJ/cm ² @ 95% UVT	74.2 L/m (1.23 L/s)
Rated flow at dose 40 mJ/cm ² @ 95% UVT	55.6 L/m (0.92 L/s)

OPERATING PARAMETERS

Max Operating Pressure	1000kPa
Ambient Air Temperature	0°C - 40°C
Influent Water Temperature	2°C - 37°C
Installation Orientation	Horizontal mounting with outlet pointing up

REACTOR

Chamber Material	Stainless Steel G316L, Electropolished
In-Outlet Connection	1" (25mm) Male BSPT
Reactor Volume (L)	4.5L
Reactor Length Overall (~mm)	680mm
Space Required for Servicing (~mm)	700mm
Reactor Dry Weight (Kg)	3.0kg
Operating Pressure (Max)	10 Bar
Lamp Power (W)	53W
UV-C Output (W)	19W
Number of Lamps (Each Unit)	1ea
Lamp Life (Hrs)	9,000 Hours

POWER SUPPLY BOX

Input	220-240 VAC, 50-60 Hz
Power Consumption (W)	-
Power Box Dimensions (mm)	205 x 75 x 53 mm
Power Box Weight (Kg)	0.7kg
IP Rating	IP23
Lamp Lead Length (M)	2m

FEATURES:

- Lamp parallel to water flow
- View/monitor port
- Easy to install brackets
- Watermark approved

OPTIONS:

- UV intensity monitor
- Spare set of volt free contacts
- Higher IP rating
- Warm/Hot Water Version available
- Enclosure material 316ss, or glass reinforced polyester
- Longer lamp lead
- Different mains supply
- Chamber thermostat with solenoid valve for over-temperature protection

Disclaimer. Southland Filtration reserves the right to, at any time change any details of design, specifications and performance figures of any published data.


Freecall 1800 656 771
southlandfiltration.com.au

southland
FILTRATION




SV0750-C**ULTRA-VIOLET
DISINFECTION
SYSTEMS****SKAN UV-C SERIES****FEATURES**

- Suitable for drinking and process water disinfection
- Configurable for treated wastewater and other low UV-transmission liquids
- Robust stainless-steel reactor for long service life
- Consistent UV performance from high-output lamps
- Integrated lamp status indication with alarm functionality
- Volt-free contacts for remote fault monitoring
- Rated for 1,000kPa operating pressure with 1,600kPa (higher-pressure option available)

PLANS/DRAWINGS

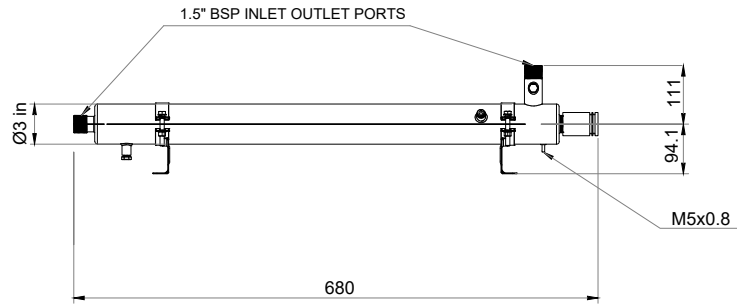

ISOMETRIC VIEW

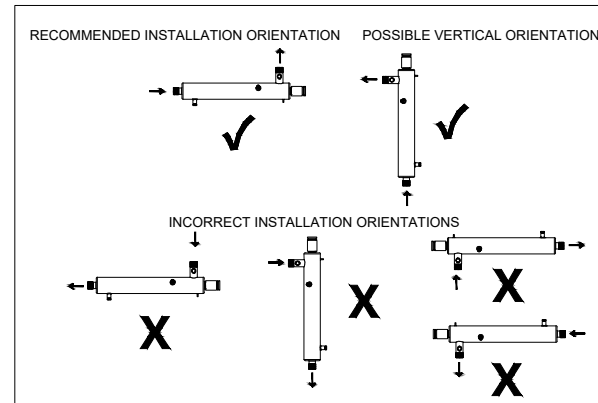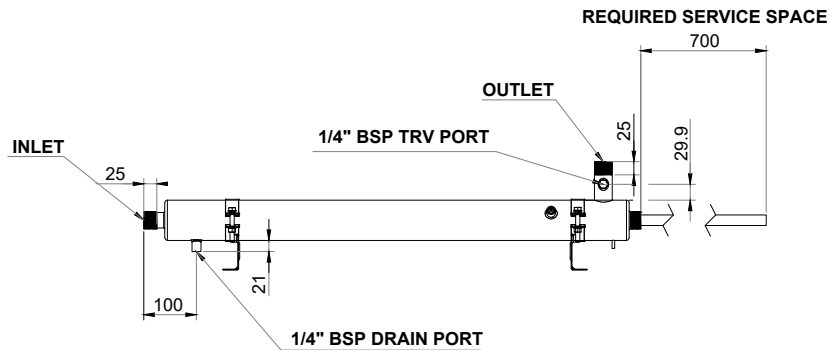

- STANDARD NOTES:**
- 1) SOUTHLAND FILTRATION SHALL SUPPLY AND INSTALL ALL EQUIPMENT AND PIPE WORK WITHIN THE BATTERY LIMITS STATED IN THE DRAWINGS UNLESS NOTED OTHERWISE.
 - 2) PIPING ROUTES ARE INDICATIVE ONLY AND WILL BE SITE RUN TO SUIT FINAL LOCATIONS OF EQUIPMENT. PIPING SHALL BE INSTALLED AND SUPPORTED IN ACCORDANCE WITH AS/NZS 3500.
 - 3) ALL ELECTRICAL WORKS (POWER AND CONTROL) SHALL BE BY CUSTOMER ("OTHERS") UNLESS NOTED OTHERWISE.
 - 4) EACH 240V GPO SHALL BE SINGLE OUTLET ONLY, FLAT FACED AND IP54 RATED.
 - 5) THREE PHASE CONNECTIONS TO EQUIPMENT SHALL BE PROVIDED WITH WALL MOUNTED ISOLATOR EXTERNAL TO EQUIPMENT. COMMANDO STYLE PLUGS SHALL BE USED WHERE SPECIFICALLY NOTED.
 - 6) DRAIN LINE PENETRATIONS THROUGH FLOOR SHALL BE SUPPLIED WITH AN OPEN TUNDRISH AS NOTED ON DRAWINGS.



© Copyright. This drawing is the property of Southland Filtration Pty Ltd. No reproduction or modification allowed without prior agreement.

REVISION NO.	DESCRIPTION	DATE	DRAWN	ENGINEER	AUTHORISED
0	FOR INFORMATION ONLY	30/04/2020	JM	RM	AC

FOR INFORMATION	
DRAWING NUMBER:	SOUTHLAND FILTRATION
CAD FILE:	
SCALE:	1:3

CLIENT:	SOUTHLAND FILTRATION
PROJECT:	C750
TITLE:	GENERAL ARRANGEMENT

SPECIFICATIONS

PRODUCT CODE

SV0750-C

FLOW RATES

Rated flow at dose 16 mJ/cm ² @ 95% UVT	223.2 L/m (3.7 L/s)
Rated flow at dose 25 mJ/cm ² @ 95% UVT	142.8 L/m (2.3 L/s)
Rated flow at dose 30 mJ/cm ² @ 95% UVT	119 L/m (1.9 L/s)
Rated flow at dose 40 mJ/cm ² @ 95% UVT	89.2 L/m (1.4 L/s)

OPERATING PARAMETERS

Max Operating Pressure	1000kPa
Ambient Air Temperature	0°C - 40°C
Influent Water Temperature	2°C - 37°C
Installation Orientation	Horizontal mounting with outlet pointing up

REACTOR

Chamber Material	Stainless Steel G316L, Electropolished
In-Outlet Connection	1.5" (40mm) Male BSPT
Reactor Volume (L)	4.5L
Reactor Length Overall (~mm)	680mm
Space Required for Servicing (~mm)	700mm
Reactor Dry Weight (Kg)	3.0kg
Operating Pressure (Max)	10 Bar
Lamp Power (W)	85W
UV-C Output (W)	29W
Number of Lamps (Each Unit)	1ea
Lamp Life (Hrs)	9,000 Hours

POWER SUPPLY BOX

Input	220-240 VAC, 50-60 Hz
Power Consumption (W)	-
Power Box Dimensions (mm)	270 x 75 x 53 mm
Power Box Weight (Kg)	1.1kg
IP Rating	IP23
Lamp Lead Length (M)	2m

FEATURES:

- Lamp parallel to water flow
- View/monitor port
- Easy to install brackets
- Watermark approved

OPTIONS:

- UV intensity monitor
- Spare set of volt free contacts
- Higher IP rating
- Warm/Hot Water Version available
- Enclosure material 316ss, or glass reinforced polyester
- Longer lamp lead
- Different mains supply
- Chamber thermostat with solenoid valve for over-temperature protection

Disclaimer. Southland Filtration reserves the right to, at any time change any details of design, specifications and performance figures of any published data.


Freecall 1800 656 771
southlandfiltration.com.au

southland
FILTRATION



SV1100-C**ULTRA-VIOLET
DISINFECTION
SYSTEMS****SKAN UV-C SERIES****FEATURES**

- Suitable for drinking and process water disinfection
- Configurable for treated wastewater and other low UV-transmission liquids
- Robust stainless-steel reactor for long service life
- Consistent UV performance from high-output lamps
- Integrated lamp status indication with alarm functionality
- Volt-free contacts for remote fault monitoring
- Rated for 1,000kPa operating pressure with 1,600kPa (higher-pressure option available)

PLANS/DRAWINGS

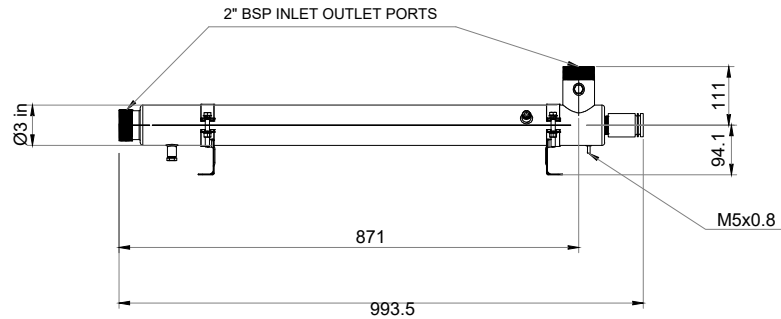

ISOMETRIC VIEW

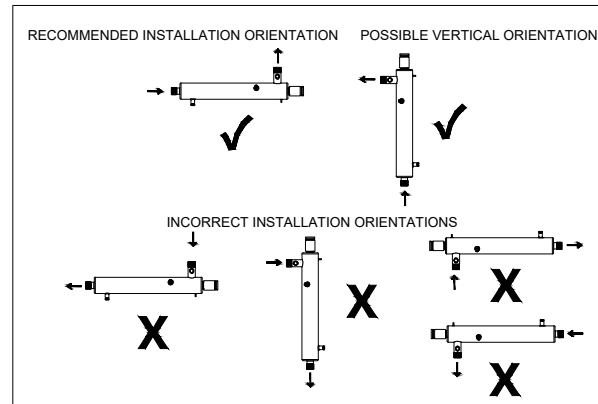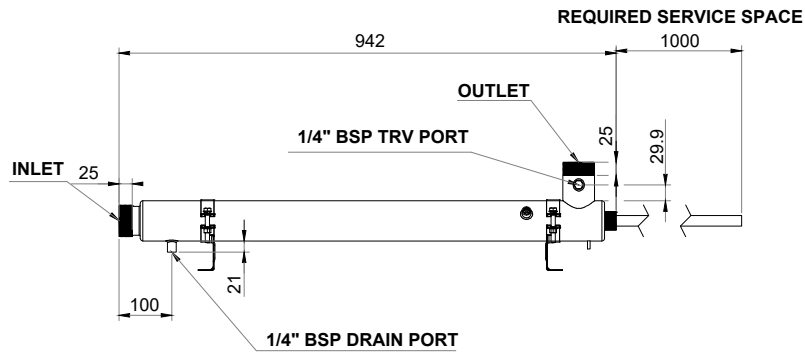

STANDARD NOTES:

- 1) SOUTHLAND FILTRATION SHALL SUPPLY AND INSTALL ALL EQUIPMENT AND PIPE WORK WITHIN THE BATTERY LIMITS STATED IN THE DRAWINGS UNLESS NOTED OTHERWISE.
- 2) PIPING ROUTES ARE INDICATIVE ONLY AND WILL BE SITE RUN TO SUIT FINAL LOCATIONS OF EQUIPMENT. PIPING SHALL BE INSTALLED AND SUPPORTED IN ACCORDANCE WITH AS/NZS 3500.
- 3) ALL ELECTRICAL WORKS (POWER AND CONTROL) SHALL BE BY CUSTOMER ("OTHERS") UNLESS NOTED OTHERWISE.
- 4) EACH 240V GPO SHALL BE SINGLE OUTLET ONLY, FLAT FACED AND IP54 RATED.
- 5) THREE PHASE CONNECTIONS TO EQUIPMENT SHALL BE PROVIDED WITH WALL MOUNTED ISOLATOR EXTERNAL TO EQUIPMENT. COMMANDO STYLE PLUGS SHALL BE USED WHERE SPECIFICALLY NOTED.
- 6) DRAIN LINE PENETRATIONS THROUGH FLOOR SHALL BE SUPPLIED WITH AN OPEN TUNDRISH AS NOTED ON DRAWINGS.



SOUTHLAND FILTRATION PTY LTD
www.southlandfiltration.com.au
1800 656 771

© Copyright. This drawing is the property of Southland Filtration Pty Ltd. No reproduction or modification allowed without prior agreement.

REVISION NO.	DESCRIPTION	DATE	DRAWN	ENGINEER	AUTHORISED
0	FOR INFORMATION ONLY	1.03.2026	JM	RM	AC

FOR INFORMATION	
DRAWING NUMBER:	SOUTHLAND FILTRATION
CAD FILE:	
SCALE:	1:3

CLIENT:	SOUTHLAND FILTRATION
PROJECT:	C1100
TITLE:	GENERAL ARRANGEMENT

SPECIFICATIONS

PRODUCT CODE

SV1100-C

FLOW RATES

Rated flow at dose 16 mJ/cm ² @ 95% UVT	169.2 L/m (2.82 L/s)
Rated flow at dose 25 mJ/cm ² @ 95% UVT	135 L/m (2.25 L/s)
Rated flow at dose 30 mJ/cm ² @ 95% UVT	112.8 L/m (1.88 L/s)
Rated flow at dose 40 mJ/cm ² @ 95% UVT	84.6 L/m (1.41 L/s)

OPERATING PARAMETERS

Max Operating Pressure	1000kPa
Ambient Air Temperature	0°C - 40°C
Influent Water Temperature	2°C - 37°C
Installation Orientation	Horizontal mounting with outlet pointing up

REACTOR

Chamber Material	Stainless Steel G316L, Electropolished
In-Outlet Connection	2" (50mm) Male BSPT
Reactor Volume (L)	3.6L
Reactor Length Overall (~mm)	1,006mm
Space Required for Servicing (~mm)	1,000mm
Reactor Dry Weight (Kg)	3.7kg
Operating Pressure (Max)	10 Bar
Lamp Power (W)	127W
UV-C Output (W)	43W
Number of Lamps (Each Unit)	1ea
Lamp Life (Hrs)	12,000 Hours

POWER SUPPLY BOX

Input	220-240 VAC, 50-60 Hz
Power Consumption (W)	145W
Power Box Dimensions (mm)	400 x 300 x 200 mm
Power Box Weight (Kg)	9kg
IP Rating	IP23
Lamp Lead Length (M)	2m

FEATURES:

- Lamp parallel to water flow
- View/monitor port
- Easy to install brackets
- Watermark approved

OPTIONS:

- UV intensity monitor
- Spare set of volt free contacts
- Higher IP rating
- Warm/Hot Water Version available
- Enclosure material 316ss, or glass reinforced polyester
- Longer lamp lead
- Different mains supply
- Chamber thermostat with solenoid valve for over-temperature protection

Disclaimer. Southland Filtration reserves the right to, at any time change any details of design, specifications and performance figures of any published data.


Freecall 1800 656 771
southlandfiltration.com.au

southland
FILTRATION



SV1200-C**ULTRA-VIOLET
DISINFECTION
SYSTEMS****SKAN UV-C SERIES****FEATURES**

- Suitable for drinking and process water disinfection
- Configurable for treated wastewater and other low UV-transmission liquids
- Robust stainless-steel reactor for long service life
- Consistent UV performance from high-output lamps
- Integrated lamp status indication with alarm functionality
- Volt-free contacts for remote fault monitoring
- Rated for 1,000kPa operating pressure with 1,600kPa (higher-pressure option available)

PLANS/DRAWINGS

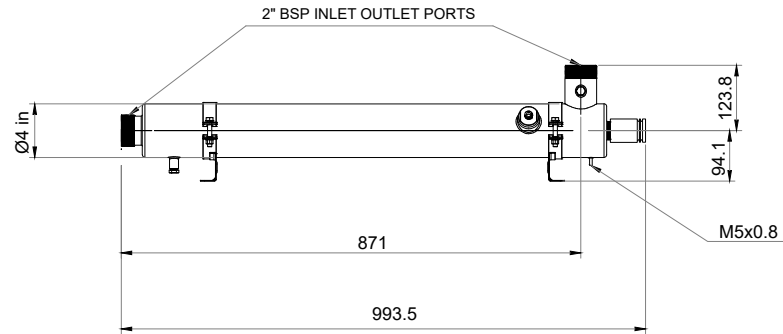

ISOMETRIC VIEW

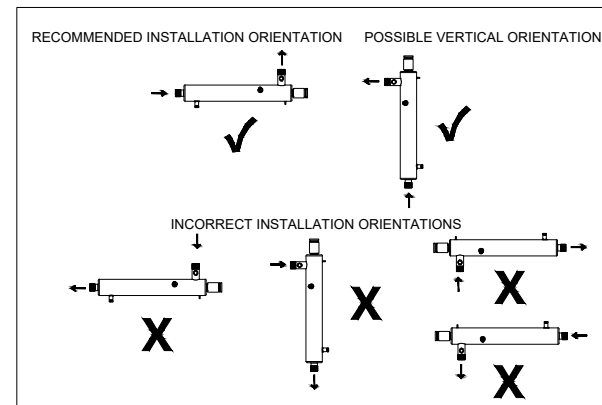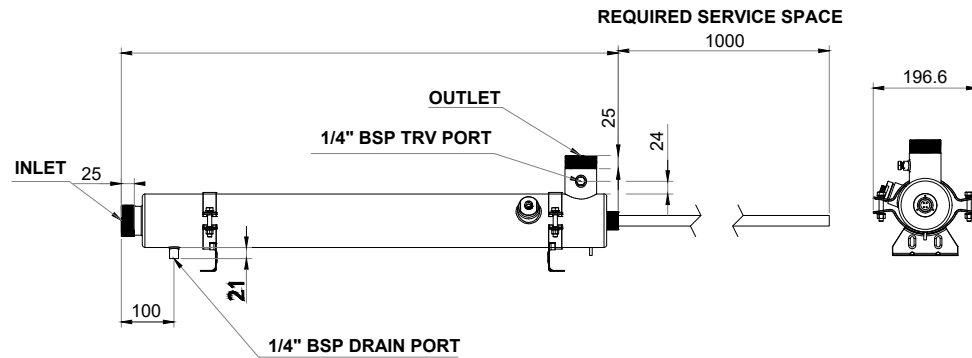

STANDARD NOTES:

- 1) SOUTHLAND FILTRATION SHALL SUPPLY AND INSTALL ALL EQUIPMENT AND PIPE WORK WITHIN THE BATTERY LIMITS STATED IN THE DRAWINGS UNLESS NOTED OTHERWISE.
- 2) PIPING ROUTES ARE INDICATIVE ONLY AND WILL BE SITE RUN TO SUIT FINAL LOCATIONS OF EQUIPMENT. PIPING SHALL BE INSTALLED AND SUPPORTED IN ACCORDANCE WITH AS/NZS 3500.
- 3) ALL ELECTRICAL WORKS (POWER AND CONTROL) SHALL BE BY CUSTOMER ("OTHERS") UNLESS NOTED OTHERWISE.
- 4) EACH 240V GPO SHALL BE SINGLE OUTLET ONLY, FLAT FACED AND IP54 RATED.
- 5) THREE PHASE CONNECTIONS TO EQUIPMENT SHALL BE PROVIDED WITH WALL MOUNTED ISOLATOR EXTERNAL TO EQUIPMENT. COMMANDO STYLE PLUGS SHALL BE USED WHERE SPECIFICALLY NOTED.
- 6) DRAIN LINE PENETRATIONS THROUGH FLOOR SHALL BE SUPPLIED WITH AN OPEN TUNDISH AS NOTED ON DRAWINGS.



SOUTHLAND FILTRATION PTY LTD
www.southlandfiltration.com.au
1800 656 771

© Copyright. This drawing is the property of Southland Filtration Pty Ltd. No reproduction or modification allowed without prior agreement.

REVISION NO.	DESCRIPTION	DATE	DRAWN	ENGINEER	AUTHORISED
0	FOR INFORMATION ONLY	1.03.2026	JM	RM	AC

FOR INFORMATION	
DRAWING NUMBER:	SOUTHLAND FILTRATION
REVISION:	0
CAD FILE:	-
SCALE:	1:3
SHEET SIZE:	A3

CLIENT:	SOUTHLAND FILTRATION
PROJECT:	C1200
TITLE:	GENERAL ARRANGEMENT

SPECIFICATIONS

PRODUCT CODE

SV1200-C

FLOW RATES

Rated flow at dose 16 mJ/cm ² @ 95% UVT	264.6 L/m (4.41 L/s)
Rated flow at dose 25 mJ/cm ² @ 95% UVT	211.2 L/m (3.52 L/s)
Rated flow at dose 30 mJ/cm ² @ 95% UVT	176.4 L/m (2.94 L/s)
Rated flow at dose 40 mJ/cm ² @ 95% UVT	133.2 L/m (2.22 L/s)

OPERATING PARAMETERS

Max Operating Pressure	1000kPa
Ambient Air Temperature	0°C - 40°C
Influent Water Temperature	2°C - 37°C
Installation Orientation	Horizontal mounting with outlet pointing up

REACTOR

Chamber Material	Stainless Steel G316L, Electropolished
In-Outlet Connection	2" (50mm) Male BSPT
Reactor Volume (L)	6.5L
Reactor Length Overall (~mm)	1,006mm
Space Required for Servicing (~mm)	1,000mm
Reactor Dry Weight (Kg)	5.4kg
Operating Pressure (Max)	10 Bar
Lamp Power (W)	127W
UV-C Output (W)	43W
Number of Lamps (Each Unit)	1ea
Lamp Life (Hrs)	12,000 Hours

POWER SUPPLY BOX

Input	220-240 VAC, 50-60 Hz
Power Consumption (W)	145W
Power Box Dimensions (mm)	400 x 300 x 200 mm
Power Box Weight (Kg)	9kg
IP Rating	IP23
Lamp Lead Length (M)	2m

FEATURES:

- Lamp parallel to water flow
- View/monitor port
- Easy to install brackets
- Watermark approved

OPTIONS:

- UV intensity monitor
- Spare set of volt free contacts
- Higher IP rating
- Warm/Hot Water Version available
- Enclosure material 316ss, or glass reinforced polyester
- Longer lamp lead
- Different mains supply
- Chamber thermostat with solenoid valve for over-temperature protection

Disclaimer. Southland Filtration reserves the right to, at any time change any details of design, specifications and performance figures of any published data.


Freecall 1800 656 771
southlandfiltration.com.au

southland
FILTRATION



SV1500-C**ULTRA-VIOLET
DISINFECTION
SYSTEMS****SKAN UV-C SERIES****FEATURES**

- Suitable for drinking and process water disinfection
- Configurable for treated wastewater and other low UV-transmission liquids
- Robust stainless-steel reactor for long service life
- Consistent UV performance from high-output lamps
- Integrated lamp status indication with alarm functionality
- Volt-free contacts for remote fault monitoring
- Rated for 1,000kPa operating pressure with 1,600kPa (higher-pressure option available)

PLANS/DRAWINGS

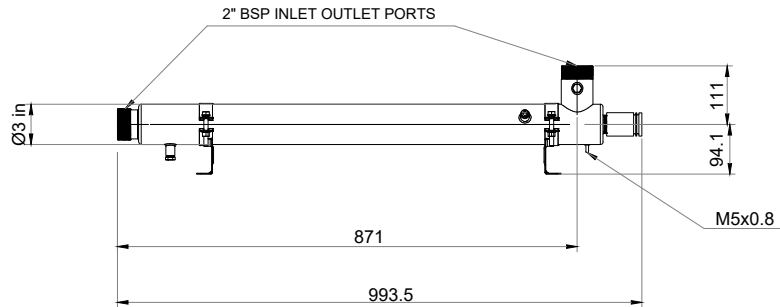

ISOMETRIC VIEW

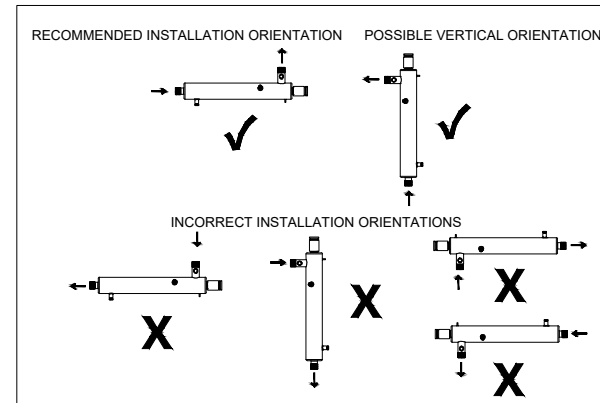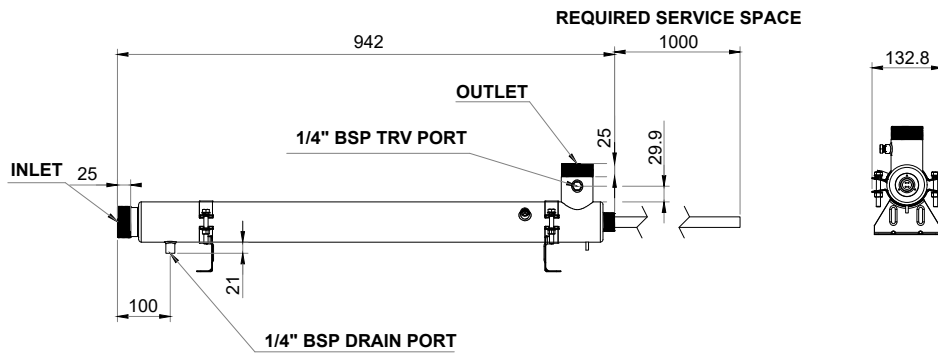

- STANDARD NOTES:**
- 1) SOUTHLAND FILTRATION SHALL SUPPLY AND INSTALL ALL EQUIPMENT AND PIPE WORK WITHIN THE BATTERY LIMITS STATED IN THE DRAWINGS UNLESS NOTED OTHERWISE.
 - 2) PIPING ROUTES ARE INDICATIVE ONLY AND WILL BE SITE RUN TO SUIT FINAL LOCATIONS OF EQUIPMENT. PIPING SHALL BE INSTALLED AND SUPPORTED IN ACCORDANCE WITH AS/NZS 3500.
 - 3) ALL ELECTRICAL WORKS (POWER AND CONTROL) SHALL BE BY CUSTOMER ("OTHERS") UNLESS NOTED OTHERWISE.
 - 4) EACH 240V GPO SHALL BE SINGLE OUTLET ONLY, FLAT FACED AND IP54 RATED.
 - 5) THREE PHASE CONNECTIONS TO EQUIPMENT SHALL BE PROVIDED WITH WALL MOUNTED ISOLATOR EXTERNAL TO EQUIPMENT. COMMANDO STYLE PLUGS SHALL BE USED WHERE SPECIFICALLY NOTED.
 - 6) DRAIN LINE PENETRATIONS THROUGH FLOOR SHALL BE SUPPLIED WITH AN OPEN TUNDISH AS NOTED ON DRAWINGS.



© Copyright. This drawing is the property of Southland Filtration Pty Ltd. No reproduction or modification allowed without prior agreement.

REVISION NO.	DESCRIPTION	DATE	DRAWN	ENGINEER	AUTHORISED
0	FOR INFORMATION ONLY	13/03/20	JM	RM	AC

FOR INFORMATION	
DRAWING NUMBER:	SOUTHLAND FILTRATION
CAD FILE:	-
SCALE:	1:3

CLIENT:	SOUTHLAND FILTRATION
PROJECT:	C1500
TITLE:	GENERAL ARRANGEMENT

SPECIFICATIONS

PRODUCT CODE

SV1500-C

FLOW RATES

Rated flow at dose 16 mJ/cm ² @ 95% UVT	306 L/m (5.1 L/s)
Rated flow at dose 25 mJ/cm ² @ 95% UVT	195 L/m (3.25L/s)
Rated flow at dose 30 mJ/cm ² @ 95% UVT	162 L/m (2.70 L/s)
Rated flow at dose 40 mJ/cm ² @ 95% UVT	121.2 L/m (2.02 L/s)

OPERATING PARAMETERS

Max Operating Pressure	1000kPa
Ambient Air Temperature	0°C - 40°C
Influent Water Temperature	2°C - 37°C
Installation Orientation	Horizontal mounting with outlet pointing up

REACTOR

Chamber Material	Stainless Steel G316L, Electropolished
In-Outlet Connection	2" (50mm) Male BSPT
Reactor Volume (L)	3.6L
Reactor Length Overall (~mm)	1,006mm
Space Required for Servicing (~mm)	1,000mm
Reactor Dry Weight (Kg)	3.7kg
Operating Pressure (Max)	10 Bar
Lamp Power (W)	172W
UV-C Output (W)	55W
Number of Lamps (Each Unit)	1ea
Lamp Life (Hrs)	12,000 Hours

POWER SUPPLY BOX

Input	220-240 VAC, 50-60 Hz
Power Consumption (W)	190W
Power Box Dimensions (mm)	380 x 280 x 130 mm
Power Box Weight (Kg)	9kg
IP Rating	IP54
Lamp Lead Length (M)	2m

FEATURES:

- Lamp parallel to water flow
- View/monitor port
- Easy to install brackets
- Watermark approved

OPTIONS:

- UV intensity monitor
- Spare set of volt free contacts
- Warm/Hot Water Version available
- Enclosure material 316ss, or glass reinforced polyester
- Longer lamp lead
- Different mains supply
- Chamber thermostat with solenoid valve for over-temperature protection

Disclaimer. Southland Filtration reserves the right to, at any time change any details of design, specifications and performance figures of any published data.


Freecall 1800 656 771
southlandfiltration.com.au

southland
FILTRATION



SV1600-C**ULTRA-VIOLET
DISINFECTION
SYSTEMS****SKAN UV-C SERIES****FEATURES**

- Suitable for drinking and process water disinfection
- Configurable for treated wastewater and other low UV-transmission liquids
- Robust stainless-steel reactor for long service life
- Consistent UV performance from high-output lamps
- Integrated lamp status indication with alarm functionality
- Volt-free contacts for remote fault monitoring
- Rated for 1,000kPa operating pressure with 1,600kPa (higher-pressure option available)

PLANS/DRAWINGS

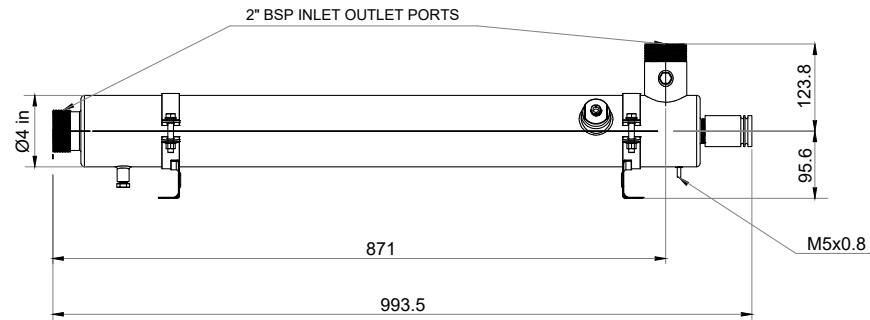

ISOMETRIC VIEW

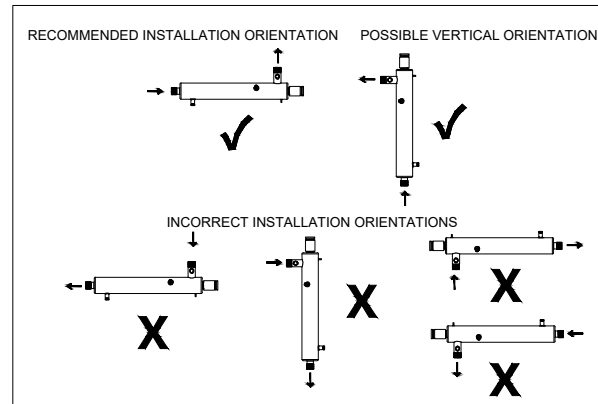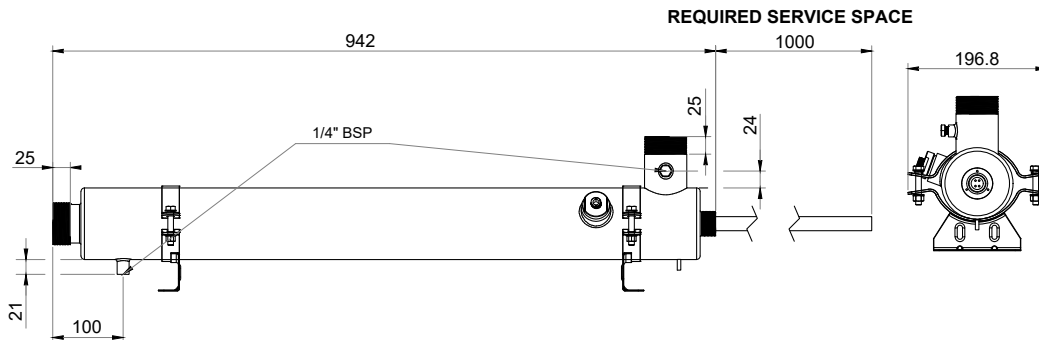

- STANDARD NOTES:**
- 1) SOUTHLAND FILTRATION SHALL SUPPLY AND INSTALL ALL EQUIPMENT AND PIPE WORK WITHIN THE BATTERY LIMITS STATED IN THE DRAWINGS UNLESS NOTED OTHERWISE.
 - 2) PIPING ROUTES ARE INDICATIVE ONLY AND WILL BE SITE RUN TO SUIT FINAL LOCATIONS OF EQUIPMENT. PIPING SHALL BE INSTALLED AND SUPPORTED IN ACCORDANCE WITH AS/NZS 3500.
 - 3) ALL ELECTRICAL WORKS (POWER AND CONTROL) SHALL BE BY CUSTOMER ("OTHERS") UNLESS NOTED OTHERWISE.
 - 4) EACH 240V GPO SHALL BE SINGLE OUTLET ONLY, FLAT FACED AND IP54 RATED.
 - 5) THREE PHASE CONNECTIONS TO EQUIPMENT SHALL BE PROVIDED WITH WALL MOUNTED ISOLATOR EXTERNAL TO EQUIPMENT. COMMANDO STYLE PLUGS SHALL BE USED WHERE SPECIFICALLY NOTED.
 - 6) DRAIN LINE PENETRATIONS THROUGH FLOOR SHALL BE SUPPLIED WITH AN OPEN TUNDRISH AS NOTED ON DRAWINGS.



© Copyright. This drawing is the property of Southland Filtration Pty Ltd. No reproduction or modification allowed without prior agreement.

0	FOR INFORMATION ONLY	03/2024	JM	RM	AC
REVISION NO.	DESCRIPTION	DATE	DRAWN	ENGINEER	AUTHORISED

FOR INFORMATION	
SOUTHLAND FILTRATION	
DRAWING NUMBER: -	REVISION: 0
CAD FILE: -	SCALE: 1:3
SHEET SIZE: A3	

CLIENT	SOUTHLAND FILTRATION
PROJECT	C1600
TITLE	GENERAL ARRANGEMENT

SPECIFICATIONS

PRODUCT CODE

SV1600-C

FLOW RATES

Rated flow at dose 16 mJ/cm ² @ 95% UVT	450 L/m (7.5 L/s)
Rated flow at dose 25 mJ/cm ² @ 95% UVT	288 L/m (4.80 L/s)
Rated flow at dose 30 mJ/cm ² @ 95% UVT	240 L/m (4.0 L/s)
Rated flow at dose 40 mJ/cm ² @ 95% UVT	180 L/m (3.0 L/s)

OPERATING PARAMETERS

Max Operating Pressure	1000kPa
Ambient Air Temperature	0°C - 40°C
Influent Water Temperature	2°C - 37°C
Installation Orientation	Horizontal mounting with outlet pointing up

REACTOR

Chamber Material	Stainless Steel G316L, Electropolished
In-Outlet Connection	2" (50mm) Male BSPT
Reactor Volume (L)	6.5L
Reactor Length Overall (~mm)	1,006mm
Space Required for Servicing (~mm)	1,000mm
Reactor Dry Weight (Kg)	5.4kg
Operating Pressure (Max)	10 Bar
Lamp Power (W)	172W
UV-C Output (W)	55W
Number of Lamps (Each Unit)	1ea
Lamp Life (Hrs)	12,000 Hours

POWER SUPPLY BOX

Input	220-240 VAC, 50-60 Hz
Power Consumption (W)	190W
Power Box Dimensions (mm)	400 x 400 x 200 mm
Power Box Weight (Kg)	12kg
IP Rating	IP54
Lamp Lead Length (M)	2m

FEATURES:

- Lamp parallel to water flow
- View/monitor port
- Easy to install brackets
- Watermark approved

OPTIONS:

- UV intensity monitor
- Spare set of volt free contacts
- Warm/Hot Water Version available
- Enclosure material 316ss, or glass reinforced polyester
- Longer lamp lead
- Different mains supply
- Chamber thermostat with solenoid valve for over-temperature protection

Disclaimer. Southland Filtration reserves the right to, at any time change any details of design, specifications and performance figures of any published data.


Freecall 1800 656 771
southlandfiltration.com.au

southland
FILTRATION



SV1700-C**ULTRA-VIOLET
DISINFECTION
SYSTEMS****SKAN UV-C SERIES****FEATURES**

- Suitable for drinking and process water disinfection
- Configurable for treated wastewater and other low UV-transmission liquids
- Robust stainless-steel reactor for long service life
- Consistent UV performance from high-output lamps
- Integrated lamp status indication with alarm functionality
- Volt-free contacts for remote fault monitoring
- Rated for 1,000kPa operating pressure with 1,600kPa (higher-pressure option available)

PLANS/DRAWINGS

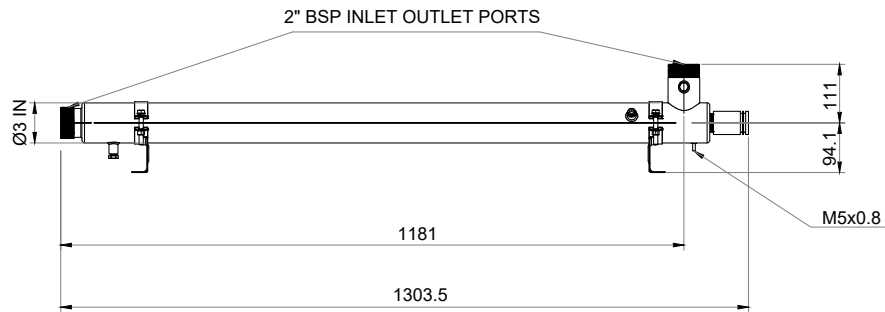

ISOMETRIC VIEW

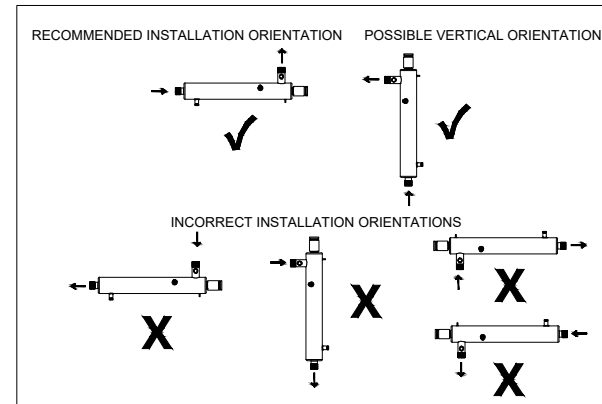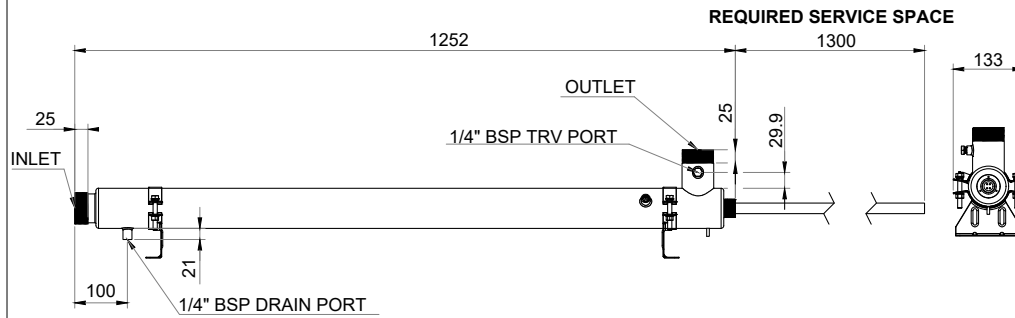

- STANDARD NOTES:**
- 1) SOUTHLAND FILTRATION SHALL SUPPLY AND INSTALL ALL EQUIPMENT AND PIPE WORK WITHIN THE BATTERY LIMITS STATED IN THE DRAWINGS UNLESS NOTED OTHERWISE.
 - 2) PIPING ROUTES ARE INDICATIVE ONLY AND WILL BE SITE RUN TO SUIT FINAL LOCATIONS OF EQUIPMENT. PIPING SHALL BE INSTALLED AND SUPPORTED IN ACCORDANCE WITH AS/NZS 3500.
 - 3) ALL ELECTRICAL WORKS (POWER AND CONTROL) SHALL BE BY CUSTOMER ("OTHERS") UNLESS NOTED OTHERWISE.
 - 4) EACH 240V GPO SHALL BE SINGLE OUTLET ONLY, FLAT FACED AND IP54 RATED.
 - 5) THREE PHASE CONNECTIONS TO EQUIPMENT SHALL BE PROVIDED WITH WALL MOUNTED ISOLATOR EXTERNAL TO EQUIPMENT. COMMANDO STYLE PLUGS SHALL BE USED WHERE SPECIFICALLY NOTED.
 - 6) DRAIN LINE PENETRATIONS THROUGH FLOOR SHALL BE SUPPLIED WITH AN OPEN TUNDISH AS NOTED ON DRAWINGS.



© Copyright. This drawing is the property of Southland Filtration Pty Ltd. No reproduction or modification allowed without prior agreement.

REVISION NO.	DESCRIPTION	DATE	DRAWN	ENGINEER	AUTHORISED
0	FOR INFORMATION ONLY	13/03/2018	JM	RM	AC

FOR INFORMATION	
DRAWING NUMBER:	SOUTHLAND FILTRATION
CAD FILE:	
SCALE:	1:3

CLIENT:	SOUTHLAND FILTRATION
PROJECT:	C1700
TITLE:	GENERAL ARRANGEMENT

SPECIFICATIONS

PRODUCT CODE

SV1700-C

FLOW RATES

Rated flow at dose 16 mJ/cm ² @ 95% UVT	257.4 L/m (4.29 L/s)
Rated flow at dose 25 mJ/cm ² @ 95% UVT	204.6 L/m (3.41 L/s)
Rated flow at dose 30 mJ/cm ² @ 95% UVT	171.6 L/m (2.86 L/s)
Rated flow at dose 40 mJ/cm ² @ 95% UVT	127.8 L/m (2.13 L/s)

OPERATING PARAMETERS

Max Operating Pressure	1000kPa
Ambient Air Temperature	0°C - 40°C
Influent Water Temperature	2°C - 37°C
Installation Orientation	Horizontal mounting with outlet pointing up

REACTOR

Chamber Material	Stainless Steel G316L, Electropolished
In-Outlet Connection	2" (50mm) Male BSPT
Reactor Volume (L)	4.7L
Reactor Length Overall (~mm)	1,315 mm
Space Required for Servicing (~mm)	1,300 mm
Reactor Dry Weight (Kg)	8kg
Operating Pressure (Max)	10 Bar
Lamp Power (W)	200W
UV-C Output (W)	57W
Number of Lamps (Each Unit)	1ea
Lamp Life (Hrs)	12,000 Hours

POWER SUPPLY BOX

Input	220-240 VAC, 50-60 Hz
Power Consumption (W)	200W
Power Box Dimensions (mm)	400 x 300 x 200 mm
Power Box Weight (Kg)	12kg
IP Rating	IP23
Lamp Lead Length (M)	2m

FEATURES:

- Lamp parallel to water flow
- View/monitor port
- Easy to install brackets
- Watermark approved

OPTIONS:

- UV intensity monitor
- Spare set of volt free contacts
- Higher IP rating
- Warm/Hot Water Version available
- Enclosure material 316ss, or glass reinforced polyester
- Longer lamp lead
- Different mains supply
- Chamber thermostat with solenoid valve for over-temperature protection

Disclaimer. Southland Filtration reserves the right to, at any time change any details of design, specifications and performance figures of any published data.


Freecall 1800 656 771
southlandfiltration.com.au

southland
FILTRATION




SV1800-C**ULTRA-VIOLET
DISINFECTION
SYSTEMS****SKAN UV-C SERIES****FEATURES**

- Suitable for drinking and process water disinfection
- Configurable for treated wastewater and other low UV-transmission liquids
- Robust stainless-steel reactor for long service life
- Consistent UV performance from high-output lamps
- Integrated lamp status indication with alarm functionality
- Volt-free contacts for remote fault monitoring
- Rated for 1,000kPa operating pressure with 1,600kPa (higher-pressure option available)

PLANS/DRAWINGS

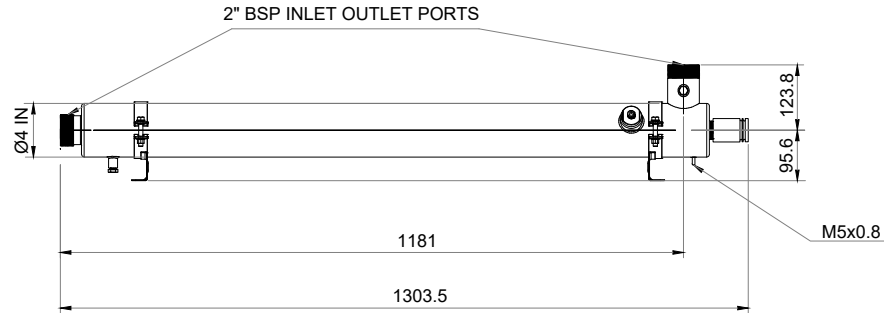

ISOMETRIC VIEW

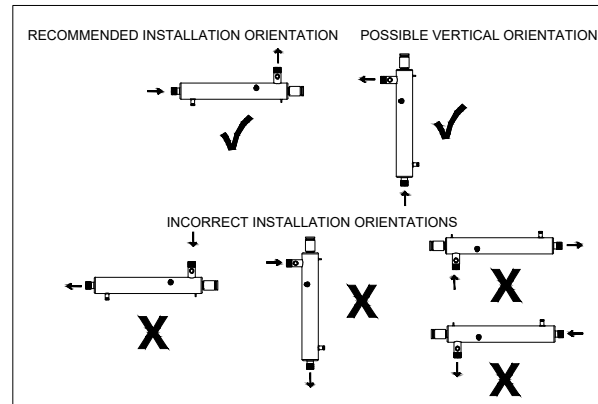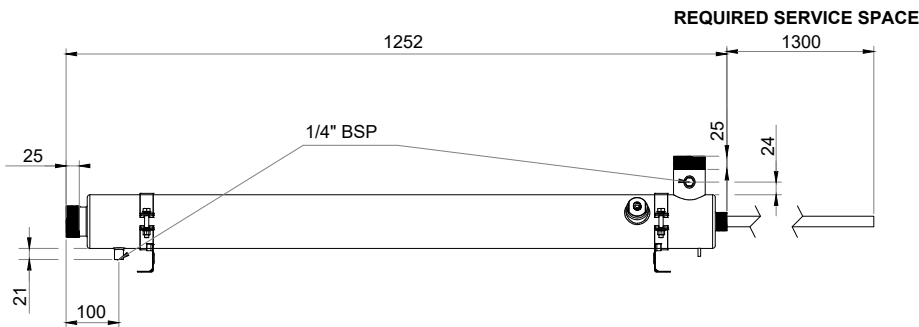

- STANDARD NOTES:**
- 1) SOUTHLAND FILTRATION SHALL SUPPLY AND INSTALL ALL EQUIPMENT AND PIPE WORK WITHIN THE BATTERY LIMITS STATED IN THE DRAWINGS UNLESS NOTED OTHERWISE.
 - 2) PIPING ROUTES ARE INDICATIVE ONLY AND WILL BE SITE RUN TO SUIT FINAL LOCATIONS OF EQUIPMENT. PIPING SHALL BE INSTALLED AND SUPPORTED IN ACCORDANCE WITH AS/NZS 3500.
 - 3) ALL ELECTRICAL WORKS (POWER AND CONTROL) SHALL BE BY CUSTOMER ("OTHERS") UNLESS NOTED OTHERWISE.
 - 4) EACH 240V GPO SHALL BE SINGLE OUTLET ONLY, FLAT FACED AND IP54 RATED.
 - 5) THREE PHASE CONNECTIONS TO EQUIPMENT SHALL BE PROVIDED WITH WALL MOUNTED ISOLATOR EXTERNAL TO EQUIPMENT. COMMANDO STYLE PLUGS SHALL BE USED WHERE SPECIFICALLY NOTED.
 - 6) DRAIN LINE PENETRATIONS THROUGH FLOOR SHALL BE SUPPLIED WITH AN OPEN TUNDISH AS NOTED ON DRAWINGS.



© Copyright. This drawing is the property of Southland Filtration Pty Ltd. No reproduction or modification allowed without prior agreement.

REVISION NO.	DESCRIPTION	DATE	DRAWN	ENGINEER	AUTHORISED
0	FOR INFORMATION ONLY	10/03/2020	JM	RM	AC

FOR INFORMATION	
DRAWING NUMBER:	SOUTHLAND FILTRATION
CAD FILE:	-
SCALE:	1:3

CLIENT	SOUTHLAND FILTRATION
PROJECT	C1800
TITLE	GENERAL ARRANGEMENT

SPECIFICATIONS

PRODUCT CODE

SV1800-C

FLOW RATES

Rated flow at dose 16 mJ/cm ² @ 95% UVT	367.2 L/m (6.12 L/s)
Rated flow at dose 25 mJ/cm ² @ 95% UVT	296.4 L/m (4.94 L/s)
Rated flow at dose 30 mJ/cm ² @ 95% UVT	244.8 L/m (4.08 L/s)
Rated flow at dose 40 mJ/cm ² @ 95% UVT	183 L/m (3.05 L/s)

OPERATING PARAMETERS

Max Operating Pressure	1000kPa
Ambient Air Temperature	0°C - 40°C
Influent Water Temperature	2°C - 37°C
Installation Orientation	Horizontal mounting with outlet pointing up

REACTOR

Chamber Material	Stainless Steel G316L, Electropolished
In-Outlet Connection	2" (50mm) Male BSPT
Reactor Volume (L)	8.7L
Reactor Length Overall (~mm)	1,315 mm
Space Required for Servicing (~mm)	1,300 mm
Reactor Dry Weight (Kg)	11.3kg
Operating Pressure (Max)	10 Bar
Lamp Power (W)	180W
UV-C Output (W)	57W
Number of Lamps (Each Unit)	1ea
Lamp Life (Hrs)	12,000 Hours

POWER SUPPLY BOX

Input	220-240 VAC, 50-60 Hz
Power Consumption (W)	180W
Power Box Dimensions (mm)	400 x 300 x 200 mm
Power Box Weight (Kg)	12kg
IP Rating	IP23
Lamp Lead Length (M)	2m

FEATURES:

- Lamp parallel to water flow
- View/monitor port
- Easy to install brackets
- Watermark approved

OPTIONS:

- UV intensity monitor
- Spare set of volt free contacts
- Higher IP rating
- Warm/Hot Water Version available
- Enclosure material 316ss, or glass reinforced polyester
- Longer lamp lead
- Different mains supply
- Chamber thermostat with solenoid valve for over-temperature protection

Disclaimer. Southland Filtration reserves the right to, at any time change any details of design, specifications and performance figures of any published data.


Freecall 1800 656 771
southlandfiltration.com.au

southland
FILTRATION




SV1900-C**ULTRA-VIOLET
DISINFECTION
SYSTEMS****SKAN UV-C SERIES****FEATURES**

- Suitable for drinking and process water disinfection
- Configurable for treated wastewater and other low UV-transmission liquids
- Robust stainless-steel reactor for long service life
- Consistent UV performance from high-output lamps
- Integrated lamp status indication with alarm functionality
- Volt-free contacts for remote fault monitoring
- Rated for 1,000kPa operating pressure with 1,600kPa (higher-pressure option available)

PLANS/DRAWINGS

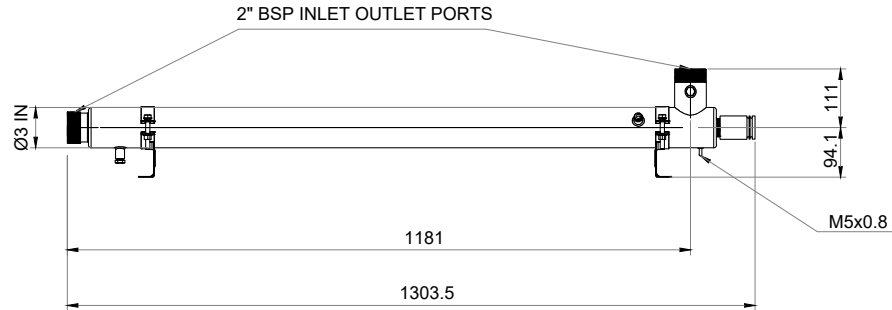

ISOMETRIC VIEW

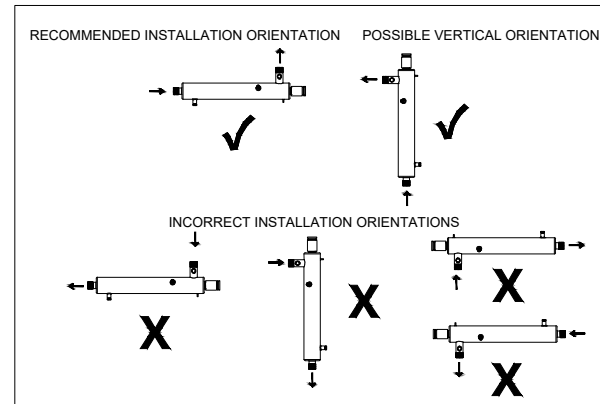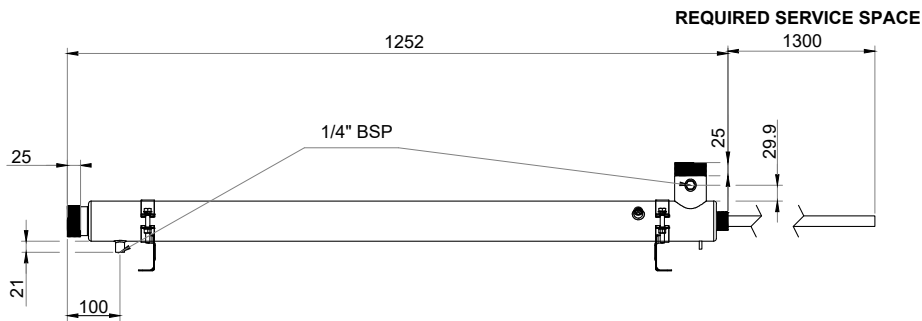

- STANDARD NOTES:**
- 1) SOUTHLAND FILTRATION SHALL SUPPLY AND INSTALL ALL EQUIPMENT AND PIPE WORK WITHIN THE BATTERY LIMITS STATED IN THE DRAWINGS UNLESS NOTED OTHERWISE.
 - 2) PIPING ROUTES ARE INDICATIVE ONLY AND WILL BE SITE RUN TO SUIT FINAL LOCATIONS OF EQUIPMENT. PIPING SHALL BE INSTALLED AND SUPPORTED IN ACCORDANCE WITH AS/NZS 3500.
 - 3) ALL ELECTRICAL WORKS (POWER AND CONTROL) SHALL BE BY CUSTOMER ("OTHERS") UNLESS NOTED OTHERWISE.
 - 4) EACH 240V GPO SHALL BE SINGLE OUTLET ONLY, FLAT FACED AND IP54 RATED.
 - 5) THREE PHASE CONNECTIONS TO EQUIPMENT SHALL BE PROVIDED WITH WALL MOUNTED ISOLATOR EXTERNAL TO EQUIPMENT. COMMANDO STYLE PLUGS SHALL BE USED WHERE SPECIFICALLY NOTED.
 - 6) DRAIN LINE PENETRATIONS THROUGH FLOOR SHALL BE SUPPLIED WITH AN OPEN TUNDISH AS NOTED ON DRAWINGS.



© Copyright. This drawing is the property of Southland Filtration Pty Ltd. No reproduction or modification allowed without prior agreement.

REVISION NO.	DESCRIPTION	DATE	DRAWN	ENGINEER	AUTHORISED
0	FOR INFORMATION ONLY	11.03.2020	JM	RM	AC

FOR INFORMATION	
DRAWING NUMBER:	SOUTHLAND FILTRATION
REVISION:	0
CAD FILE:	
SCALE:	1:3
SHEET SIZE:	A3

CLIENT:	SOUTHLAND FILTRATION
PROJECT:	C1900
TITLE:	GENERAL ARRANGEMENT

SPECIFICATIONS

PRODUCT CODE

SV1900-C

FLOW RATES

Rated flow at dose 16 mJ/cm ² @ 95% UVT	456 L/m (7.6 L/s)
Rated flow at dose 25 mJ/cm ² @ 95% UVT	289.8 L/m (4.83 L/s)
Rated flow at dose 30 mJ/cm ² @ 95% UVT	241.2 L/m (4.02 L/s)
Rated flow at dose 40 mJ/cm ² @ 95% UVT	183 L/m (3.05 L/s)

OPERATING PARAMETERS

Max Operating Pressure	1000kPa
Ambient Air Temperature	0°C - 40°C
Influent Water Temperature	2°C - 37°C
Installation Orientation	Horizontal mounting with outlet pointing up

REACTOR

Chamber Material	Stainless Steel G316L, Electropolished
In-Outlet Connection	2" (50mm) Male BSPT
Reactor Volume (L)	4.7L
Reactor Length Overall (~mm)	1,315 mm
Space Required for Servicing (~mm)	1,300 mm
Reactor Dry Weight (Kg)	8kg
Operating Pressure (Max)	10 Bar
Lamp Power (W)	240W
UV-C Output (W)	76W
Number of Lamps (Each Unit)	1ea
Lamp Life (Hrs)	12,000 Hours

POWER SUPPLY BOX

Input	220-240 VAC, 50-60 Hz
Power Consumption (W)	240W
Power Box Dimensions (mm)	380 x 280 x 130 mm
Power Box Weight (Kg)	9kg
IP Rating	IP54
Lamp Lead Length (M)	2m

FEATURES:

- Lamp parallel to water flow
- View/monitor port
- Easy to install brackets
- Watermark approved

OPTIONS:

- UV intensity monitor
- Spare set of volt free contacts
- Warm/Hot Water Version available
- Enclosure material 316ss, or glass reinforced polyester
- Longer lamp lead
- Different mains supply
- Chamber thermostat with solenoid valve for over-temperature protection

Disclaimer. Southland Filtration reserves the right to, at any time change any details of design, specifications and performance figures of any published data.


Freecall 1800 656 771
southlandfiltration.com.au

southland
FILTRATION



SV2000-C**ULTRA-VIOLET
DISINFECTION
SYSTEMS****SKAN UV-C SERIES****FEATURES**

- Suitable for drinking and process water disinfection
- Configurable for treated wastewater and other low UV-transmission liquids
- Robust stainless-steel reactor for long service life
- Consistent UV performance from high-output lamps
- Integrated lamp status indication with alarm functionality
- Volt-free contacts for remote fault monitoring
- Rated for 1,000kPa operating pressure with 1,600kPa (higher-pressure option available)

PLANS/DRAWINGS

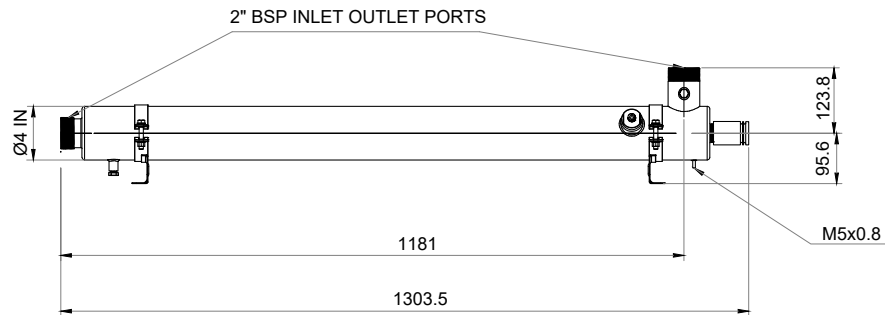

ISOMETRIC VIEW

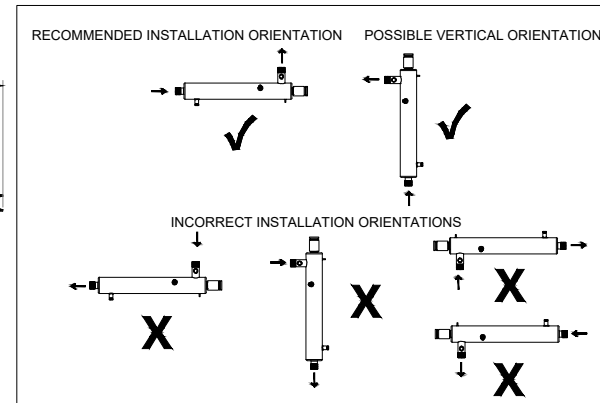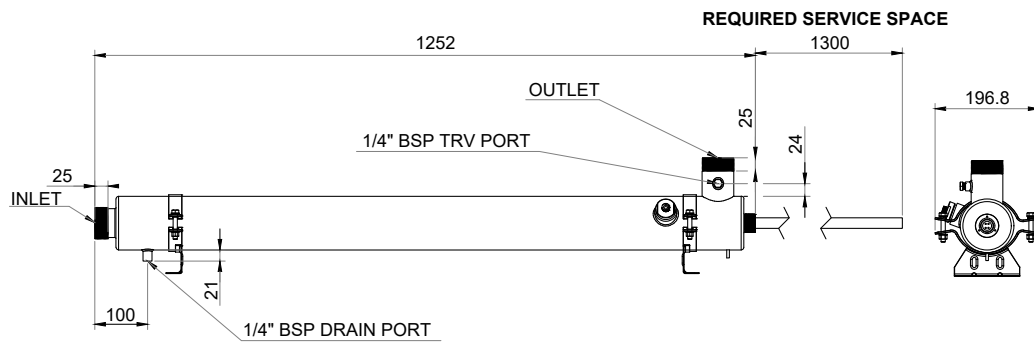

- STANDARD NOTES:**
- 1) SOUTHLAND FILTRATION SHALL SUPPLY AND INSTALL ALL EQUIPMENT AND PIPE WORK WITHIN THE BATTERY LIMITS STATED IN THE DRAWINGS UNLESS NOTED OTHERWISE.
 - 2) PIPING ROUTES ARE INDICATIVE ONLY AND WILL BE SITE RUN TO SUIT FINAL LOCATIONS OF EQUIPMENT. PIPING SHALL BE INSTALLED AND SUPPORTED IN ACCORDANCE WITH AS/NZS 3500.
 - 3) ALL ELECTRICAL WORKS (POWER AND CONTROL) SHALL BE BY CUSTOMER ("OTHERS") UNLESS NOTED OTHERWISE.
 - 4) EACH 240V GPO SHALL BE SINGLE OUTLET ONLY, FLAT FACED AND IP54 RATED.
 - 5) THREE PHASE CONNECTIONS TO EQUIPMENT SHALL BE PROVIDED WITH WALL MOUNTED ISOLATOR EXTERNAL TO EQUIPMENT. COMMANDO STYLE PLUGS SHALL BE USED WHERE SPECIFICALLY NOTED.
 - 6) DRAIN LINE PENETRATIONS THROUGH FLOOR SHALL BE SUPPLIED WITH AN OPEN TUNDRISH AS NOTED ON DRAWINGS.



© Copyright. This drawing is the property of Southland Filtration Pty Ltd. No reproduction or modification allowed without prior agreement.

REVISION NO.	DESCRIPTION	DATE	DRAWN	ENGINEER	AUTHORISED
0	FOR INFORMATION ONLY	11.03.2020	JM	RM	AC

FOR INFORMATION	
DRAWING NUMBER:	SOUTHLAND FILTRATION
REVISION:	0
CAD FILE:	
SCALE:	1:3

CLIENT:	SOUTHLAND FILTRATION
PROJECT:	C2000
TITLE:	GENERAL ARRANGEMENT

SPECIFICATIONS

PRODUCT CODE

SV2000-C

FLOW RATES

Rated flow at dose 16 mJ/cm ² @ 95% UVT	525 L/m (8.75 L/s)
Rated flow at dose 25 mJ/cm ² @ 95% UVT	420 L/m (7.0 L/s)
Rated flow at dose 30 mJ/cm ² @ 95% UVT	349.8 L/m (5.83 L/s)
Rated flow at dose 40 mJ/cm ² @ 95% UVT	262.8 L/m (4.38 L/s)

OPERATING PARAMETERS

Max Operating Pressure	1000kPa
Ambient Air Temperature	0°C - 40°C
Influent Water Temperature	2°C - 37°C
Installation Orientation	Horizontal mounting with outlet pointing up

REACTOR

Chamber Material	Stainless Steel G316L, Electropolished
In-Outlet Connection	2" (50mm) Male BSPT
Reactor Volume (L)	8.7L
Reactor Length Overall (~mm)	1,315 mm
Space Required for Servicing (~mm)	1,300 mm
Reactor Dry Weight (Kg)	11.3kg
Operating Pressure (Max)	10 Bar
Lamp Power (W)	240W
UV-C Output (W)	76W
Number of Lamps (Each Unit)	1ea
Lamp Life (Hrs)	12,000 Hours

POWER SUPPLY BOX

Input	220-240 VAC, 50-60 Hz
Power Consumption (W)	270W
Power Box Dimensions (mm)	400 x 400 x 200 mm
Power Box Weight (Kg)	12kg
IP Rating	IP54
Lamp Lead Length (M)	2m

FEATURES:

- Lamp parallel to water flow
- View/monitor port
- Easy to install brackets
- Watermark approved

OPTIONS:

- UV intensity monitor
- Spare set of volt free contacts
- Warm/Hot Water Version available
- Enclosure material 316ss, or glass reinforced polyester
- Longer lamp lead
- Different mains supply
- Chamber thermostat with solenoid valve for over-temperature protection

Disclaimer. Southland Filtration reserves the right to, at any time change any details of design, specifications and performance figures of any published data.


Freecall 1800 656 771
southlandfiltration.com.au

southland
FILTRATION



SV4500-C**ULTRA-VIOLET
DISINFECTION
SYSTEMS****SKAN UV-C SERIES****FEATURES**

- Suitable for drinking and process water disinfection
- Configurable for treated wastewater and other low UV-transmission liquids
- Robust stainless-steel reactor for long service life
- Consistent UV performance from high-output lamps
- Integrated lamp status indication with alarm functionality
- Volt-free contacts for remote fault monitoring
- Rated for 1,000kPa operating pressure with 1,600kPa (higher-pressure option available)

PLANS/DRAWINGS

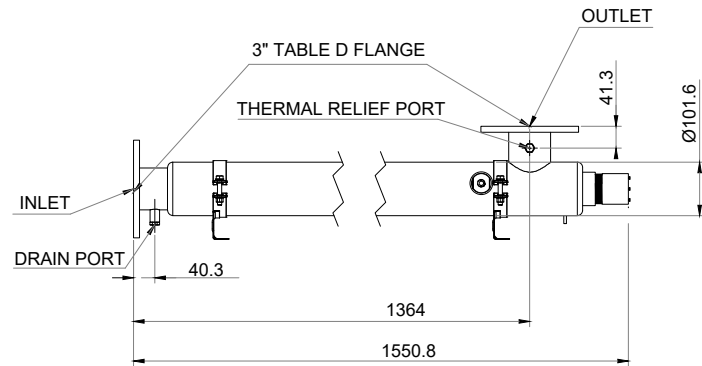

ISOMETRIC VIEW

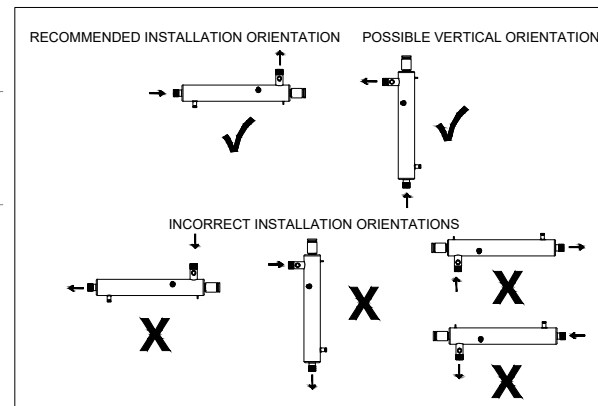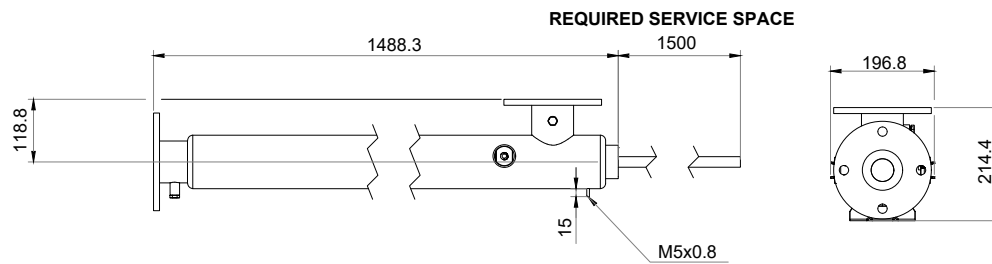

- STANDARD NOTES:**
- 1) SOUTHLAND FILTRATION SHALL SUPPLY AND INSTALL ALL EQUIPMENT AND PIPE WORK WITHIN THE BATTERY LIMITS STATED IN THE DRAWINGS UNLESS NOTED OTHERWISE.
 - 2) PIPING ROUTES ARE INDICATIVE ONLY AND WILL BE SITE RUN TO SUIT FINAL LOCATIONS OF EQUIPMENT. PIPING SHALL BE INSTALLED AND SUPPORTED IN ACCORDANCE WITH AS/NZS 3500.
 - 3) ALL ELECTRICAL WORKS (POWER AND CONTROL) SHALL BE BY CUSTOMER ("OTHERS") UNLESS NOTED OTHERWISE.
 - 4) EACH 240V GPO SHALL BE SINGLE OUTLET ONLY, FLAT FACED AND IP54 RATED.
 - 5) THREE PHASE CONNECTIONS TO EQUIPMENT SHALL BE PROVIDED WITH WALL MOUNTED ISOLATOR EXTERNAL TO EQUIPMENT. COMMANDO STYLE PLUGS SHALL BE USED WHERE SPECIFICALLY NOTED.
 - 6) DRAIN LINE PENETRATIONS THROUGH FLOOR SHALL BE SUPPLIED WITH AN OPEN TUNDISH AS NOTED ON DRAWINGS.



© Copyright. This drawing is the property of Southland Filtration Pty Ltd. No reproduction or modification allowed without prior agreement.

REVISION NO.	DESCRIPTION	DATE	DRAWN	ENGINEER	AUTHORISED
0	FOR INFORMATION ONLY	11/03/2020	JM	RM	AC

FOR INFORMATION	
DRAWING NUMBER:	SOUTHLAND FILTRATION
CAD FILE:	-
SCALE:	1:3

CLIENT	SOUTHLAND FILTRATION
PROJECT	C4500
TITLE	GENERAL ARRANGEMENT

SPECIFICATIONS

PRODUCT CODE

SV4500-C

FLOW RATES

Rated flow at dose 16 mJ/cm ² @ 95% UVT	750 L/m (12.5 L/s)
Rated flow at dose 25 mJ/cm ² @ 95% UVT	598.2 L/m (9.97 L/s)
Rated flow at dose 30 mJ/cm ² @ 95% UVT	529.8 L/m (8.33 L/s)
Rated flow at dose 40 mJ/cm ² @ 95% UVT	375 L/m (6.25 L/s)

OPERATING PARAMETERS

Max Operating Pressure	1000kPa
Ambient Air Temperature	0°C - 40°C
Influent Water Temperature	2°C - 37°C
Installation Orientation	Horizontal mounting with outlet pointing up

REACTOR

Chamber Material	Stainless Steel G316L, Electropolished
In-Outlet Connection	3" (80mm) Table E flange
Reactor Volume (L)	9L
Reactor Length Overall (~mm)	1,520 mm
Space Required for Servicing (~mm)	1,500 mm
Reactor Dry Weight (Kg)	18kg
Operating Pressure (Max)	10 Bar
Lamp Power (W)	450W
UV-C Output (W)	157W
Number of Lamps (Each Unit)	1ea
Lamp Life (Hrs)	12,000 Hours

POWER SUPPLY BOX

Input	220-240 VAC, 50-60 Hz, 2.7A
Power Consumption (W)	500W
Power Box Dimensions (mm)	400 x 400 x 200 mm
Power Box Weight (Kg)	12kg
IP Rating	IP54
Lamp Lead Length (M)	2m

FEATURES:

- Lamp parallel to water flow
- View/monitor port
- Easy to install brackets
- Watermark approved

OPTIONS:

- UV intensity monitor
- Spare set of volt free contacts
- Warm/Hot Water Version available
- Enclosure material 316ss, or glass reinforced polyester
- Longer lamp lead
- Different mains supply
- Chamber thermostat with solenoid valve for over-temperature protection

Disclaimer. Southland Filtration reserves the right to, at any time change any details of design, specifications and performance figures of any published data.


Freecall 1800 656 771
southlandfiltration.com.au

southland
FILTRATION



SV5500-C**ULTRA-VIOLET
DISINFECTION
SYSTEMS****SKAN UV-C SERIES****FEATURES**

- Suitable for drinking and process water disinfection
- Configurable for treated wastewater and other low UV-transmission liquids
- Robust stainless-steel reactor for long service life
- Consistent UV performance from high-output lamps
- Integrated lamp status indication with alarm functionality
- Volt-free contacts for remote fault monitoring
- Rated for 1,000kPa operating pressure with 1,600kPa (higher-pressure option available)

PLANS/DRAWINGS

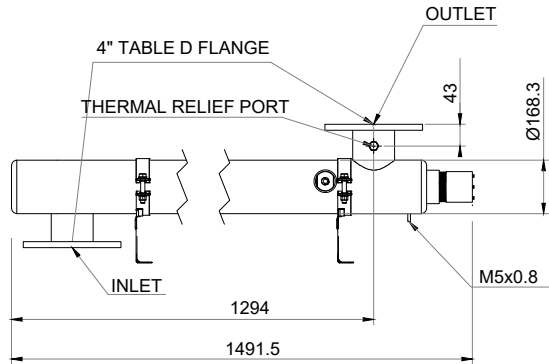

ISOMETRIC VIEW

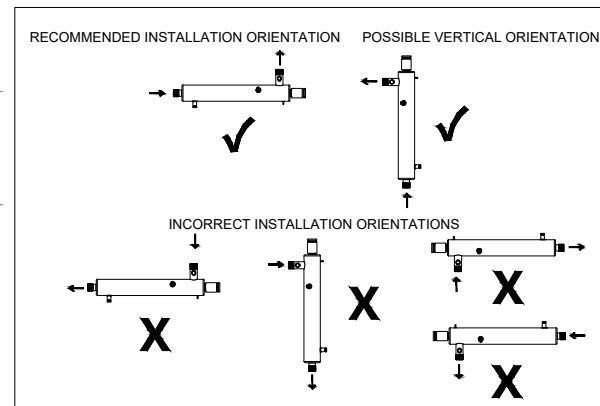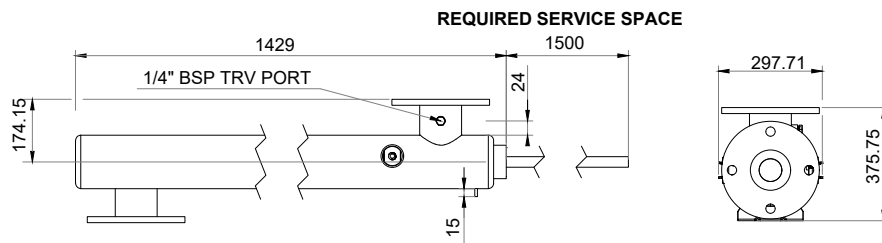

STANDARD NOTES:

- 1) SOUTHLAND FILTRATION SHALL SUPPLY AND INSTALL ALL EQUIPMENT AND PIPE WORK WITHIN THE BATTERY LIMITS STATED IN THE DRAWINGS UNLESS NOTED OTHERWISE.
- 2) PIPING ROUTES ARE INDICATIVE ONLY AND WILL BE SITE RUN TO SUIT FINAL LOCATIONS OF EQUIPMENT. PIPING SHALL BE INSTALLED AND SUPPORTED IN ACCORDANCE WITH AS/NZS 3500.
- 3) ALL ELECTRICAL WORKS (POWER AND CONTROL) SHALL BE BY CUSTOMER ("OTHERS") UNLESS NOTED OTHERWISE.
- 4) EACH 240V GPO SHALL BE SINGLE OUTLET ONLY, FLAT FACED AND IP54 RATED.
- 5) THREE PHASE CONNECTIONS TO EQUIPMENT SHALL BE PROVIDED WITH WALL MOUNTED ISOLATOR EXTERNAL TO EQUIPMENT. COMMANDO STYLE PLUGS SHALL BE USED WHERE SPECIFICALLY NOTED.
- 6) DRAIN LINE PENETRATIONS THROUGH FLOOR SHALL BE SUPPLIED WITH AN OPEN TUNDRISH AS NOTED ON DRAWINGS.



© Copyright. This drawing is the property of Southland Filtration Pty Ltd. No reproduction or modification allowed without prior agreement.

REVISION NO.	DESCRIPTION	DATE	DRAWN	ENGINEER	AUTHORISED
0	FOR INFORMATION ONLY	13/03/2020	JM	RM	AC

FOR INFORMATION	
DRAWING NUMBER:	SOUTHLAND FILTRATION
REVISION:	0
CAD FILE:	-
SCALE:	1:3
SHEET SIZE:	A3

CLIENT:	SOUTHLAND FILTRATION
PROJECT:	C5500
TITLE:	GENERAL ARRANGEMENT

SPECIFICATIONS

PRODUCT CODE

SV5500-C

FLOW RATES

Rated flow at dose 16 mJ/cm ² @ 95% UVT	1298.4 L/m (21.64 L/s)
Rated flow at dose 25 mJ/cm ² @ 95% UVT	1039.8 L/m (17.33 L/s)
Rated flow at dose 30 mJ/cm ² @ 95% UVT	866.4 L/m (14.44 L/s)
Rated flow at dose 40 mJ/cm ² @ 95% UVT	649.8 L/m (10.83 L/s)

OPERATING PARAMETERS

Max Operating Pressure	1000kPa
Ambient Air Temperature	0°C - 40°C
Influent Water Temperature	2°C - 37°C
Installation Orientation	Horizontal mounting with outlet pointing up

REACTOR

Chamber Material	Stainless Steel G316L, Electropolished
In-Outlet Connection	3" (80mm) Table E flange
Reactor Volume (L)	22L
Reactor Length Overall (~mm)	1,520 mm
Space Required for Servicing (~mm)	1,500 mm
Reactor Dry Weight (Kg)	21kg
Operating Pressure (Max)	10 Bar
Lamp Power (W)	450W
UV-C Output (W)	143W
Number of Lamps (Each Unit)	1ea
Lamp Life (Hrs)	12,000 Hours

POWER SUPPLY BOX

Input	220-240 VAC, 50-60 Hz, 2.7A
Power Consumption (W)	500W
Power Box Dimensions (mm)	400 x 400 x 200 mm
Power Box Weight (Kg)	12kg
IP Rating	IP54
Lamp Lead Length (M)	2m

FEATURES:

- Lamp parallel to water flow
- View/monitor port
- Easy to install brackets
- Watermark approved

OPTIONS:

- UV intensity monitor
- Spare set of volt free contacts
- Warm/Hot Water Version available
- Enclosure material 316ss, or glass reinforced polyester
- Longer lamp lead
- Different mains supply
- Chamber thermostat with solenoid valve for over-temperature protection

Disclaimer. Southland Filtration reserves the right to, at any time change any details of design, specifications and performance figures of any published data.

Freecall 1800 656 771
southlandfiltration.com.au

southland
FILTRATION